SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation
DX20a-X (Intel Xeon D-1541)

SPECfp®_rate2006 = 197

SPECfp_rate_base2006 = 192

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Mar-2016
Hardware Availability: Mar-2016
Software Availability: Nov-2015

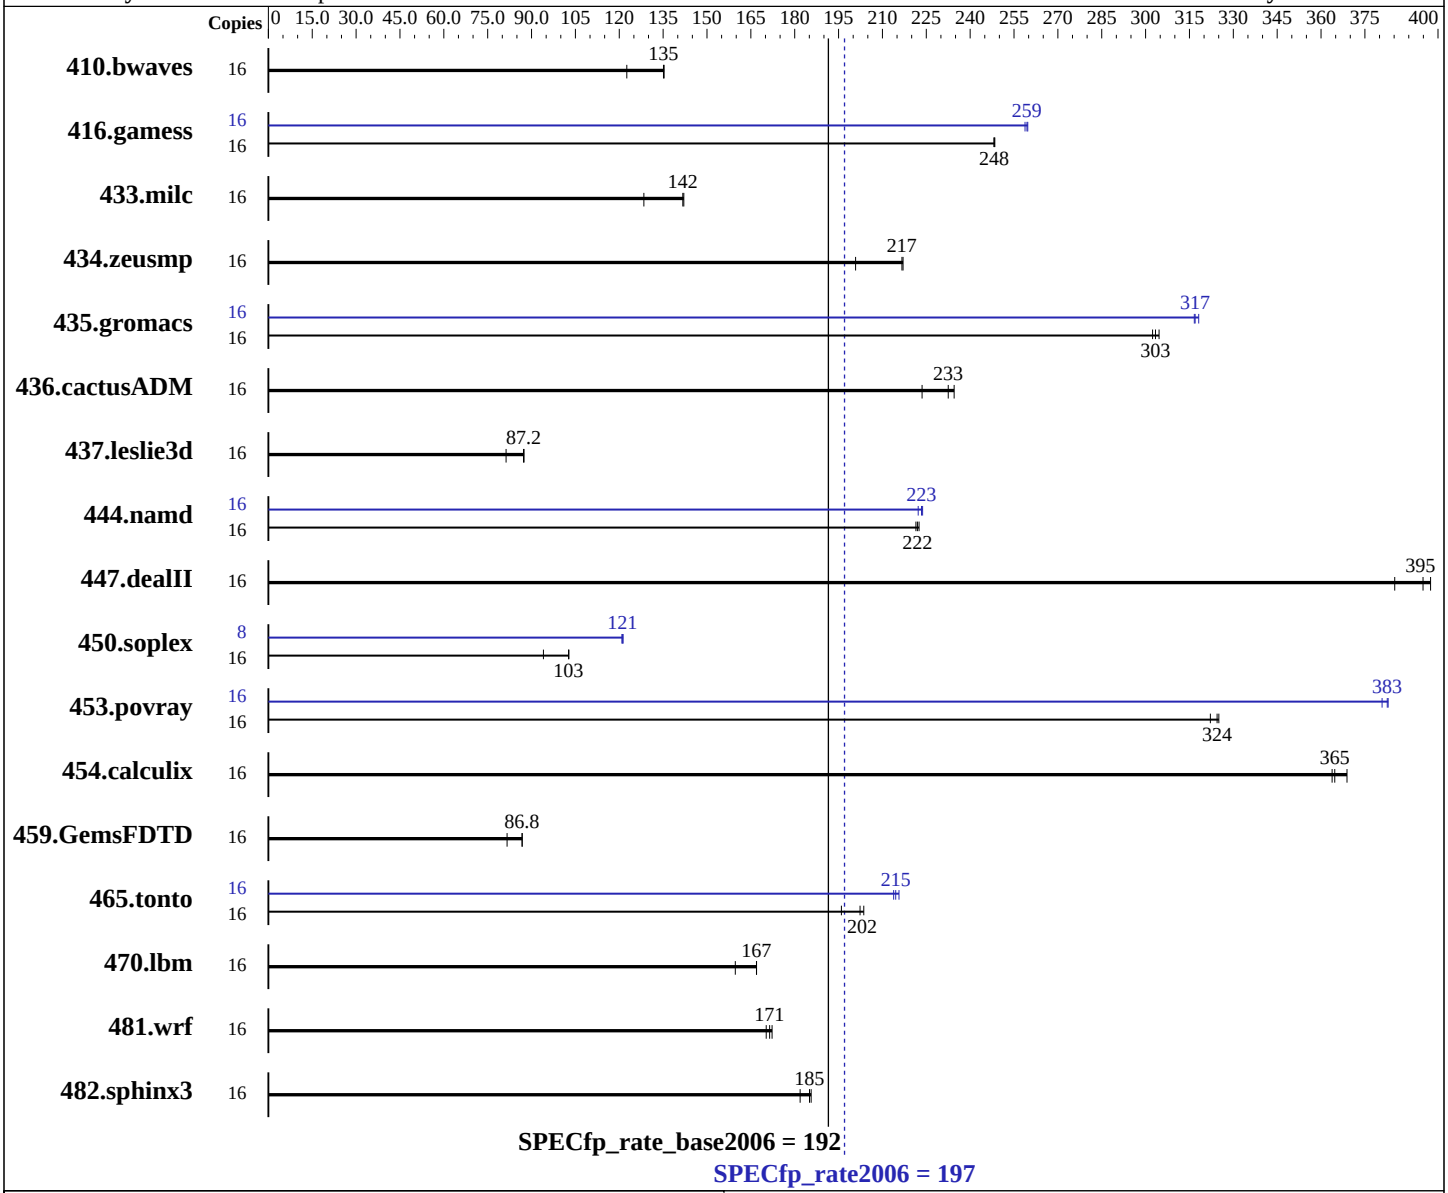

Hardware

CPU Name:	Intel Xeon D-1541
CPU Characteristics:	Intel Turbo Boost Technology up to 2.70 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	8 cores, 1 chip, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) Kernel 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation
DX20a-X (Intel Xeon D-1541)

SPECfp_rate2006 = 197

SPECfp_rate_base2006 = 192

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Mar-2016
Hardware Availability: Mar-2016
Software Availability: Nov-2015

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-T)
Disk Subsystem: 1 x 512 GB SATA, SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1774	123	1607	135	**1609**	**135**	16	1774	123	1607	135	**1609**	**135**
416.gamess	16	1261	248	**1262**	**248**	1263	248	16	**1208**	**259**	1206	260	1211	259
433.milc	16	1144	128	1034	142	**1036**	**142**	16	1144	128	1034	142	**1036**	**142**
434.zeusmp	16	725	201	**672**	**217**	671	217	16	725	201	**672**	**217**	671	217
435.gromacs	16	375	305	378	302	**377**	**303**	16	359	318	**360**	**317**	361	317
436.cactusADM	16	855	224	815	235	**822**	**233**	16	855	224	815	235	**822**	**233**
437.leslie3d	16	1850	81.3	1720	87.4	**1724**	**87.2**	16	1850	81.3	1720	87.4	**1724**	**87.2**
444.namd	16	**578**	**222**	579	221	577	223	16	577	222	**574**	**223**	574	224
447.dealII	16	475	385	461	397	**464**	**395**	16	475	385	461	397	**464**	**395**
450.soplex	16	1419	94.1	1298	103	**1300**	**103**	8	550	121	**551**	**121**	552	121
453.povray	16	**262**	**324**	264	322	262	325	16	222	383	223	381	**222**	**383**
454.calculix	16	358	369	363	364	**362**	**365**	16	358	369	363	364	**362**	**365**
459.GemsFDTD	16	2080	81.6	1955	86.8	**1957**	**86.8**	16	2080	81.6	1955	86.8	**1957**	**86.8**
465.tonto	16	803	196	**778**	**202**	773	204	16	736	214	730	216	**734**	**215**
470.lbm	16	1377	160	**1317**	**167**	1317	167	16	1377	160	**1317**	**167**	1317	167
481.wrf	16	**1043**	**171**	1050	170	1038	172	16	**1043**	**171**	1050	170	1038	172
482.sphinx3	16	**1685**	**185**	1715	182	1680	186	16	**1685**	**185**	1715	182	1680	186

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
 Power Management Policy: Custom
 Energy Performance: Performance
```

Continued on next page

Platform Notes (Continued)

```
Patrol Scrub: Disabled
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
       470.lbm: -DSPEC_CPU_LP64
       481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks (except as noted below):
```
icpc  -m64
```

450.soplex: `icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-D_FILE_OFFSET_BITS=64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`

Continued on next page

Peak Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-DX-RevA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-DX-RevA.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 13:13:43 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 April 2016.