



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M2, Intel Xeon E5-2603 v4, 1.70 GHz

SPECfp®2006 = 67.8
SPECfp_base2006 = 66.0

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

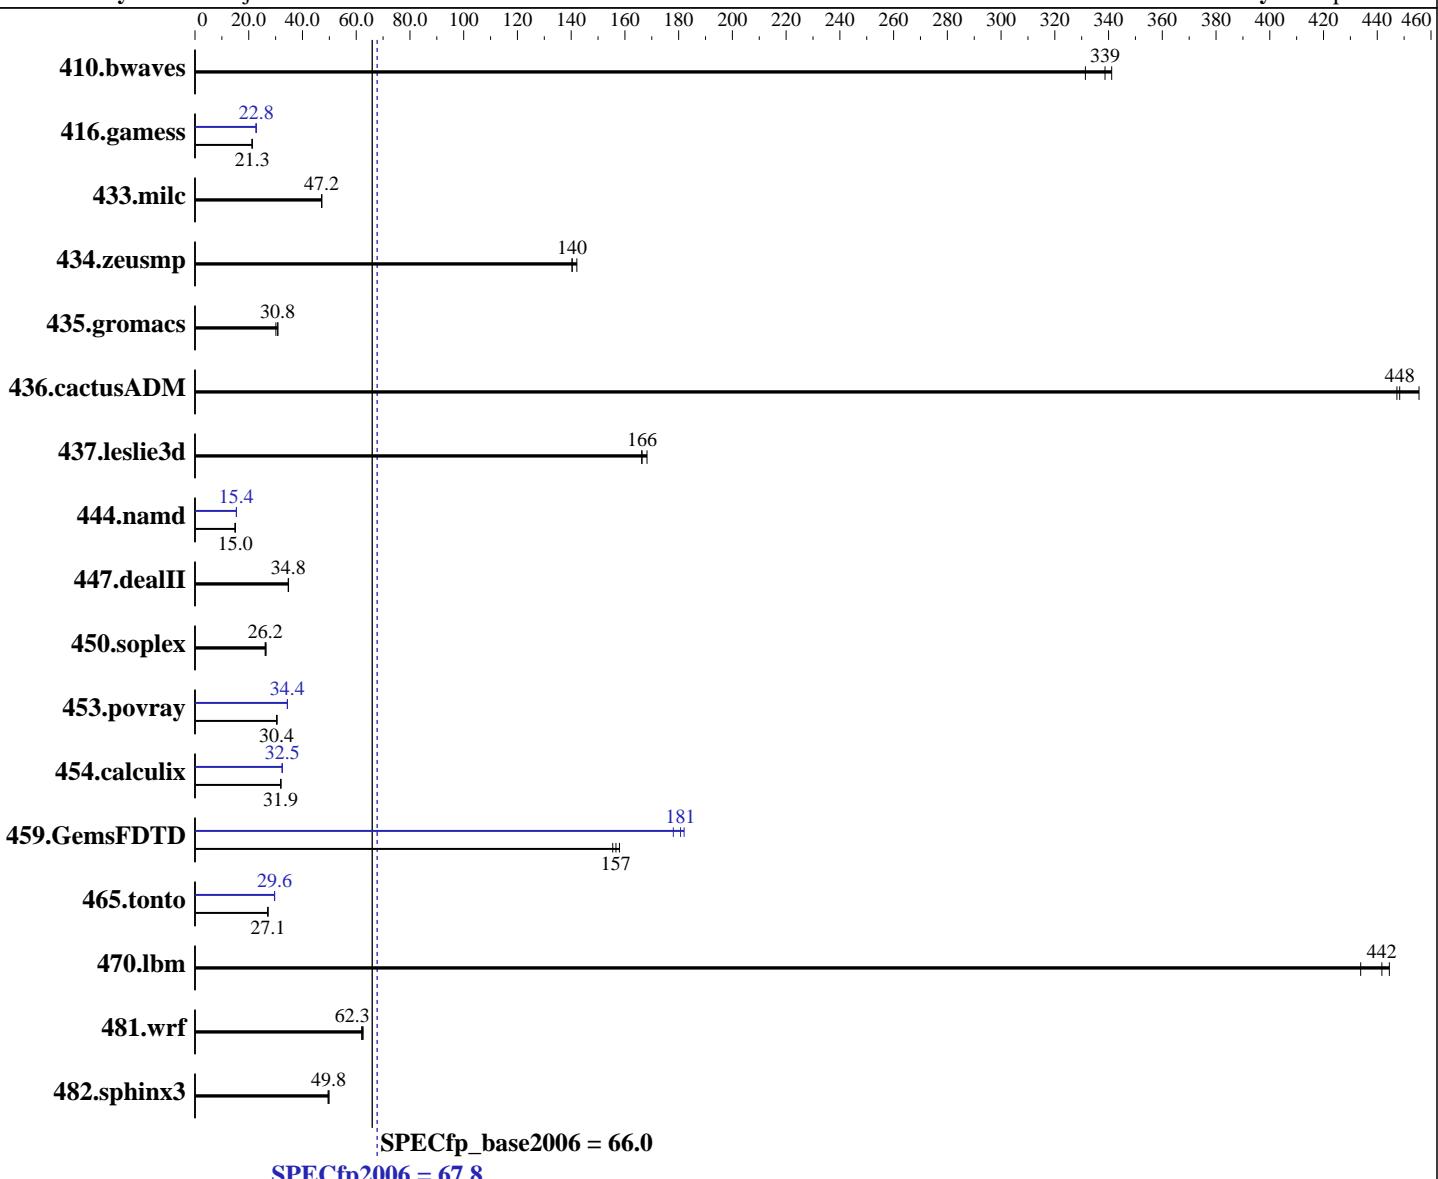

Hardware

CPU Name: Intel Xeon E5-2603 v4
CPU Characteristics:
CPU MHz: 1700
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
Compiler: Kernel 3.12.49-11-default
C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: xfs
System State: Run level 5 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M2, Intel Xeon E5-2603 v4, 1.70 GHz

SPECfp2006 = 67.8

SPECfp_base2006 = 66.0

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 1866 MHz)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	39.8	341	41.0	331	40.1	339	39.8	341	41.0	331	40.1	339
416.gamess	923	21.2	919	21.3	919	21.3	860	22.8	860	22.8	861	22.7
433.milc	195	47.2	195	47.2	195	47.1	195	47.2	195	47.2	195	47.1
434.zeusmp	64.8	140	64.9	140	64.0	142	64.8	140	64.9	140	64.0	142
435.gromacs	232	30.8	232	30.8	237	30.1	232	30.8	232	30.8	237	30.1
436.cactusADM	26.7	448	26.2	456	26.7	447	26.7	448	26.2	456	26.7	447
437.leslie3d	56.5	166	55.9	168	56.5	166	56.5	166	55.9	168	56.5	166
444.namd	536	15.0	536	15.0	536	15.0	520	15.4	520	15.4	520	15.4
447.dealII	330	34.7	329	34.8	329	34.8	330	34.7	329	34.8	329	34.8
450.soplex	319	26.2	315	26.5	319	26.1	319	26.2	315	26.5	319	26.1
453.povray	175	30.4	175	30.4	174	30.5	155	34.4	155	34.4	155	34.4
454.calculix	259	31.9	258	32.0	258	31.9	254	32.5	254	32.4	254	32.5
459.GemsFDTD	67.7	157	68.2	155	67.2	158	59.6	178	58.3	182	58.7	181
465.tonto	362	27.1	363	27.1	363	27.1	333	29.6	332	29.6	332	29.6
470.lbm	30.9	444	31.7	434	31.1	442	30.9	444	31.7	434	31.1	442
481.wrf	179	62.3	180	62.0	179	62.6	179	62.3	180	62.0	179	62.6
482.sphinx3	394	49.5	391	49.9	392	49.8	394	49.5	391	49.9	392	49.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Energy Performance = Performance

Utilization Profile = Unbalanced

QPI snoop mode: Home Snoop

COD Enable = Disabled, Early Snoop = Disabled, Home Snoop Dir OSB = Disabled

CPU C1E Support = Disabled

Sysinfo program /home/SPECcpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M2, Intel Xeon E5-2603 v4, 1.70 GHz

SPECfp2006 = 67.8

SPECfp_base2006 = 66.0

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

Platform Notes (Continued)

running on RX2540M2 Wed Apr 6 08:08:22 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2603 v4 @ 1.70GHz
        2 "physical id"s (chips)
        12 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 6
        siblings   : 6
        physical 0: cores 0 1 2 3 4 5
        physical 1: cores 0 1 2 3 4 5
    cache size : 15360 KB
```

```
From /proc/meminfo
    MemTotal:      264403120 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 1
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
    Linux RX2540M2 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
    (8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Apr 6 08:07
```

SPEC is set to: /home/SPECcpu2006
Filesystem Type Size Used Avail Use% Mounted on
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M2, Intel Xeon E5-2603 v4, 1.70 GHz

SPECfp2006 = 67.8

SPECfp_base2006 = 66.0

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

Platform Notes (Continued)

/dev/sda4 xfs 424G 78G 346G 19% /home
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.6.0 for D3289-B1x
03/11/2016

Memory:

16x Micron 36ASF2G72PZ-2G3A3 16 GB 2 rank 2400 MHz, configured at 1866 MHz
8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

OMP_NUM_THREADS = "12"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M2, Intel Xeon E5-2603 v4, 1.70 GHz

SPECfp2006 = 67.8

SPECfp_base2006 = 66.0

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

Base Portability Flags (Continued)

```
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M2, Intel Xeon E5-2603 v4, 1.70 GHz

SPECfp2006 = 67.8

SPECfp_base2006 = 66.0

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
            -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
                -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
                -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
                -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M2, Intel Xeon E5-2603 v4, 1.70 GHz

SPECfp2006 = 67.8

SPECfp_base2006 = 66.0

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

465.tonto (continued):

-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevA.html>
<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevA.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jun 1 19:09:30 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 June 2016.