



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL660c Gen9

(2.20 GHz, Intel Xeon E5-4669 v4)

SPECfp®2006 =

116

SPECfp_base2006 =

109

CPU2006 license: 3

Test sponsor: HPE


Tested by: HPE

Test date:

May-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

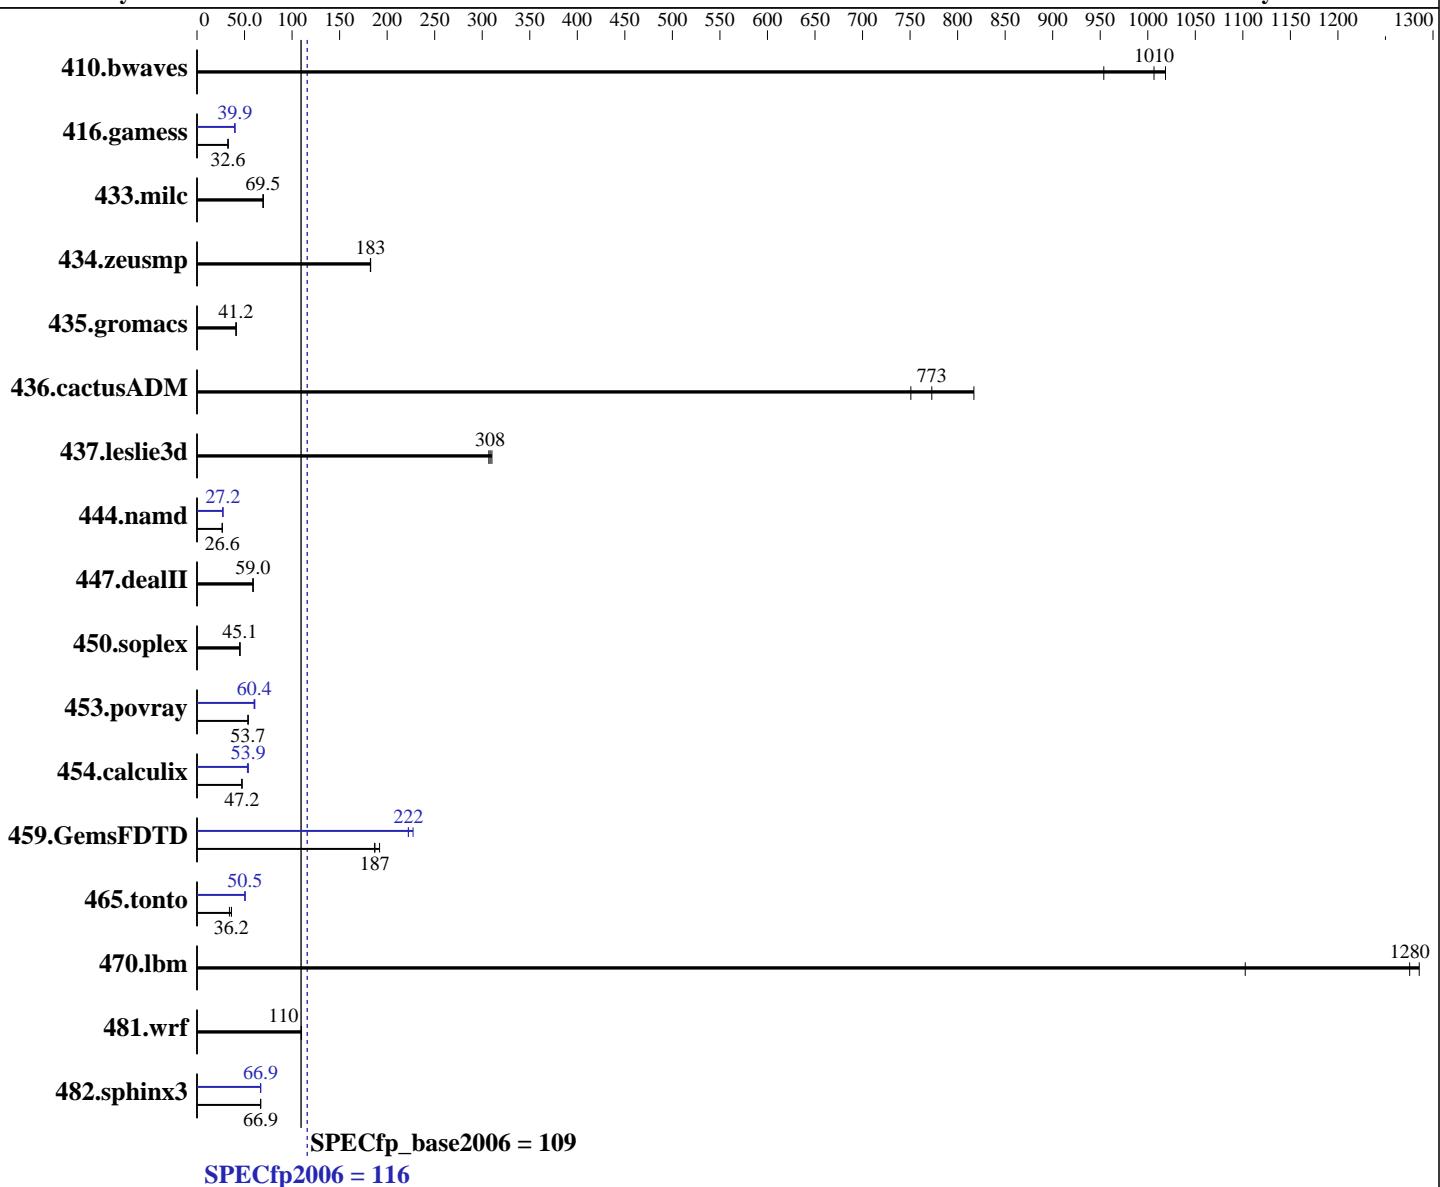

Hardware

CPU Name: Intel Xeon E5-4669 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 88 cores, 4 chips, 22 cores/chip
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.2, (Maipo)
 Compiler: Kernel 3.10.0-327.el7.x86_64
 Auto Parallel: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 File System: Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Yes
 xfs

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant BL660c Gen9
(2.20 GHz, Intel Xeon E5-4669 v4)

SPECfp2006 = 116

SPECfp_base2006 = 109

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

L3 Cache: 55 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	14.2	954	<u>13.5</u>	<u>1010</u>	13.3	1020	14.2	954	<u>13.5</u>	<u>1010</u>	13.3	1020
416.gamess	599	32.7	600	32.6	<u>600</u>	<u>32.6</u>	490	39.9	494	39.6	<u>491</u>	<u>39.9</u>
433.milc	<u>132</u>	<u>69.5</u>	132	69.5	132	69.8	<u>132</u>	<u>69.5</u>	132	69.5	132	69.8
434.zeusmp	<u>49.9</u>	<u>183</u>	49.8	183	49.9	182	<u>49.9</u>	<u>183</u>	49.8	183	49.9	182
435.gromacs	173	41.2	<u>173</u>	<u>41.2</u>	174	41.0	173	41.2	<u>173</u>	<u>41.2</u>	174	41.0
436.cactusADM	15.9	751	14.6	817	<u>15.5</u>	<u>773</u>	15.9	751	14.6	817	<u>15.5</u>	<u>773</u>
437.leslie3d	<u>30.5</u>	<u>308</u>	30.3	310	30.6	307	<u>30.5</u>	<u>308</u>	30.3	310	30.6	307
444.namd	301	26.6	301	26.6	<u>301</u>	<u>26.6</u>	295	27.2	295	27.2	<u>295</u>	<u>27.2</u>
447.dealII	194	58.8	<u>194</u>	<u>59.0</u>	194	59.1	194	58.8	<u>194</u>	<u>59.0</u>	194	59.1
450.soplex	184	45.3	<u>185</u>	<u>45.1</u>	185	45.0	184	45.3	<u>185</u>	<u>45.1</u>	185	45.0
453.povray	99.1	53.7	<u>99.0</u>	<u>53.7</u>	99.0	53.8	88.5	60.1	<u>88.1</u>	<u>60.4</u>	87.4	60.9
454.calculix	174	47.4	<u>175</u>	<u>47.2</u>	175	47.2	<u>153</u>	<u>53.9</u>	153	53.9	156	53.0
459.GemsFDTD	55.3	192	56.8	187	<u>56.7</u>	<u>187</u>	<u>47.7</u>	<u>222</u>	46.7	227	47.7	222
465.tonto	289	34.1	271	36.3	<u>272</u>	<u>36.2</u>	195	50.4	195	50.6	<u>195</u>	<u>50.5</u>
470.lbm	12.5	1100	<u>10.8</u>	<u>1280</u>	10.7	1290	12.5	1100	<u>10.8</u>	<u>1280</u>	10.7	1290
481.wrf	<u>102</u>	<u>110</u>	102	110	102	110	<u>102</u>	<u>110</u>	102	110	102	110
482.sphinx3	292	66.8	<u>291</u>	<u>66.9</u>	291	67.1	<u>292</u>	<u>66.9</u>	292	66.8	291	67.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

BIOS Configuration:

HP Power Profile set to Custom

HP Power Regulator to HP Static High Performance Mode

Minimum Processor Idle Power Core C-State set to C1E State

Minimum Processor Idle Power Package C-State set to No Package State

QPI Snoop Configuration set to Home Snoop

Collaborative Power Control set to Disabled

Thermal Configuration set to Maximum Cooling

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL660c Gen9

(2.20 GHz, Intel Xeon E5-4669 v4)

SPECfp2006 =

116

SPECfp_base2006 =

109

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

May-2016

Hardware Availability:

Jun-2016

Software Availability:

Dec-2015

Platform Notes (Continued)

```
Processor Power and Utilization Monitoring set to Disabled
Intel Hyperthreading Option set to Disabled
Sysinfo program /home/cpuv1.5/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date::: 2014-06-25 #$
e3fbb8667b5a285932ceab81e28219e1
running on BL660-Gen9-B Thu May 19 11:14:17 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4669 v4 @ 2.20GHz
        4 "physical id"s (chips)
        88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 22
        siblings : 22
        physical 0: cores 0 2 3 4 8 10 11 12 16 17 18 19 20 21 24 25 26 27 28
        physical 1: cores 0 2 3 4 8 10 11 12 16 17 18 19 20 21 24 25 26 27 28
        physical 2: cores 0 2 3 4 8 10 11 12 16 17 18 19 20 21 24 25 26 27 28
        physical 3: cores 0 2 3 4 8 10 11 12 16 17 18 19 20 21 24 25 26 27 28
        cache size : 56320 KB
```

```
From /proc/meminfo
MemTotal:      528057312 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.2 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.2"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux BL660-Gen9-B 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 19 11:01
```

```
SPEC is set to: /home/cpuv1.5/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL660c Gen9

(2.20 GHz, Intel Xeon E5-4669 v4)

SPECfp2006 =

116

SPECfp_base2006 =

109

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

May-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Platform Notes (Continued)

```
/dev/sda5      xfs   318G  171G  148G  54% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP I38 05/05/2016

Memory:

```
16x UNKNOWN NOT AVAILABLE
16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:
16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

OMP_NUM_THREADS = "88"

LD_LIBRARY_PATH = "/home/cpuv1.5/cpu2006/libs/32:/home/cpuv1.5/cpu2006/libs/64:/home/cpuv1.5/cpu2006/sh"

Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB memory using RedHat EL 7.2

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL660c Gen9

(2.20 GHz, Intel Xeon E5-4669 v4)

SPECfp2006 =

116

SPECfp_base2006 =

109

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

May-2016

Hardware Availability:

Jun-2016

Software Availability:

Dec-2015

Base Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-fp-model fast=2
-qopt-prefetch-issue-excl-hint

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint
-fp-model fast=2

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL660c Gen9

(2.20 GHz, Intel Xeon E5-4669 v4)

SPECfp2006 =

116

SPECfp_base2006 =

109

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

May-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel
 -opt-prefetch -ansi-alias
 -fp-model fast=2
 -qopt-prefetch-issue-excl-hint -funroll-all-loops

-nofor-main

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep-

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL660c Gen9

(2.20 GHz, Intel Xeon E5-4669 v4)

SPECfp2006 =

116

SPECfp_base2006 =

109

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

May-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revF.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revF.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 21 18:04:34 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 June 2016.