SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

HPC S2600WT2R (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp®_rate2006 = 682

SPECfp_rate_base2006 = 668

CPU2006 license: 4204
Test sponsor: M Computers s.r.o.
Tested by: M Computers s.r.o.

Test date: Jun-2016
Hardware Availability: Mar-2016
Software Availability: Feb-2016

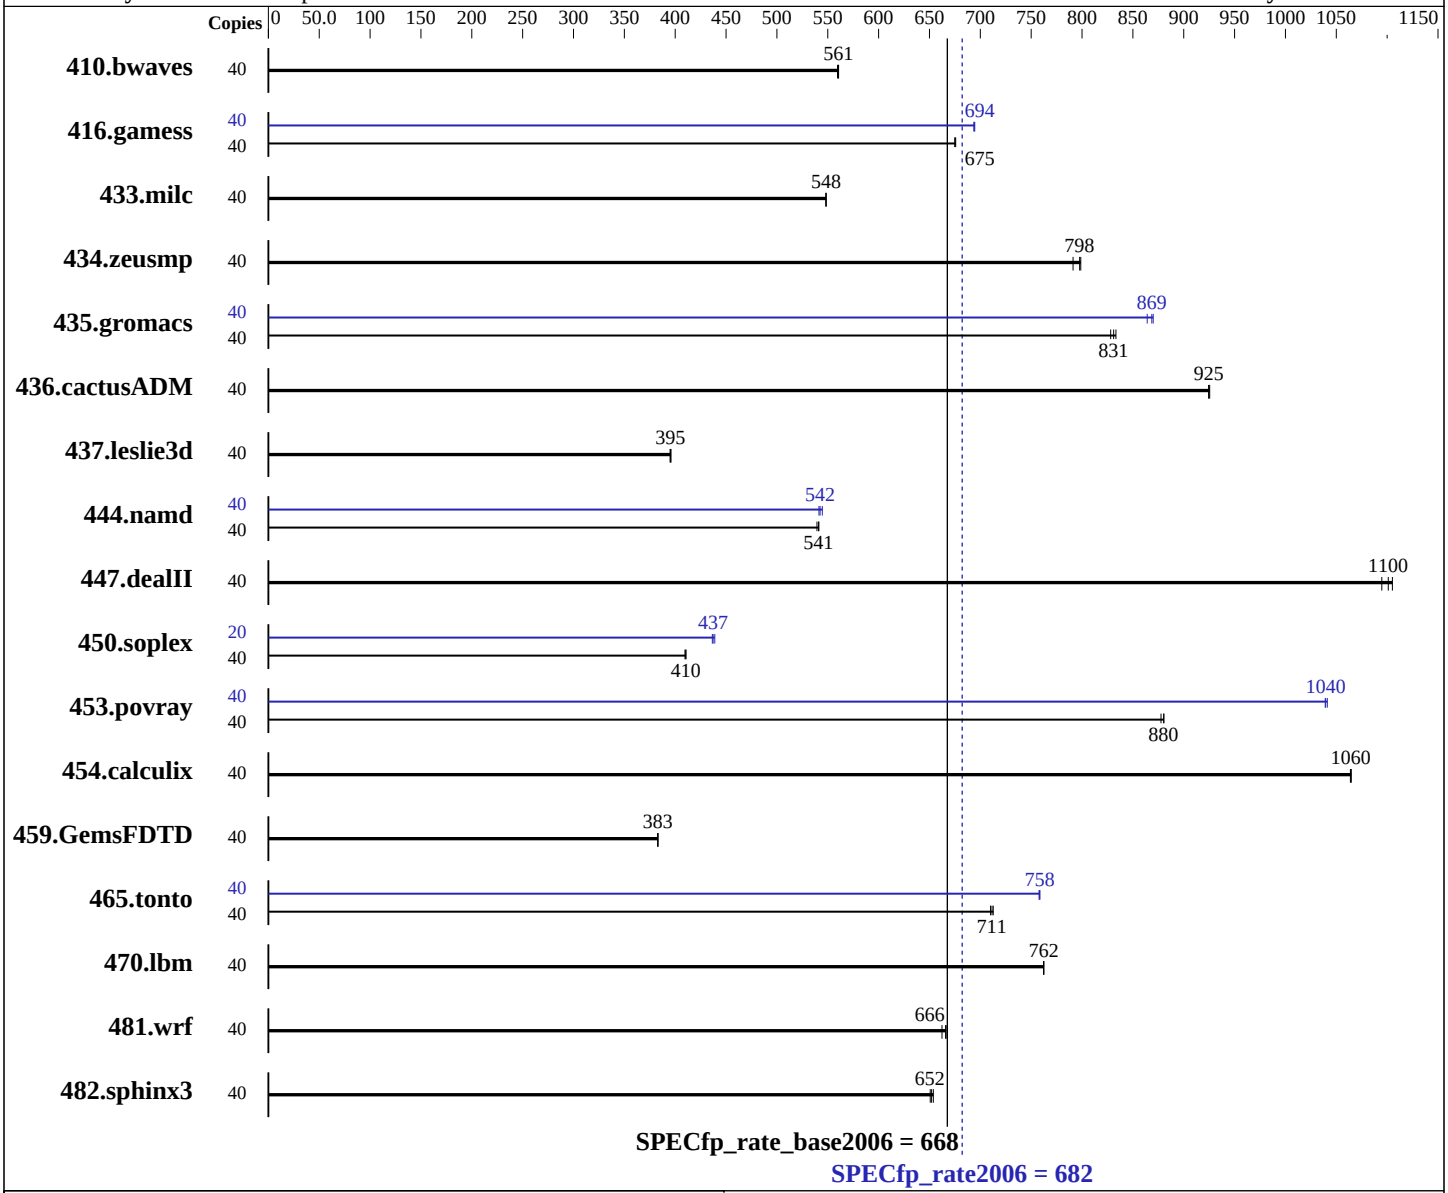

Hardware

CPU Name:	Intel Xeon E5-2630 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.10 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	CentOS Linux release 7.2.1511 (Core) 3.10.0-327.18.2.el7.x86_64
Compiler:	C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

HPC S2600WT2R (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp_rate2006 = 682

SPECfp_rate_base2006 = 668

CPU2006 license: 4204
Test sponsor: M Computers s.r.o.
Tested by: M Computers s.r.o.

Test date: Jun-2016
Hardware Availability: Mar-2016
Software Availability: Feb-2016

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 100 GB SATA SSD
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	971	560	**970**	**561**	970	561	40	971	560	**970**	**561**	970	561
416.gamess	40	1159	676	1160	675	**1160**	**675**	40	1128	695	1129	694	**1129**	**694**
433.milc	40	670	548	**670**	**548**	670	548	40	670	548	**670**	**548**	670	548
434.zeusmp	40	456	799	**456**	**798**	460	791	40	456	799	**456**	**798**	460	791
435.gromacs	40	**344**	**831**	345	828	343	833	40	328	870	331	864	**329**	**869**
436.cactusADM	40	517	924	**517**	**925**	516	926	40	517	924	**517**	**925**	516	926
437.leslie3d	40	**951**	**395**	952	395	950	396	40	**951**	**395**	952	395	950	396
444.namd	40	**593**	**541**	593	541	595	539	40	**591**	**542**	593	541	589	545
447.dealII	40	**416**	**1100**	414	1110	418	1090	40	**416**	**1100**	414	1110	418	1090
450.soplex	40	813	411	814	410	**813**	**410**	20	**381**	**437**	382	437	380	439
453.povray	40	242	881	242	878	**242**	**880**	40	205	1040	**205**	**1040**	204	1040
454.calculix	40	310	1060	310	1060	**310**	**1060**	40	310	1060	310	1060	**310**	**1060**
459.GemsFDTD	40	1108	383	**1108**	**383**	1108	383	40	1108	383	**1108**	**383**	1108	383
465.tonto	40	554	710	**553**	**711**	552	713	40	519	759	**519**	**758**	519	758
470.lbm	40	**721**	**762**	721	762	721	762	40	**721**	**762**	721	762	721	762
481.wrf	40	671	666	**671**	**666**	675	662	40	671	666	**671**	**666**	675	662
482.sphinx3	40	1198	651	1192	654	**1196**	**652**	40	1198	651	1192	654	**1196**	**652**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
```

Platform Notes

```
BIOS Configuration:
 CPU and Power Performance Policy = Performance
 Set Fan Profile = Performance
 Fan PWM Offset = 100
Sysinfo program /spec/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (e8f6083e070337c86105af7c45f99758)
running on ruth Sat Jun 11 16:15:45 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2630 v4 @ 2.20GHz
      2 "physical id"s (chips)
      40 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 0 1 2 3 4 8 9 10 11 12
      physical 1: cores 0 1 2 3 4 8 9 10 11 12
   cache size : 25600 KB

From /proc/meminfo
   MemTotal:       263857524 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   centos-release: CentOS Linux release 7.2.1511 (Core)
   centos-release-upstream: Derived from Red Hat Enterprise Linux 7.2 (Source)
   os-release:
      NAME="CentOS Linux"
      VERSION="7 (Core)"
      ID="centos"
      ID_LIKE="rhel fedora"
      VERSION_ID="7"
      PRETTY_NAME="CentOS Linux 7 (Core)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:centos:centos:7"
   redhat-release: CentOS Linux release 7.2.1511 (Core)
   system-release: CentOS Linux release 7.2.1511 (Core)
   system-release-cpe: cpe:/o:centos:centos:7

uname -a:
   Linux ruth 3.10.0-327.18.2.el7.x86_64 #1 SMP Thu May 12 11:03:55 UTC 2016
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 11 16:14
```

Continued on next page

Platform Notes (Continued)

```
SPEC is set to: /spec
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda1      xfs   100G  9.1G   91G  10% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS  SE5C610.86B.01.01.0016.033120161139 03/31/2016
  Memory:
   16x Kinston 9965662-004.A00G 16 GB 2 rank 2400 MHz, configured at 2134 MHz
   8x NO DIMM NO DIMM

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:$/opt/intel/compilers_and_libraries_2016.2.181/linux/compiler/lib/intel64_lin"

 Binaries compiled on a system with 2x Xeon E5-2630 v4 CPU + 256GB
 memory using CentOS 7.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/MComputers-Platform-Settings-V1.2-revA.html
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/MComputers-Platform-Settings-V1.2-revA.xml
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 28 17:29:37 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 June 2016.