



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp<sup>®</sup>\_rate2006 = 1280**

PowerEdge FC830 (Intel Xeon E5-4655 v4, 2.50 GHz)

**SPECfp\_rate\_base2006 = 1250**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

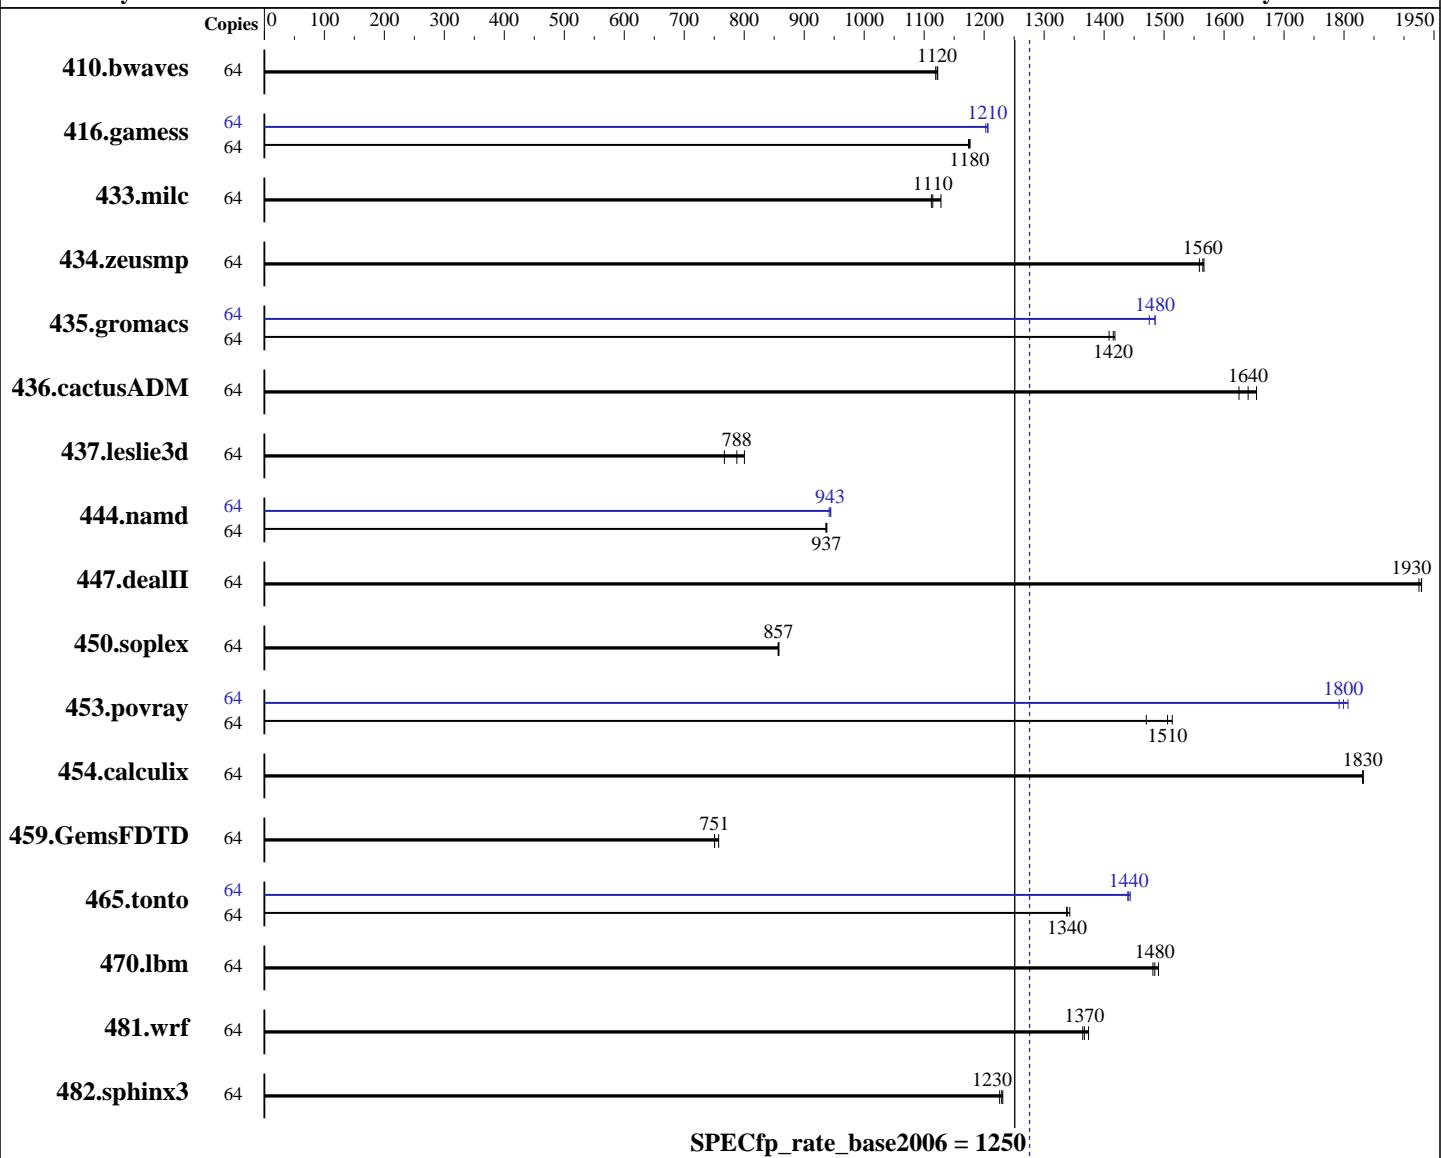

**SPECfp\_rate\_base2006 = 1250**

**SPECfp\_rate2006 = 1280**

## Hardware

CPU Name: Intel Xeon E5-4655 v4  
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
CPU MHz: 2500  
FPU: Integrated  
CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default  
Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: btrfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1280**

PowerEdge FC830 (Intel Xeon E5-4655 v4, 2.50 GHz)

**SPECfp\_rate\_base2006 = 1250**

**CPU2006 license:** 55

**Test date:** Apr-2016

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jun-2016

**Tested by:** Dell Inc.

**Software Availability:** Mar-2016

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx8 PC4-2400T-R)  
 Disk Subsystem: 1 x 800 GB SATA SSD  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	777	1120	775	1120	<b>775</b>	<b>1120</b>	64	777	1120	775	1120	<b>775</b>	<b>1120</b>
416.gamess	64	1067	1170	1065	1180	<b>1066</b>	<b>1180</b>	64	1039	1210	<b>1039</b>	<b>1210</b>	1042	1200
433.milc	64	521	1130	<b>527</b>	<b>1110</b>	528	1110	64	521	1130	<b>527</b>	<b>1110</b>	528	1110
434.zeusmp	64	<b>372</b>	<b>1560</b>	372	1570	374	1560	64	<b>372</b>	<b>1560</b>	372	1570	374	1560
435.gromacs	64	322	1420	324	1410	<b>323</b>	<b>1420</b>	64	<b>308</b>	<b>1480</b>	308	1480	310	1480
436.cactusADM	64	471	1620	<b>466</b>	<b>1640</b>	462	1650	64	471	1620	<b>466</b>	<b>1640</b>	462	1650
437.leslie3d	64	784	767	752	800	<b>764</b>	<b>788</b>	64	784	767	752	800	<b>764</b>	<b>788</b>
444.namd	64	547	938	548	936	<b>548</b>	<b>937</b>	64	<b>544</b>	<b>943</b>	544	944	545	942
447.dealII	64	379	1930	<b>380</b>	<b>1930</b>	380	1920	64	379	1930	<b>380</b>	<b>1930</b>	380	1920
450.soplex	64	<b>623</b>	<b>857</b>	622	858	623	856	64	<b>623</b>	<b>857</b>	622	858	623	856
453.povray	64	232	1470	<b>226</b>	<b>1510</b>	225	1510	64	<b>189</b>	<b>1800</b>	188	1810	190	1790
454.calculix	64	288	1830	<b>288</b>	<b>1830</b>	288	1830	64	288	1830	<b>288</b>	<b>1830</b>	288	1830
459.GemsFDTD	64	<b>905</b>	<b>751</b>	897	757	905	751	64	<b>905</b>	<b>751</b>	897	757	905	751
465.tonto	64	471	1340	<b>470</b>	<b>1340</b>	469	1340	64	<b>437</b>	<b>1440</b>	436	1440	438	1440
470.lbm	64	590	1490	594	1480	<b>592</b>	<b>1480</b>	64	590	1490	594	1480	<b>592</b>	<b>1480</b>
481.wrf	64	524	1360	<b>523</b>	<b>1370</b>	520	1370	64	524	1360	<b>523</b>	<b>1370</b>	520	1370
482.sphinx3	64	1018	1230	1013	1230	<b>1015</b>	<b>1230</b>	64	1018	1230	1013	1230	<b>1015</b>	<b>1230</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Snoop Mode set to Home Snoop

Virtualization Technology disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1280**

PowerEdge FC830 (Intel Xeon E5-4655 v4, 2.50 GHz)

**SPECfp\_rate\_base2006 = 1250**

**CPU2006 license:** 55

**Test date:** Apr-2016

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jun-2016

**Tested by:** Dell Inc.

**Software Availability:** Mar-2016

## Platform Notes (Continued)

System Profile set to custom  
CPU Performance set to Hardware P States  
C States set to Autonomous  
C1E disabled  
Energy Efficient Turbo disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Balanced Performance  
Memory Patrol Scrub disabled  
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1  
running on linux-4pvpv Wed Apr 20 02:00:52 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-4655 v4 @ 2.50GHz  
 4 "physical id"s (chips)  
 64 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 8  
 siblings : 16  
 physical 0: cores 0 1 3 5 8 10 12 13  
 physical 1: cores 0 1 3 5 8 10 12 13  
 physical 2: cores 0 1 3 5 8 10 12 13  
 physical 3: cores 0 1 3 5 8 10 12 13  
cache size : 30720 KB

From /proc/meminfo  
MemTotal: 529326748 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
SUSE Linux Enterprise Server 12 SP1

From /etc/\*release\* /etc/\*version\*  
SuSE-release:  
 SUSE Linux Enterprise Server 12 (x86\_64)  
VERSION = 12  
PATCHLEVEL = 1  
# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.  
os-release:  
 NAME="SLES"  
 VERSION="12-SP1"  
 VERSION\_ID="12.1"  
 PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP1"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1280**

PowerEdge FC830 (Intel Xeon E5-4655 v4, 2.50 GHz)

**SPECfp\_rate\_base2006 = 1250**

CPU2006 license: 55

Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Platform Notes (Continued)

```
ID="sles"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:  
Linux linux-4ppv 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015  
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 19 15:05
```

```
SPEC is set to: /root/cpu2006-1.2  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
/dev/sda2        xfs   271G   12G  260G   5% /  
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 2.0.2 04/14/2016  
Memory:  
5x 002C00B3002C 18ASF2G72PDZ-2G3A1 16 GB 2 rank 2400 MHz  
19x 00AD00B300AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz  
8x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz  
16x Not Specified Not Specified
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1280**

PowerEdge FC830 (Intel Xeon E5-4655 v4, 2.50 GHz)

**SPECfp\_rate\_base2006 = 1250**

CPU2006 license: 55

Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

fort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1280**

PowerEdge FC830 (Intel Xeon E5-4655 v4, 2.50 GHz)

**SPECfp\_rate\_base2006 = 1250**

**CPU2006 license:** 55

**Test date:** Apr-2016

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jun-2016

**Tested by:** Dell Inc.

**Software Availability:** Mar-2016

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1280**

PowerEdge FC830 (Intel Xeon E5-4655 v4, 2.50 GHz)

**SPECfp\_rate\_base2006 = 1250**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Apr-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Mar-2016

## Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 28 17:29:52 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 June 2016.