SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant XL450 Gen9
(3.40 GHz, Intel Xeon E5-2643 v4)

SPECfp®_rate2006 = 614

SPECfp_rate_base2006 = 597

CPU2006 license: 3		**Test date:**	Jun-2016
Test sponsor:	HPE	**Hardware Availability:**	Mar-2016
Tested by:	HPE	**Software Availability:**	Dec-2015

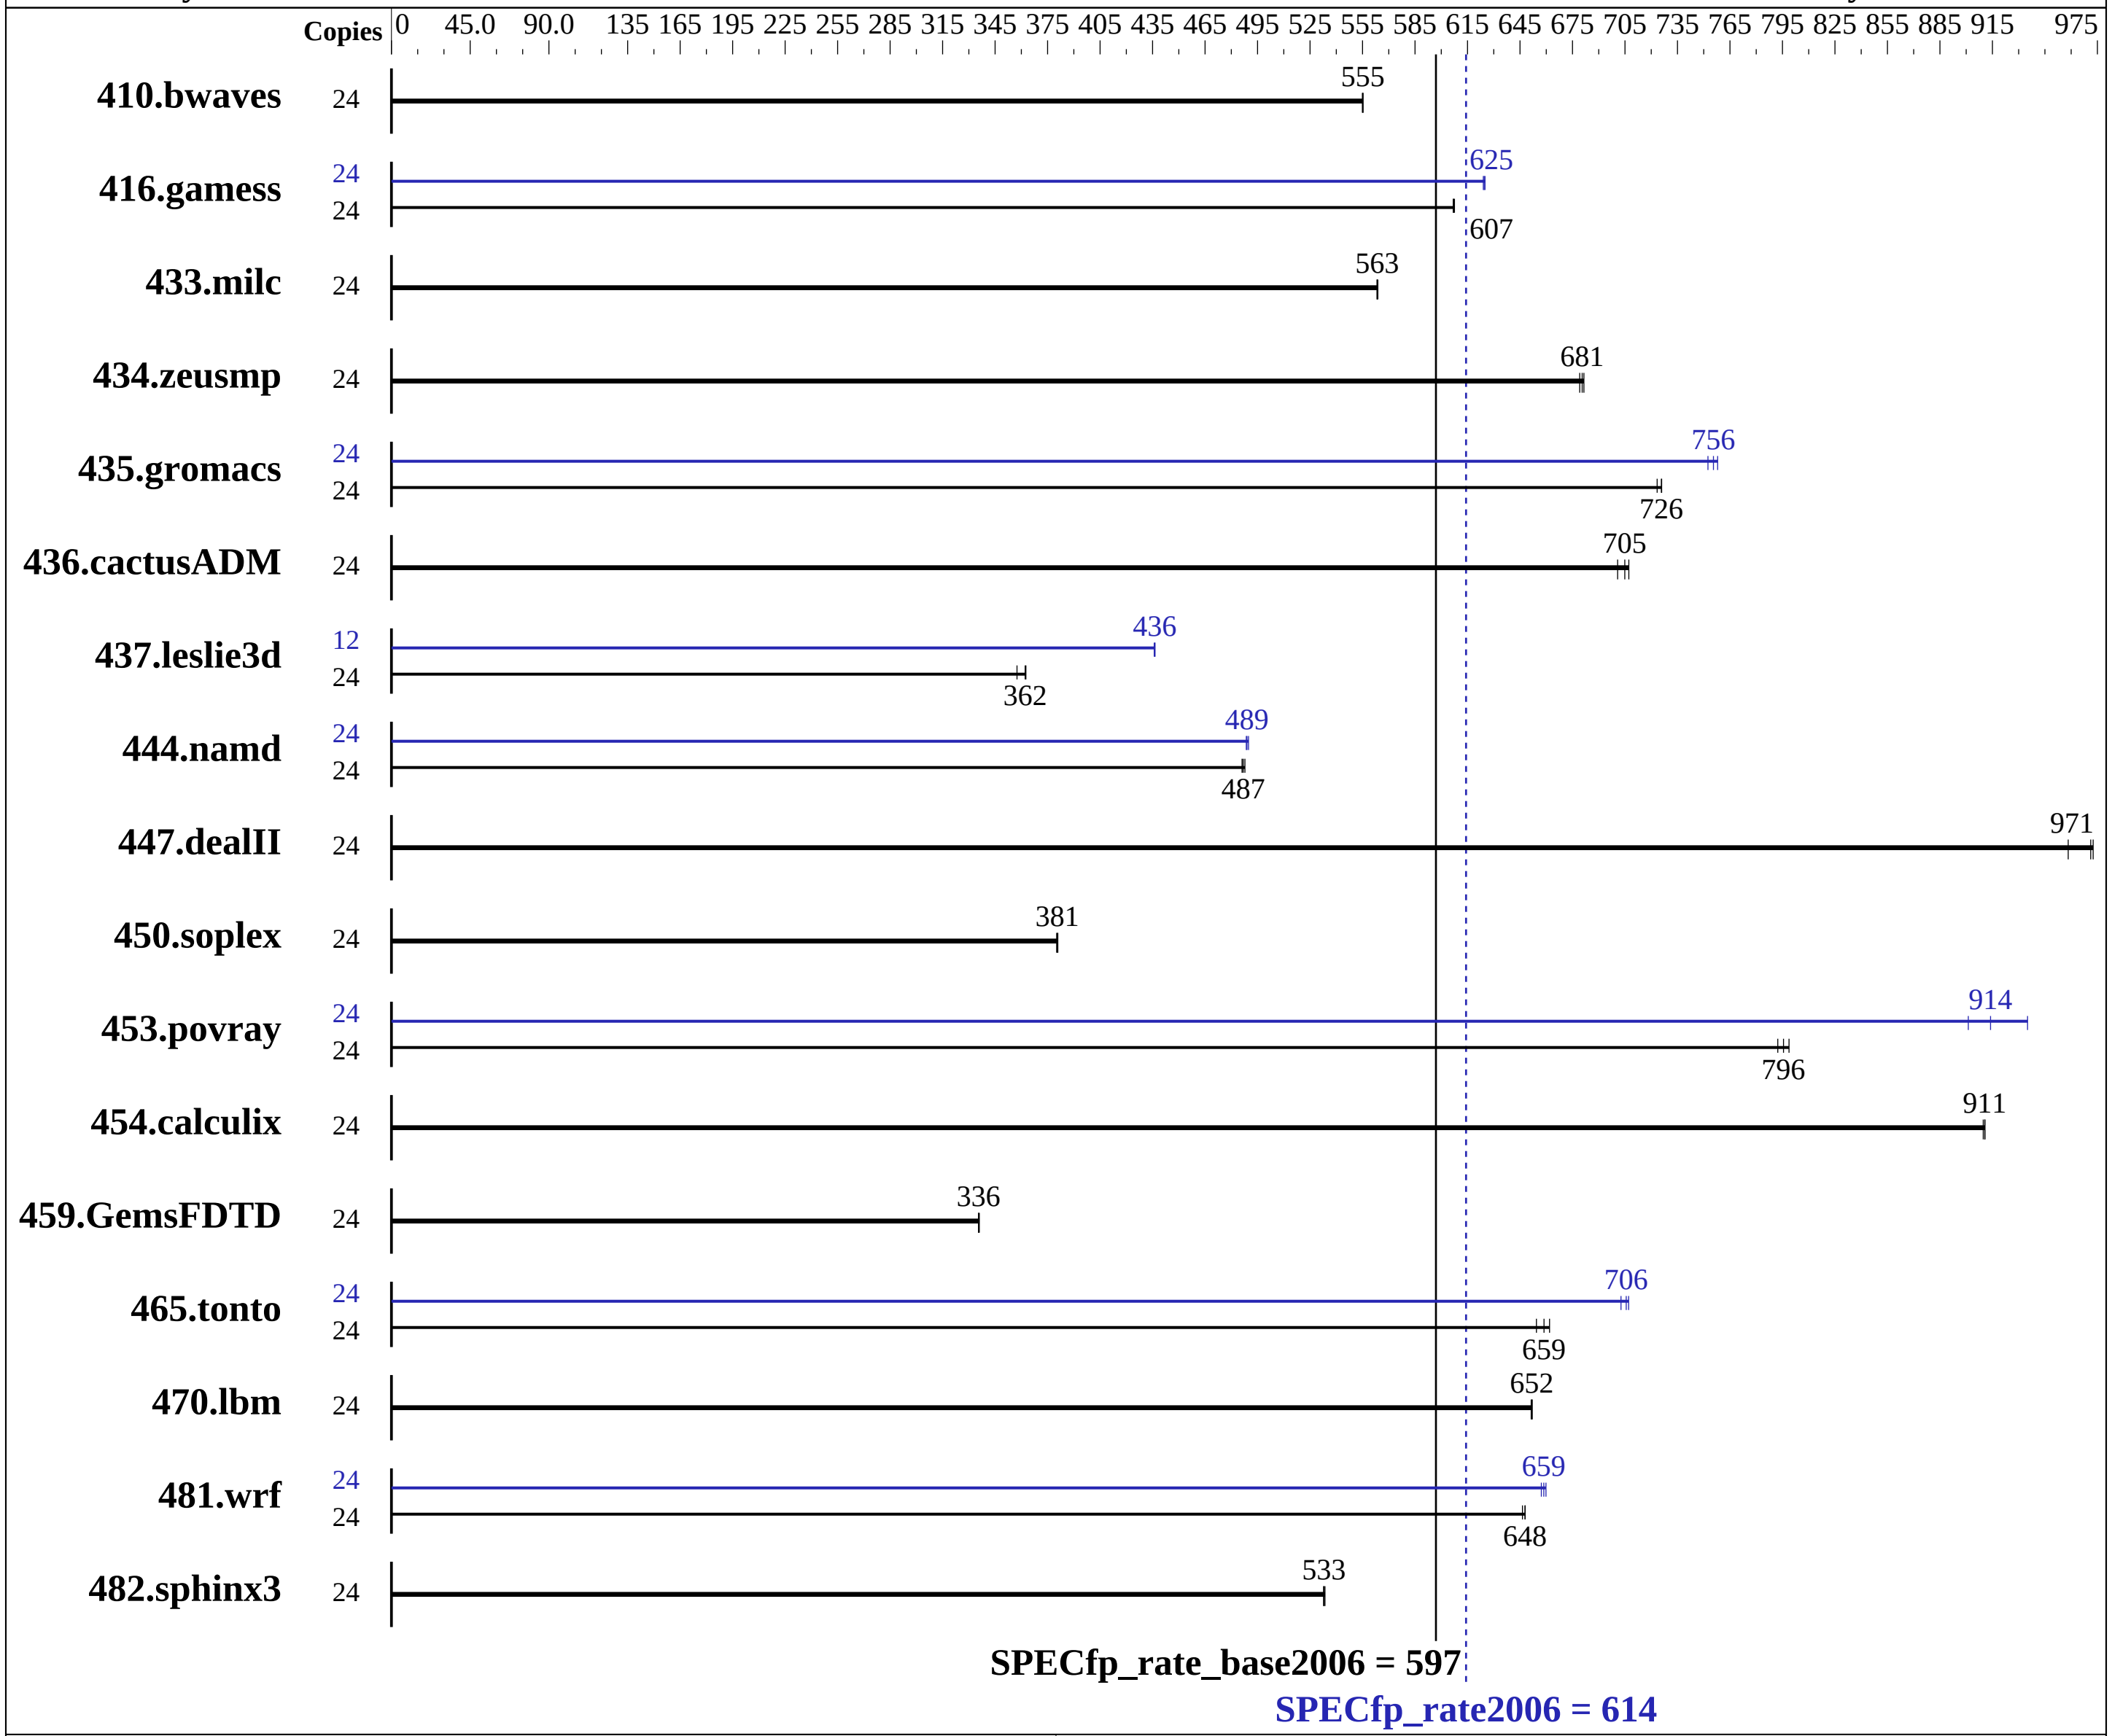

Hardware

CPU Name:	Intel Xeon E5-2643 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP1 Kernel 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	btrfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant XL450 Gen9
(3.40 GHz, Intel Xeon E5-2643 v4)

SPECfp_rate2006 = 614

SPECfp_rate_base2006 = 597

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Jun-2016
Hardware Availability: Mar-2016
Software Availability: Dec-2015

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 2 x 400 GB SAS SSD, RAID 1
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	588	555	587	555	**587**	**555**	24	588	555	587	555	**587**	**555**
416.gamess	24	774	607	**774**	**607**	773	608	24	752	625	**752**	**625**	753	624
433.milc	24	391	563	391	564	**391**	**563**	24	391	563	391	564	**391**	**563**
434.zeusmp	24	320	682	**321**	**681**	322	679	24	320	682	**321**	**681**	322	679
435.gromacs	24	**236**	**726**	237	723	236	726	24	228	752	226	758	**227**	**756**
436.cactusADM	24	409	701	**407**	**705**	406	707	24	409	701	**407**	**705**	406	707
437.leslie3d	24	**623**	**362**	622	363	631	358	12	**259**	**436**	258	436	259	436
444.namd	24	395	488	**395**	**487**	396	486	24	**394**	**489**	393	490	394	489
447.dealII	24	287	958	282	973	**283**	**971**	24	287	958	282	973	**283**	**971**
450.soplex	24	527	380	**526**	**381**	526	381	24	527	380	**526**	**381**	526	381
453.povray	24	160	799	161	792	**160**	**796**	24	**140**	**914**	137	935	142	901
454.calculix	24	217	911	**217**	**911**	218	910	24	217	911	**217**	**911**	218	910
459.GemsFDTD	24	759	336	758	336	**759**	**336**	24	759	336	758	336	**759**	**336**
465.tonto	24	361	654	**359**	**659**	357	662	24	336	703	334	707	**335**	**706**
470.lbm	24	506	651	**506**	**652**	506	652	24	506	651	**506**	**652**	506	652
481.wrf	24	**414**	**648**	414	648	415	646	24	408	657	406	660	**407**	**659**
482.sphinx3	24	878	533	**878**	**533**	877	534	24	878	533	**878**	**533**	877	534

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1 >      /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant XL450 Gen9
(3.40 GHz, Intel Xeon E5-2643 v4)

SPECfp_rate2006 = 614
SPECfp_rate_base2006 = 597

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE
Test date: Jun-2016
Hardware Availability: Mar-2016
Software Availability: Dec-2015

Platform Notes

```
BIOS Configuration:
   Power Profile set to Maximum Performance
   QPI Snoop Configuration set to Cluster on Die
   Collaborative Power Control set to Disabled
   Thermal Configuration set to Maximum Cooling
   Processor Power and Utilization Monitoring set to Disabled
   Memory Double Refresh Rate set to 1x Refresh
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on XL450-G9-node2 Mon Jun 13 21:58:42 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2643 v4 @ 3.40GHz
      2 "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 12
      physical 0: cores 0 1 2 3 6 7
      physical 1: cores 0 1 2 3 6 7
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       264220044 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 1
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP1"
      VERSION_ID="12.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

Continued on next page

Copyright 2006-2016 Standard Performance Evaluation Corporation

Platform Notes (Continued)

```
uname -a:
   Linux XL450-G9-node2 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
   (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 13 15:41

SPEC is set to: /home/cpu2006
   Filesystem     Type   Size  Used Avail Use% Mounted on
   /dev/sda3      btrfs  243G   15G  228G   7% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS HP U21 03/10/2016
  Memory:
   8x UNKNOWN NOT AVAILABLE
   8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

(End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of
memory is 256 GB and the dmidecode description should have one line reading as:
8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

 Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB
 memory using RedHat EL 7.2
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32
-ansi-alias -opt-mem-layout-trans=3 -qopt-prefetch-issue-excl-hint

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-fp-model fast=2 -auto-ilp32 -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-qopt-prefetch-issue-excl-hint

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32
-ansi-alias -opt-mem-layout-trans=3 -qopt-prefetch-issue-excl-hint

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -static(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -static(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)
-unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

437.leslie3d: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -static(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 12 11:03:50 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 July 2016.