# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R730 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECfp®_rate2006 = 1110

SPECfp_rate_base2006 = 1070

**CPU2006 license:** 55
**Test sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test date:** Aug-2016
**Hardware Availability:** Jun-2016
**Software Availability:** Nov-2015

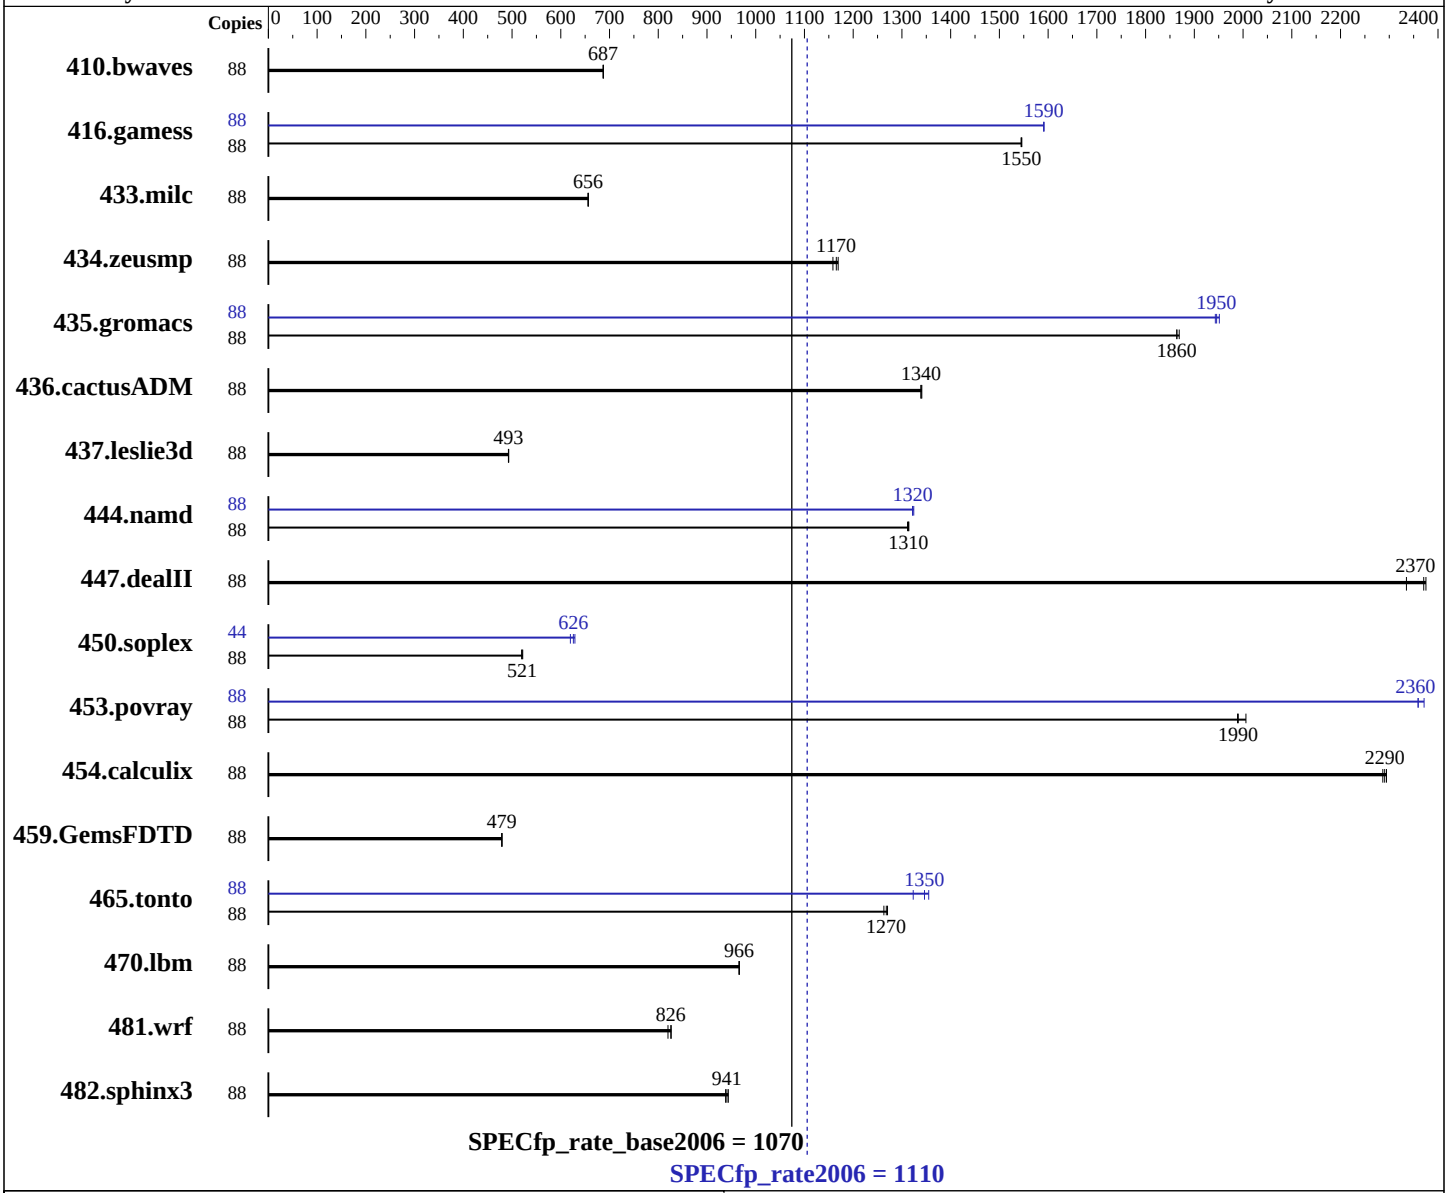


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E5-2699 v4 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.60 GHz |
| CPU MHz: | 2200 |
| FPU: | Integrated |
| CPU(s) enabled: | 44 cores, 2 chips, 22 cores/chip, 2 threads/core |
| CPU(s) orderable: | 1,2 chip |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |

Continued on next page

## Software

| | |
|---|---|
| Operating System: | Red Hat Enterprise Linux Server release 7.2 (Maipo)<br>3.10.0-327.el7.x86_64 |
| Compiler: | C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;<br>Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux |
| Auto Parallel: | No |
| File System: | xfs |

Continued on next page

# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R730 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECfp_rate2006 = 1110

SPECfp_rate_base2006 = 1070

**CPU2006 license:** 55
**Test sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test date:** Aug-2016
**Hardware Availability:** Jun-2016
**Software Availability:** Nov-2015

| | |
|---|---|
| L3 Cache: | 55 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R) |
| Disk Subsystem: | 200 GB SATA SSD |
| Other Hardware: | None |

| | |
|---|---|
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 32/64-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | None |

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 88 | **1740** | **687** | 1740 | 687 | 1741 | 687 | 88 | **1740** | **687** | 1740 | 687 | 1741 | 687 |
| 416.gamess | 88 | 1116 | 1540 | **1115** | **1550** | 1115 | 1550 | 88 | 1083 | 1590 | **1083** | **1590** | 1083 | 1590 |
| 433.milc | 88 | 1231 | 656 | 1231 | 656 | **1231** | **656** | 88 | 1231 | 656 | 1231 | 656 | **1231** | **656** |
| 434.zeusmp | 88 | **687** | **1170** | 691 | 1160 | 685 | 1170 | 88 | **687** | **1170** | 691 | 1160 | 685 | 1170 |
| 435.gromacs | 88 | 336 | 1870 | 337 | 1860 | **337** | **1860** | 88 | 322 | 1950 | 323 | 1940 | **323** | **1950** |
| 436.cactusADM | 88 | 785 | 1340 | **785** | **1340** | 784 | 1340 | 88 | 785 | 1340 | **785** | **1340** | 784 | 1340 |
| 437.leslie3d | 88 | **1678** | **493** | 1679 | 493 | 1678 | 493 | 88 | **1678** | **493** | 1679 | 493 | 1678 | 493 |
| 444.namd | 88 | 537 | 1310 | **537** | **1310** | 538 | 1310 | 88 | 533 | 1320 | 534 | 1320 | **534** | **1320** |
| 447.dealII | 88 | 424 | 2380 | 431 | 2340 | **425** | **2370** | 88 | 424 | 2380 | 431 | 2340 | **425** | **2370** |
| 450.soplex | 88 | 1406 | 522 | **1410** | **521** | 1412 | 520 | 44 | **586** | **626** | 592 | 620 | 583 | 629 |
| 453.povray | 88 | **235** | **1990** | 235 | 1990 | 233 | 2010 | 88 | 197 | 2370 | **198** | **2360** | 198 | 2360 |
| 454.calculix | 88 | **317** | **2290** | 316 | 2290 | 317 | 2290 | 88 | **317** | **2290** | 316 | 2290 | 317 | 2290 |
| 459.GemsFDTD | 88 | 1949 | 479 | 1948 | 479 | **1949** | **479** | 88 | 1949 | 479 | 1948 | 479 | **1949** | **479** |
| 465.tonto | 88 | **683** | **1270** | 682 | 1270 | 686 | 1260 | 88 | 654 | 1320 | **643** | **1350** | 639 | 1350 |
| 470.lbm | 88 | 1251 | 966 | **1252** | **966** | 1252 | 966 | 88 | 1251 | 966 | **1252** | **966** | 1252 | 966 |
| 481.wrf | 88 | 1189 | 827 | **1190** | **826** | 1199 | 820 | 88 | 1189 | 827 | **1190** | **826** | 1199 | 820 |
| 482.sphinx3 | 88 | **1823** | **941** | 1817 | 944 | 1828 | 938 | 88 | **1823** | **941** | 1817 | 944 | 1828 | 938 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Platform Notes

```
BIOS settings:
Snoop Mode set to Cluster on Die
Virtualization Technology disabled
```

Continued on next page

## Platform Notes (Continued)

```
System Profile set to custom
CPU Power Management set to Hardware P States
C States set to Autonomous
C1E disabled
Energy Efficient Turbo disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Balanced Performance
Memory Patrol Scrub disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Aug  5 09:15:30 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz
      2 "physical id"s (chips)
      88 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 22
      siblings  : 44
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
      28
      physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
      28
   cache size : 28160 KB

From /proc/meminfo
   MemTotal:       264040144 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.2 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.2"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
```

Continued on next page

## Platform Notes (Continued)

```
     EDT 2015 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Aug 4 04:11

  SPEC is set to: /root/cpu2006-1.2
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      xfs   179G  8.2G  171G   5% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS Dell Inc. 2.1.7 06/16/2016
    Memory:
     15x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz
     1x 00CE00B300CE M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz
     8x Not Specified Not Specified

  (End of data from sysinfo program)
```

## General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
The Dell PowerEdge R730 and the PowerEdge R730xd models are electronically equivalent.
The results have been measured on a Dell PowerEdge R730xd model.
 Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB
 memory using RedHat EL 7.2 glibc 2.17
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Continued on next page

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

## Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:
icc -m64

Continued on next page

## Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

Continued on next page

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml


SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Aug 24 13:14:34 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 August 2016.