SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECfp®_rate2006 = 1120

SPECfp_rate_base2006 = 1090

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Nov-2015
Hardware Availability: Apr-2016
Software Availability: Dec-2015

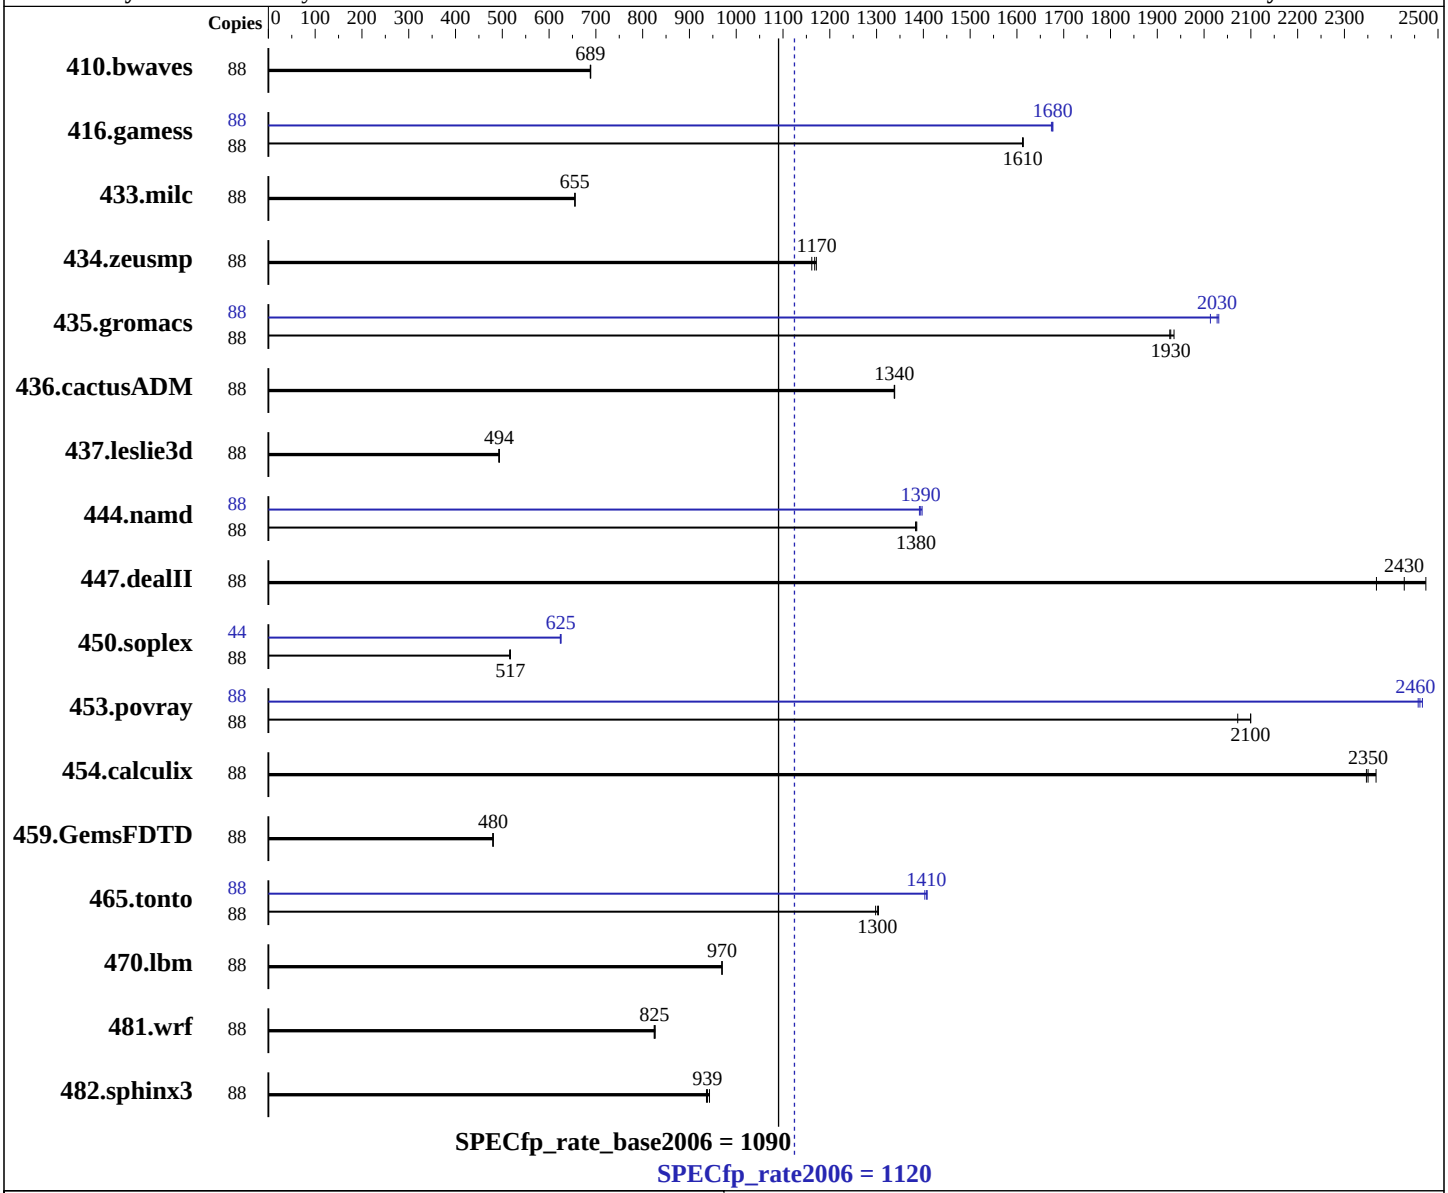

Hardware

CPU Name:	Intel Xeon E5-2699 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	44 cores, 2 chips, 22 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECfp_rate2006 = 1120

SPECfp_rate_base2006 = 1090

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Nov-2015
Hardware Availability: Apr-2016
Software Availability: Dec-2015

L3 Cache: 55 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 960 GB SAS HDD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	88	1736	689	1738	688	**1737**	**689**	88	1736	689	1738	688	**1737**	**689**
416.gamess	88	1068	1610	**1069**	**1610**	1069	1610	88	**1028**	**1680**	1028	1680	1029	1670
433.milc	88	1233	655	**1233**	**655**	1233	655	88	1233	655	**1233**	**655**	1233	655
434.zeusmp	88	689	1160	**686**	**1170**	684	1170	88	689	1160	**686**	**1170**	684	1170
435.gromacs	88	**326**	**1930**	325	1940	326	1930	88	309	2030	**310**	**2030**	312	2010
436.cactusADM	88	786	1340	**786**	**1340**	786	1340	88	786	1340	**786**	**1340**	786	1340
437.leslie3d	88	1675	494	**1676**	**494**	1680	492	88	1675	494	**1676**	**494**	1680	492
444.namd	88	510	1380	**510**	**1380**	509	1390	88	505	1400	**506**	**1390**	507	1390
447.dealII	88	425	2370	407	2470	**415**	**2430**	88	425	2370	407	2470	**415**	**2430**
450.soplex	88	1419	517	**1419**	**517**	1423	516	44	587	626	**587**	**625**	588	624
453.povray	88	223	2100	**223**	**2100**	226	2070	88	190	2470	190	2460	**190**	**2460**
454.calculix	88	**309**	**2350**	307	2370	309	2350	88	**309**	**2350**	307	2370	309	2350
459.GemsFDTD	88	1946	480	**1945**	**480**	1942	481	88	1946	480	**1945**	**480**	1942	481
465.tonto	88	**665**	**1300**	667	1300	664	1300	88	615	1410	617	1400	**615**	**1410**
470.lbm	88	1247	970	1247	970	**1247**	**970**	88	1247	970	1247	970	**1247**	**970**
481.wrf	88	**1191**	**825**	1189	827	1192	825	88	**1191**	**825**	1189	827	1192	825
482.sphinx3	88	1819	943	1832	936	**1827**	**939**	88	1819	943	1832	936	**1827**	**939**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
CPU performance set to Enterprise
Power Technology set to Energy Efficient
```

Continued on next page

Platform Notes (Continued)

```
Energy Performance BIAS setting set to Balanced Performance
Memory RAS configuration set to Maximum Performance
Memory Power Saving Mode set to Disabled
QPI Snoop Mode set to Cluster-on-Die
 Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6914
 $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
 running on linux-pglw Mon Nov 30 07:45:58 2015

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz
       2 "physical id"s (chips)
       88 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 22
       siblings  : 44
       physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
       28
       physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
       28
    cache size : 28160 KB

 From /proc/meminfo
    MemTotal:       264198720 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP1

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 1
       # This file is deprecated and will be removed in a future service pack or
       release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP1"
       VERSION_ID="12.1"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

Continued on next page

Platform Notes (Continued)

```
uname -a:
   Linux linux-pglw 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
   (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 29 19:02

SPEC is set to: /home/cpu2006-1.2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   890G  7.4G  882G   1% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS Cisco Systems, Inc. C240M4.2.0.10c.0.032320160820 03/23/2016
  Memory:
   16x 0xCE00 M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz
   8x NO DIMM NO DIMM

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2/libs/32:/home/cpu2006-1.2/libs/64:/home/cpu2006-1.2/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Continued on next page

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Aug 24 13:15:16 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 August 2016.