SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2643 v4, 3.40 GHz)

SPECfp®_rate2006 = 613

SPECfp_rate_base2006 = 603

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2016
Hardware Availability: Jun-2016
Software Availability: Mar-2016

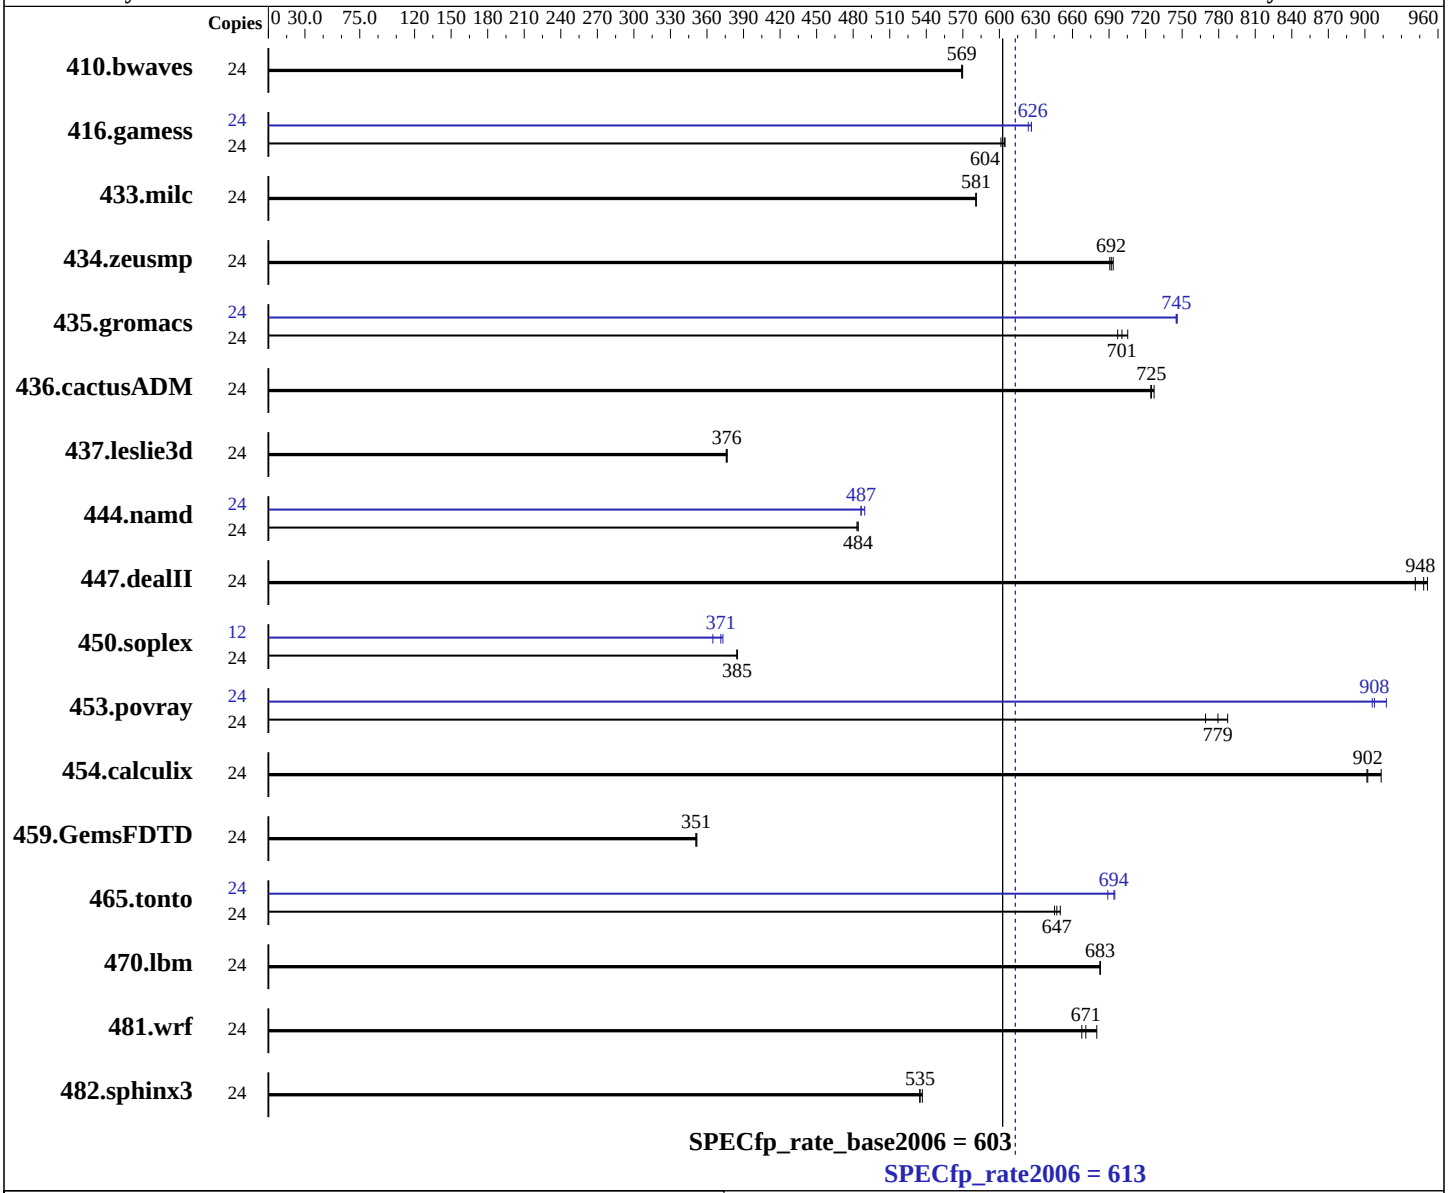

Hardware

CPU Name:	Intel Xeon E5-2643 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R630 (Intel Xeon E5-2643 v4, 3.40 GHz)

SPECfp_rate2006 = 613

SPECfp_rate_base2006 = 603

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2016
Hardware Availability: Jun-2016
Software Availability: Mar-2016

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R)
Disk Subsystem: 1 x 400 GB SATA SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	573	569	**573**	**569**	572	570	24	573	569	**573**	**569**	572	570
416.gamess	24	782	601	777	605	**778**	**604**	24	753	624	750	626	**750**	**626**
433.milc	24	379	581	379	581	**379**	**581**	24	379	581	379	581	**379**	**581**
434.zeusmp	24	316	691	**316**	**692**	315	693	24	316	691	**316**	**692**	315	693
435.gromacs	24	246	697	243	705	**245**	**701**	24	230	745	**230**	**745**	230	746
436.cactusADM	24	396	724	**396**	**725**	395	727	24	396	724	**396**	**725**	395	727
437.leslie3d	24	599	377	**600**	**376**	600	376	24	599	377	**600**	**376**	600	376
444.namd	24	**398**	**484**	398	484	398	483	24	393	489	**396**	**487**	396	486
447.dealII	24	292	941	**290**	**948**	289	951	24	292	941	**290**	**948**	289	951
450.soplex	24	521	384	520	385	**520**	**385**	12	268	373	274	365	**269**	**371**
453.povray	24	162	787	**164**	**779**	166	769	24	**141**	**908**	139	918	141	906
454.calculix	24	217	913	**219**	**902**	220	902	24	217	913	**219**	**902**	220	902
459.GemsFDTD	24	726	351	**725**	**351**	724	352	24	726	351	**725**	**351**	724	352
465.tonto	24	366	645	**365**	**647**	363	650	24	**340**	**694**	343	689	340	695
470.lbm	24	483	683	**483**	**683**	483	683	24	483	683	**483**	**683**	483	683
481.wrf	24	**400**	**671**	402	668	394	680	24	**400**	**671**	402	668	394	680
482.sphinx3	24	871	537	875	535	**874**	**535**	24	871	537	875	535	**874**	**535**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Snoop Mode set to Cluster on Die
Virtualization Technology disabled
```

Continued on next page

Platform Notes (Continued)

```
System Profile set to custom
CPU Performance set to Hardware P States
C States set to Autonomous
C1E disabled
Energy Efficient Turbo disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Balanced Performance
Memory Patrol Scrub disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Jul 15 20:20:52 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2643 v4 @ 3.40GHz
      2 "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 12
      physical 0: cores 0 1 2 3 6 7
      physical 1: cores 0 1 2 3 6 7
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       264040560 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.2 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.2"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
   EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page

Platform Notes (Continued)

```
 run-level 3 Jul 15 11:55

 SPEC is set to: /root/cpu2006-1.2
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      xfs   272G  8.4G  263G   4% /
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS Dell Inc. 2.0.1 02/12/2016
   Memory:
    13x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz
    3x 00CE00B300CE M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz
    8x Not Specified Not Specified

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

 Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB
 memory using RedHat EL 7.2 glibc 2.17
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Nov 10 18:54:05 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 September 2016.