SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2028R-TXR
(X10DRX , Intel Xeon E5-2603 v4)

SPECfp®2006 = 67.5

SPECfp_base2006 = 65.7

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Sep-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

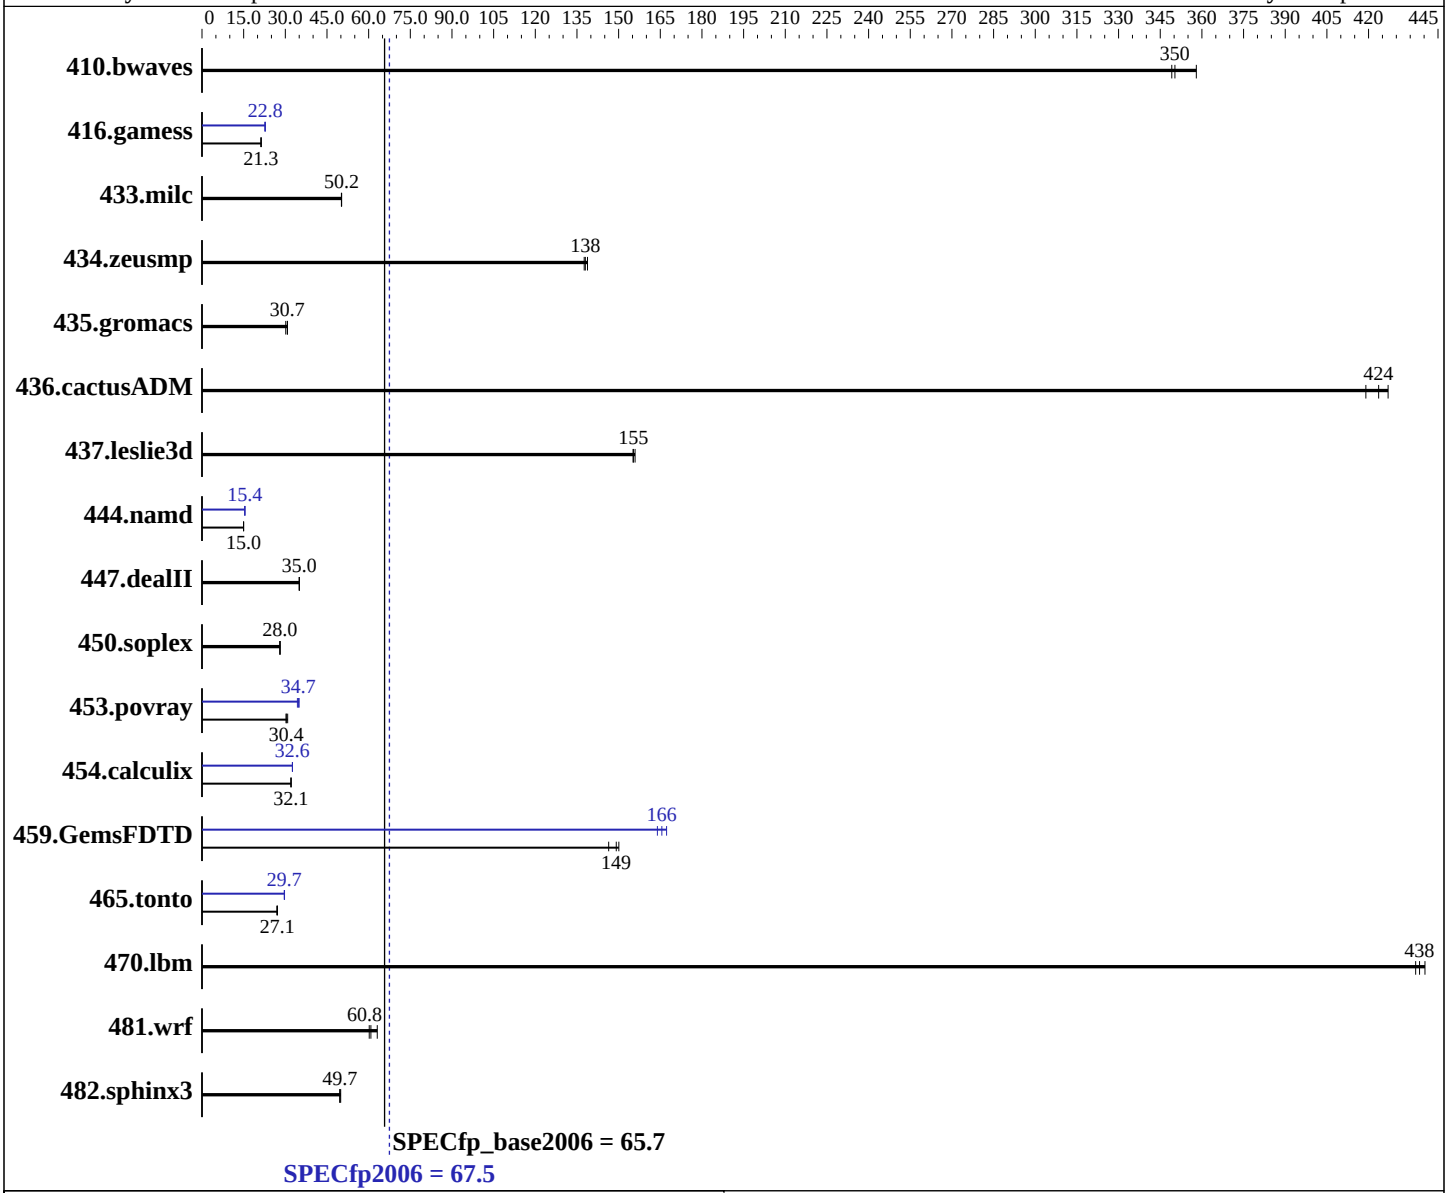

Hardware

CPU Name:	Intel Xeon E5-2603 v4
CPU Characteristics:	
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2, Kernel 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2028R-TXR
(X10DRX , Intel Xeon E5-2603 v4)

SPECfp2006 = 67.5

SPECfp_base2006 = 65.7

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Sep-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 1Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem: 1 x 512 GB SATA III SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**38.8**	**350**	38.9	349	38.0	358	**38.8**	**350**	38.9	349	38.0	358
416.gamess	918	21.3	922	21.2	**921**	**21.3**	**860**	**22.8**	860	22.8	865	22.6
433.milc	**183**	**50.2**	183	50.3	183	50.2	**183**	**50.2**	183	50.3	183	50.2
434.zeusmp	66.1	138	**65.9**	**138**	65.6	139	66.1	138	**65.9**	**138**	65.6	139
435.gromacs	232	30.8	**232**	**30.7**	237	30.2	232	30.8	**232**	**30.7**	237	30.2
436.cactusADM	28.0	427	**28.2**	**424**	28.5	419	28.0	427	**28.2**	**424**	28.5	419
437.leslie3d	**60.5**	**155**	60.3	156	60.6	155	**60.5**	**155**	60.3	156	60.6	155
444.namd	**536**	**15.0**	536	15.0	536	15.0	520	15.4	**520**	**15.4**	520	15.4
447.dealII	327	35.0	326	35.1	**327**	**35.0**	327	35.0	326	35.1	**327**	**35.0**
450.soplex	296	28.1	297	28.0	**297**	**28.0**	296	28.1	297	28.0	**297**	**28.0**
453.povray	176	30.3	172	30.8	**175**	**30.4**	**153**	**34.7**	152	35.0	155	34.3
454.calculix	257	32.1	257	32.1	**257**	**32.1**	**253**	**32.6**	253	32.6	254	32.5
459.GemsFDTD	**71.1**	**149**	70.7	150	72.5	146	63.4	167	64.7	164	**64.1**	**166**
465.tonto	**363**	**27.1**	362	27.2	365	27.0	331	29.7	332	29.6	**332**	**29.7**
470.lbm	31.4	437	31.2	440	**31.3**	**438**	31.4	437	31.2	440	**31.3**	**438**
481.wrf	186	60.2	177	63.1	**184**	**60.8**	186	60.2	177	63.1	**184**	**60.8**
482.sphinx3	393	49.6	390	49.9	**392**	**49.7**	393	49.6	390	49.9	**392**	**49.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Early Snoop = Disabled
Enforce POR = Disabled
Memory Frequency = 1866
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Tue Sep 20 00:05:47 2016

This section contains SUT (System Under Test) info as seen by
```

Continued on next page

Platform Notes (Continued)

```
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2603 v4@ 1.70GHz
      2 "physical id"s (chips)
      12 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 6
      physical 0: cores 0 1 2 3 4 5
      physical 1: cores 0 1 2 3 4 5
   cache size : 15360 KB

From /proc/meminfo
   MemTotal:       131750552 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.2 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.2"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
   EDT 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 19 14:47

SPEC is set to: /usr/cpu2006
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-root xfs    50G  8.7G   42G  18% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS American Megatrends Inc. 2.0 12/17/2015
```

Continued on next page

Platform Notes (Continued)

```
      Memory:
       16x Hynix Semiconductor HMA41GR7MFR4N-TF 8 GB 1 rank 2133 MHz, configured at
       1866 MHz

    (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"
OMP_NUM_THREADS = "12"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
```

Continued on next page

Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Oct 19 10:28:59 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 October 2016.