SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECint®2006 = 59.6

SPECint_base2006 = 57.4

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Sep-2016
Hardware Availability: Mar-2016
Software Availability: Mar-2016

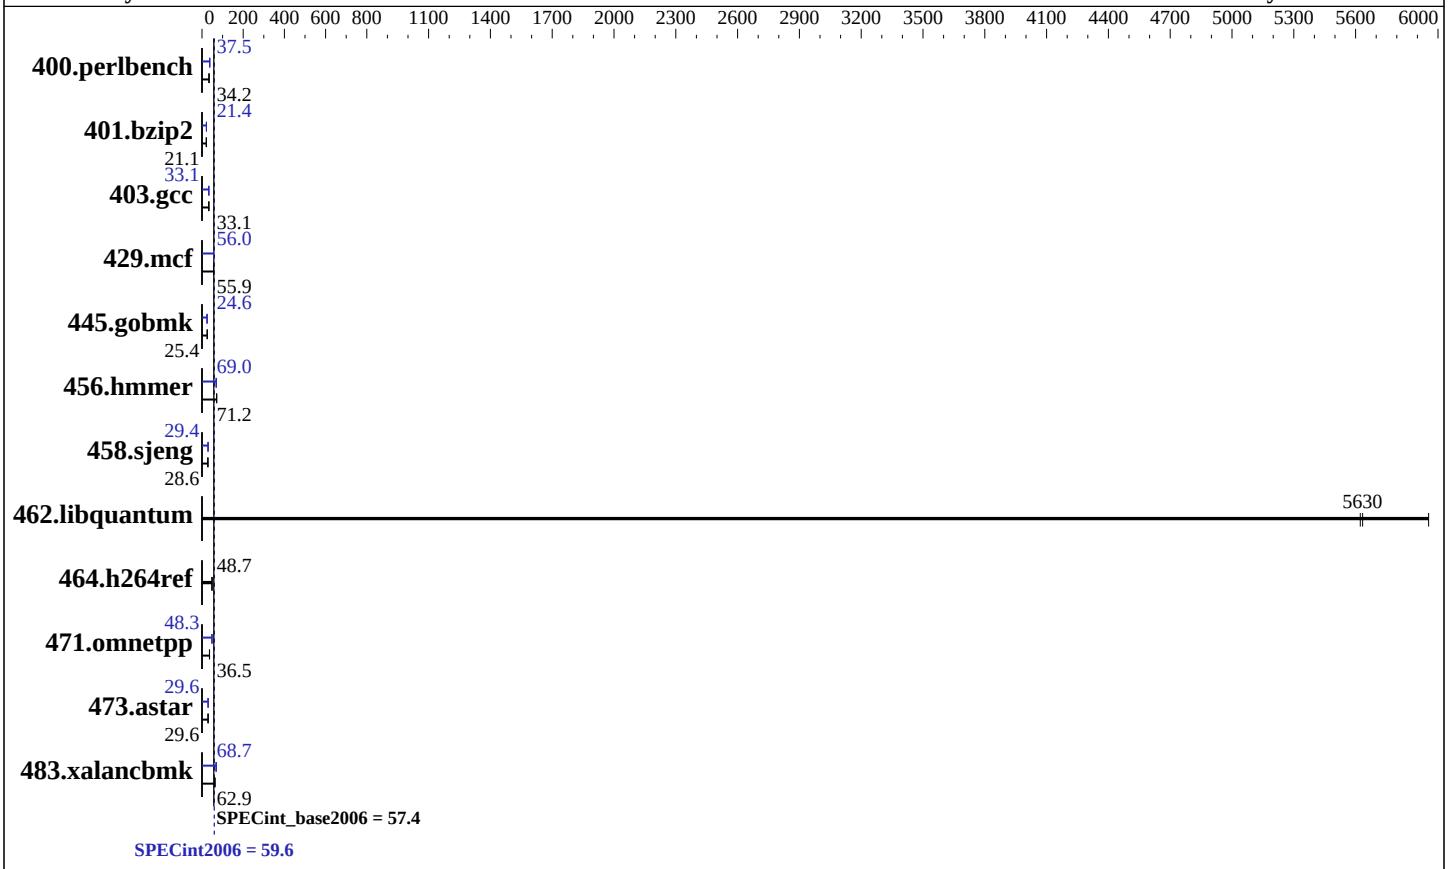

Hardware

CPU Name:	Intel Xeon E5-2650 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 2.90 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem:	1 x 240 GB SATA II SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) 3.10.0-327.18.2.el7.x86_64
Compiler:	C/C++: Version 16.0.3.210 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECint2006 = 59.6

SPECint_base2006 = 57.4

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Sep-2016
Hardware Availability: Mar-2016
Software Availability: Mar-2016

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	285	34.2	**286**	**34.2**	286	34.1	260	37.6	260	37.5	**260**	**37.5**
401.bzip2	457	21.1	458	21.0	**458**	**21.1**	451	21.4	**451**	**21.4**	449	21.5
403.gcc	244	33.0	**243**	**33.1**	243	33.2	245	32.9	**243**	**33.1**	242	33.3
429.mcf	162	56.2	**163**	**55.9**	164	55.7	162	56.2	163	55.9	**163**	**56.0**
445.gobmk	**413**	**25.4**	413	25.4	413	25.4	**426**	**24.6**	426	24.6	426	24.6
456.hmmer	**131**	**71.2**	132	70.8	131	71.2	135	69.1	**135**	**69.0**	135	68.9
458.sjeng	424	28.6	423	28.6	**424**	**28.6**	411	29.4	**411**	**29.4**	411	29.4
462.libquantum	3.69	5620	3.48	5950	**3.68**	**5630**	3.69	5620	3.48	5950	**3.68**	**5630**
464.h264ref	**455**	**48.7**	454	48.7	456	48.5	**455**	**48.7**	454	48.7	456	48.5
471.omnetpp	171	36.6	**171**	**36.5**	174	36.0	130	48.3	129	48.5	**129**	**48.3**
473.astar	238	29.6	**237**	**29.6**	237	29.7	237	29.6	236	29.7	**237**	**29.6**
483.xalancbmk	112	61.7	109	63.2	**110**	**62.9**	100	68.9	**100**	**68.7**	101	68.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Bios Settings:
Intel(R) Hyper-Threading Tech = Disabled
Power & Performance = Performance
Enforce POR = Disabled
Memory Operating Speed Selection = 2400
Cluster-on-Die = Disabled
Set FAN Profile = Performance
Fan PWM Offset = 0

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on SUT Tue Sep 20 02:44:41 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo
```

Continued on next page

Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2650 v4 @ 2.20GHz
      2 "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 12
      siblings  : 12
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
      physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
   cache size : 30720 KB

From /proc/meminfo
   MemTotal:       263856648 kB
   HugePages_Total:       1
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.2 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.2"
      PRETTY_NAME="Red Hat Enterprise Linux"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
   os-release.rpmsave:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.0 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.0"
      PRETTY_NAME="Red Hat Enterprise Linux"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:
   Linux SUT 3.10.0-327.18.2.el7.x86_64 #2 SMP Wed Jun 1 17:37:13 CEST 2016
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 19 16:06

SPEC is set to: /cpu2006.1.2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda1      ext4  212G  118G   84G  59% /
```

Continued on next page

Platform Notes (Continued)

```
 Additional information from dmidecode:
   BIOS Intel Corporation SE5C610.86B.11.01.0136.062220161656 06/22/2016
   Memory:
    16x   16 GB
    16x Hynix HMA42GR7AFR4N-UH 16 GB 2400 MHz 2 rank
    8x NO DIMM NO DIMM

 (End of data from sysinfo program)
 dmidecode does not properly detect memory modules
 16 modules of 16 GB were used to run the test (256 GB total)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"
OMP_NUM_THREADS = "24"

 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 Binaries compiled on a system with 2x Xeon E5-2650 v4 chips + 256 GB memory
 using RedHat EL 7.2
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
  401.bzip2: -DSPEC_CPU_LP64
    403.gcc: -DSPEC_CPU_LP64
    429.mcf: -DSPEC_CPU_LP64
  445.gobmk: -DSPEC_CPU_LP64
  456.hmmer: -DSPEC_CPU_LP64
  458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
  464.h264ref: -DSPEC_CPU_LP64
  471.omnetpp: -DSPEC_CPU_LP64
    473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32`
`-Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap64`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin`

445.gobmk: `icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin`

C++ benchmarks:

471.omnetpp: `icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin`

473.astar: `icpc -m64`

483.xalancbmk: `icpc -m32 -L/opt/intel/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 15 16:05:41 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 November 2016.