SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 232 S6 (Intel Xeon E5-2603 v4, 1.70 GHz)

SPECint®2006 = 36.3

SPECint_base2006 = 34.8

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Nov-2016
Hardware Availability: Mar-2016
Software Availability: Mar-2016

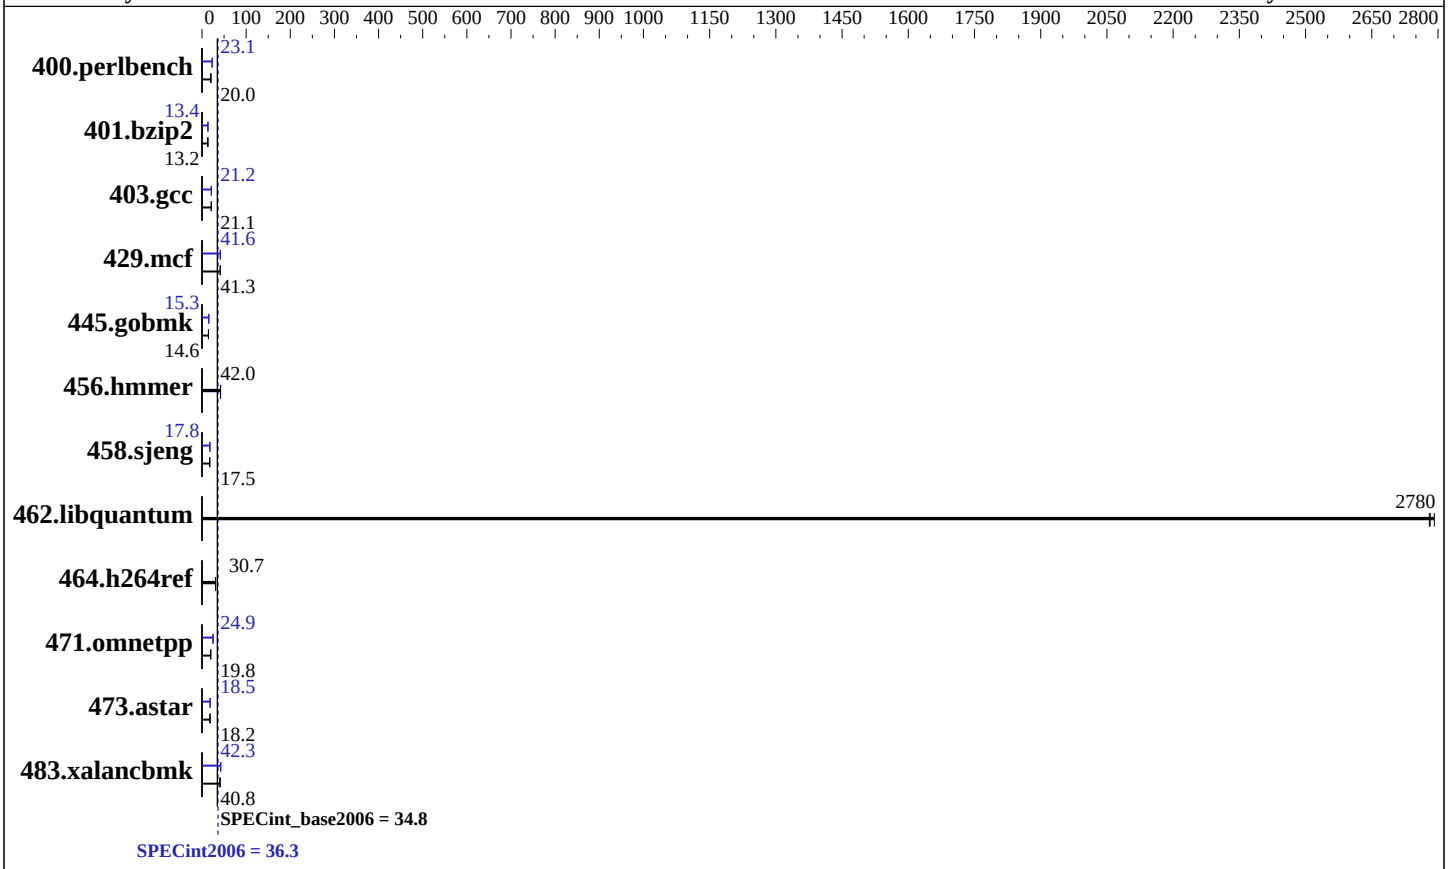

Hardware

CPU Name:	Intel Xeon E5-2603 v4
CPU Characteristics:	
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133T-R, running at 1866 MHz)
Disk Subsystem:	1 x 240 GB SATA II SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) 3.10.0-327.18.2.el7.x86_64
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 232 S6 (Intel Xeon E5-2603 v4, 1.70 GHz)

SPECint2006 = 36.3

SPECint_base2006 = 34.8

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Nov-2016
Hardware Availability: Mar-2016
Software Availability: Mar-2016

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	487	20.1	**487**	**20.0**	488	20.0	**424**	**23.1**	423	23.1	426	23.0
401.bzip2	730	13.2	**730**	**13.2**	729	13.2	**719**	**13.4**	719	13.4	719	13.4
403.gcc	**382**	**21.1**	383	21.0	381	21.1	379	21.2	382	21.1	**380**	**21.2**
429.mcf	221	41.3	**221**	**41.3**	218	41.8	219	41.6	**219**	**41.6**	220	41.4
445.gobmk	716	14.7	**717**	**14.6**	717	14.6	**685**	**15.3**	685	15.3	685	15.3
456.hmmer	223	41.8	**222**	**42.0**	222	42.0	223	41.8	**222**	**42.0**	222	42.0
458.sjeng	693	17.5	693	17.4	**693**	**17.5**	681	17.8	681	17.8	**681**	**17.8**
462.libquantum	7.45	2780	**7.45**	**2780**	7.42	2790	7.45	2780	**7.45**	**2780**	7.42	2790
464.h264ref	721	30.7	**721**	**30.7**	718	30.8	721	30.7	**721**	**30.7**	718	30.8
471.omnetpp	**316**	**19.8**	316	19.8	317	19.7	251	24.9	250	25.0	**251**	**24.9**
473.astar	**386**	**18.2**	386	18.2	385	18.2	381	18.4	**380**	**18.5**	380	18.5
483.xalancbmk	169	40.8	169	40.8	**169**	**40.8**	163	42.5	164	42.1	**163**	**42.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Bios Settings
Power Technology = Energy Efficient
Enforce POR = Disabled
Memory Frequency = 1866

BMC Setting
Fan Mode = Full Speed

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on SUT Wed Nov 23 12:56:47 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2603 v4 @ 1.70GHz
```

Continued on next page

Platform Notes (Continued)

```
        2 "physical id"s (chips)
        12 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 6
        siblings  : 6
        physical 0: cores 0 1 2 3 4 5
        physical 1: cores 0 1 2 3 4 5
     cache size : 15360 KB

  From /proc/meminfo
     MemTotal:       263860636 kB
     HugePages_Total:       1
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.2 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.2"
        PRETTY_NAME="Red Hat Enterprise Linux"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
     os-release.rpmsave:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.0 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.0"
        PRETTY_NAME="Red Hat Enterprise Linux"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
     redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

  uname -a:
     Linux SUT 3.10.0-327.18.2.el7.x86_64 #2 SMP Wed Jun 1 17:37:13 CEST 2016
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Nov 23 13:55

  SPEC is set to: /cpu2006.1.2
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda1      ext4  212G   79G  122G  40% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
```

Continued on next page

Platform Notes (Continued)

```
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS American Megatrends Inc. 2.0a 07/26/2016
   Memory:
    16x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1866 MHz

 (End of data from sysinfo program)
 dmidecode does not properly detect memory modules
 16 modules of 16 GB were used to run the test (256 GB total)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh10.2"
OMP_NUM_THREADS = "12"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default.
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

```
    400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
      401.bzip2: -DSPEC_CPU_LP64
        403.gcc: -DSPEC_CPU_LP64
        429.mcf: -DSPEC_CPU_LP64
      445.gobmk: -DSPEC_CPU_LP64
      456.hmmer: -DSPEC_CPU_LP64
      458.sjeng: -DSPEC_CPU_LP64
  462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
    464.h264ref: -DSPEC_CPU_LP64
    471.omnetpp: -DSPEC_CPU_LP64
      473.astar: -DSPEC_CPU_LP64
  483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch -auto-p32`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

445.gobmk: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

C++ benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-qopt-prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div -auto-ilp32 -qopt-prefetch`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -qopt-malloc-options=3 -auto-ilp32`

429.mcf: `-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch -auto-p32`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2)

456.hmmer: `basepeak = yes`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-unroll4`

462.libquantum: `basepeak = yes`

464.h264ref: `basepeak = yes`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-qopt-ra-region-strategy=block -Wl,-z,muldefs -L/sh10.2 -lsmartheap`

473.astar: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64`

483.xalancbmk: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -Wl,-z,muldefs -L/sh10.2 -lsmartheap`

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Dec 15 11:16:30 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 December 2016.