



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp®_rate2006 = 833

Huawei CH220 V3 (Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 814

CPU2006 license: 3175


Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

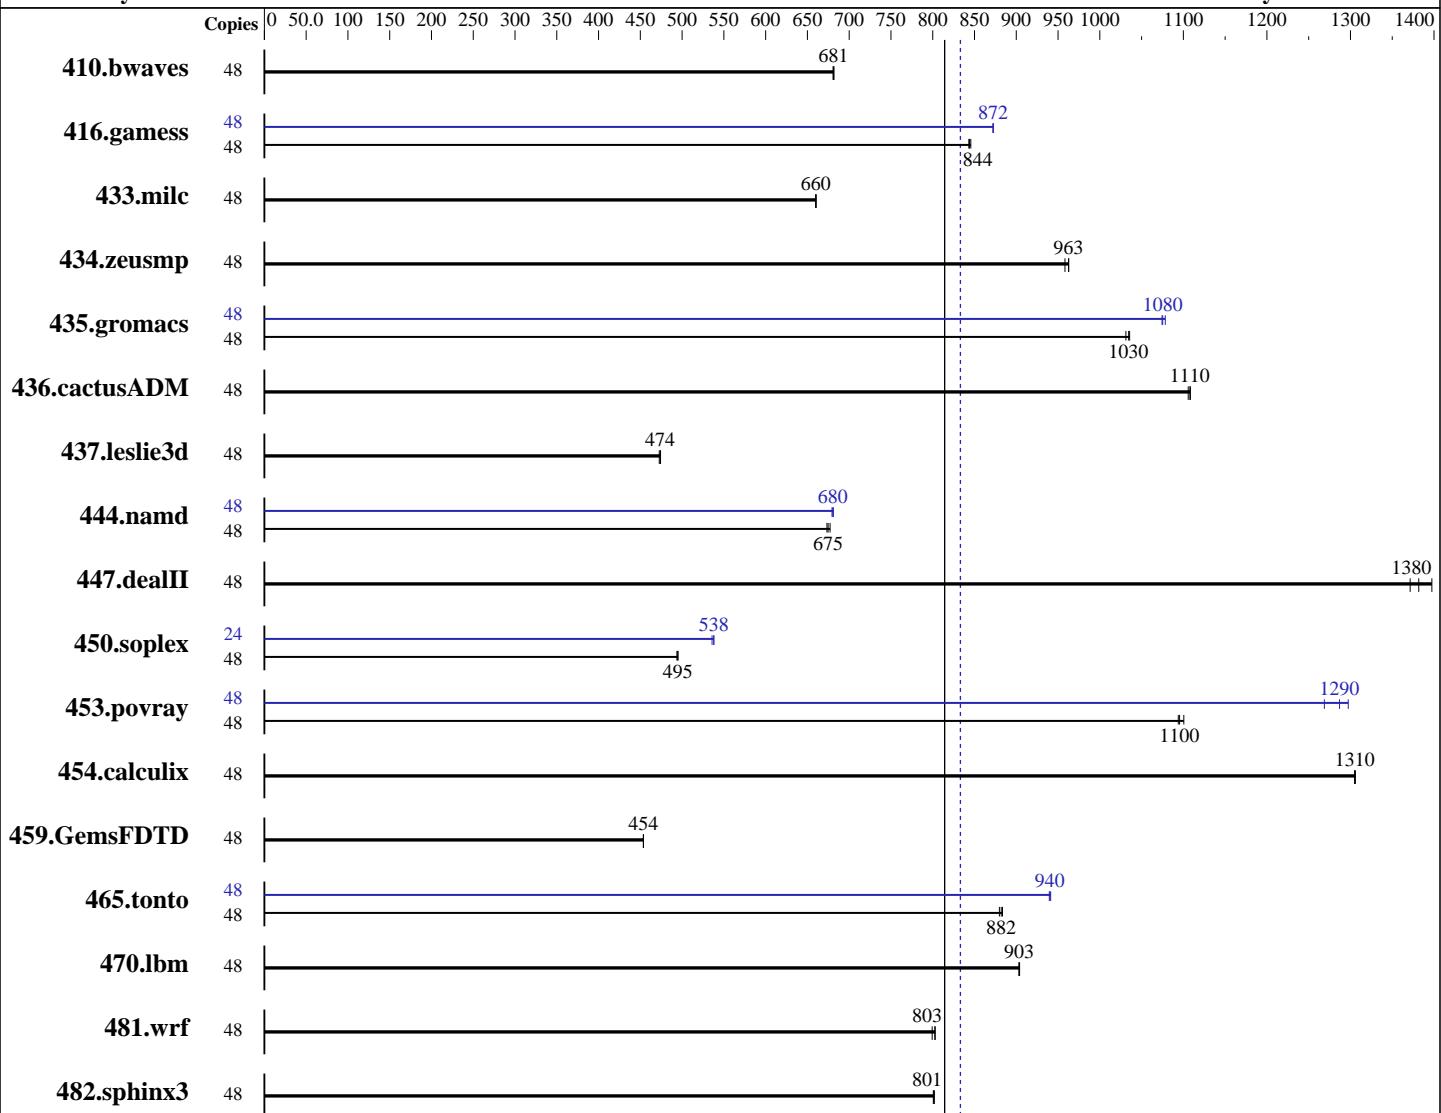

SPECfp_rate_base2006 = 814

SPECfp_rate2006 = 833

Hardware

CPU Name: Intel Xeon E5-2650 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 833

Huawei CH220 V3 (Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 814

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R)
 Disk Subsystem: 1 x 600 GB SAS, 10000 RPM
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	958	681	<u>958</u>	<u>681</u>	957	682	48	958	681	<u>958</u>	<u>681</u>	957	682
416.gamess	48	<u>1113</u>	<u>844</u>	1115	843	1111	846	48	<u>1077</u>	<u>872</u>	1077	872	1077	872
433.milc	48	<u>667</u>	<u>660</u>	668	660	667	660	48	<u>667</u>	<u>660</u>	668	660	667	660
434.zeusmp	48	456	958	<u>454</u>	<u>963</u>	454	963	48	456	958	<u>454</u>	<u>963</u>	454	963
435.gromacs	48	331	1040	332	1030	<u>331</u>	<u>1030</u>	48	319	1070	318	1080	<u>319</u>	<u>1080</u>
436.cactusADM	48	<u>518</u>	<u>1110</u>	519	1110	518	1110	48	<u>518</u>	<u>1110</u>	519	1110	518	1110
437.leslie3d	48	<u>952</u>	<u>474</u>	951	474	955	473	48	<u>952</u>	<u>474</u>	951	474	955	473
444.namd	48	<u>570</u>	<u>675</u>	569	677	572	673	48	567	679	565	681	<u>566</u>	<u>680</u>
447.dealII	48	<u>397</u>	<u>1380</u>	400	1370	393	1400	48	<u>397</u>	<u>1380</u>	400	1370	393	1400
450.soplex	48	<u>809</u>	<u>495</u>	811	494	809	495	24	374	536	<u>372</u>	<u>538</u>	372	538
453.povray	48	233	1090	232	1100	<u>233</u>	<u>1100</u>	48	197	1300	201	1270	<u>198</u>	<u>1290</u>
454.calculix	48	<u>303</u>	<u>1310</u>	303	1310	303	1310	48	<u>303</u>	<u>1310</u>	303	1310	303	1310
459.GemsFDTD	48	1123	454	<u>1123</u>	<u>454</u>	1122	454	48	1123	454	<u>1123</u>	<u>454</u>	1122	454
465.tonto	48	537	880	<u>536</u>	<u>882</u>	535	883	48	502	941	<u>502</u>	<u>940</u>	503	940
470.lbm	48	730	904	730	903	<u>730</u>	<u>903</u>	48	730	904	730	903	<u>730</u>	<u>903</u>
481.wrf	48	668	803	<u>668</u>	<u>803</u>	671	799	48	668	803	<u>668</u>	<u>803</u>	671	799
482.sphinx3	48	1167	802	1168	801	<u>1168</u>	<u>801</u>	48	1167	802	1168	801	<u>1168</u>	<u>801</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Set Power Efficiency Mode to Performance
 Set Snoop Mode to COD mode

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 833

Huawei CH220 V3 (Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 814

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

Platform Notes (Continued)

Set Patrol Scrub to Disable

Sysinfo program /spec16/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-test Tue Nov 22 08:13:27 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2650 v4@ 2.20GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

cache size : 15360 KB

From /proc/meminfo

MemTotal: 264073268 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 1

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION_ID="12.1"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

Linux linux-test 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 21 12:33

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei CH220 V3 (Intel Xeon E5-2650 v4)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECfp_rate2006 = 833

SPECfp_rate_base2006 = 814

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Platform Notes (Continued)

```
SPEC is set to: /spec16
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdal       ext4  542G  129G  412G  24% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Insyde Corp. 3.31 08/22/2016
Memory:
 16x Hynix HMA82GR7AFR8N-UH 16 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec16/libs/32:/spec16/libs/64:/spec16/sh"

```
Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
memory using RedHat EL 7.1
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 833

Huawei CH220 V3 (Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 814

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 833

Huawei CH220 V3 (Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 814

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei CH220 V3 (Intel Xeon E5-2650 v4)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECfp_rate2006 = 833

SPECfp_rate_base2006 = 814

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 833

Huawei CH220 V3 (Intel Xeon E5-2650 v4)

SPECfp_rate_base2006 = 814

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Dec 15 11:16:45 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 December 2016.