SPEC® CFP2006 Result

Sugon

Sugon I980-G20 (Intel Xeon E7-8890 v3)

SPECfp®_rate2006 = 3950

SPECfp_rate_base2006 = 3890

CPU2006 license:	9046	**Test date:**	Nov-2016
Test sponsor:	Sugon	**Hardware Availability:**	Jun-2016
Tested by:	Sugon	**Software Availability:**	Sep-2016

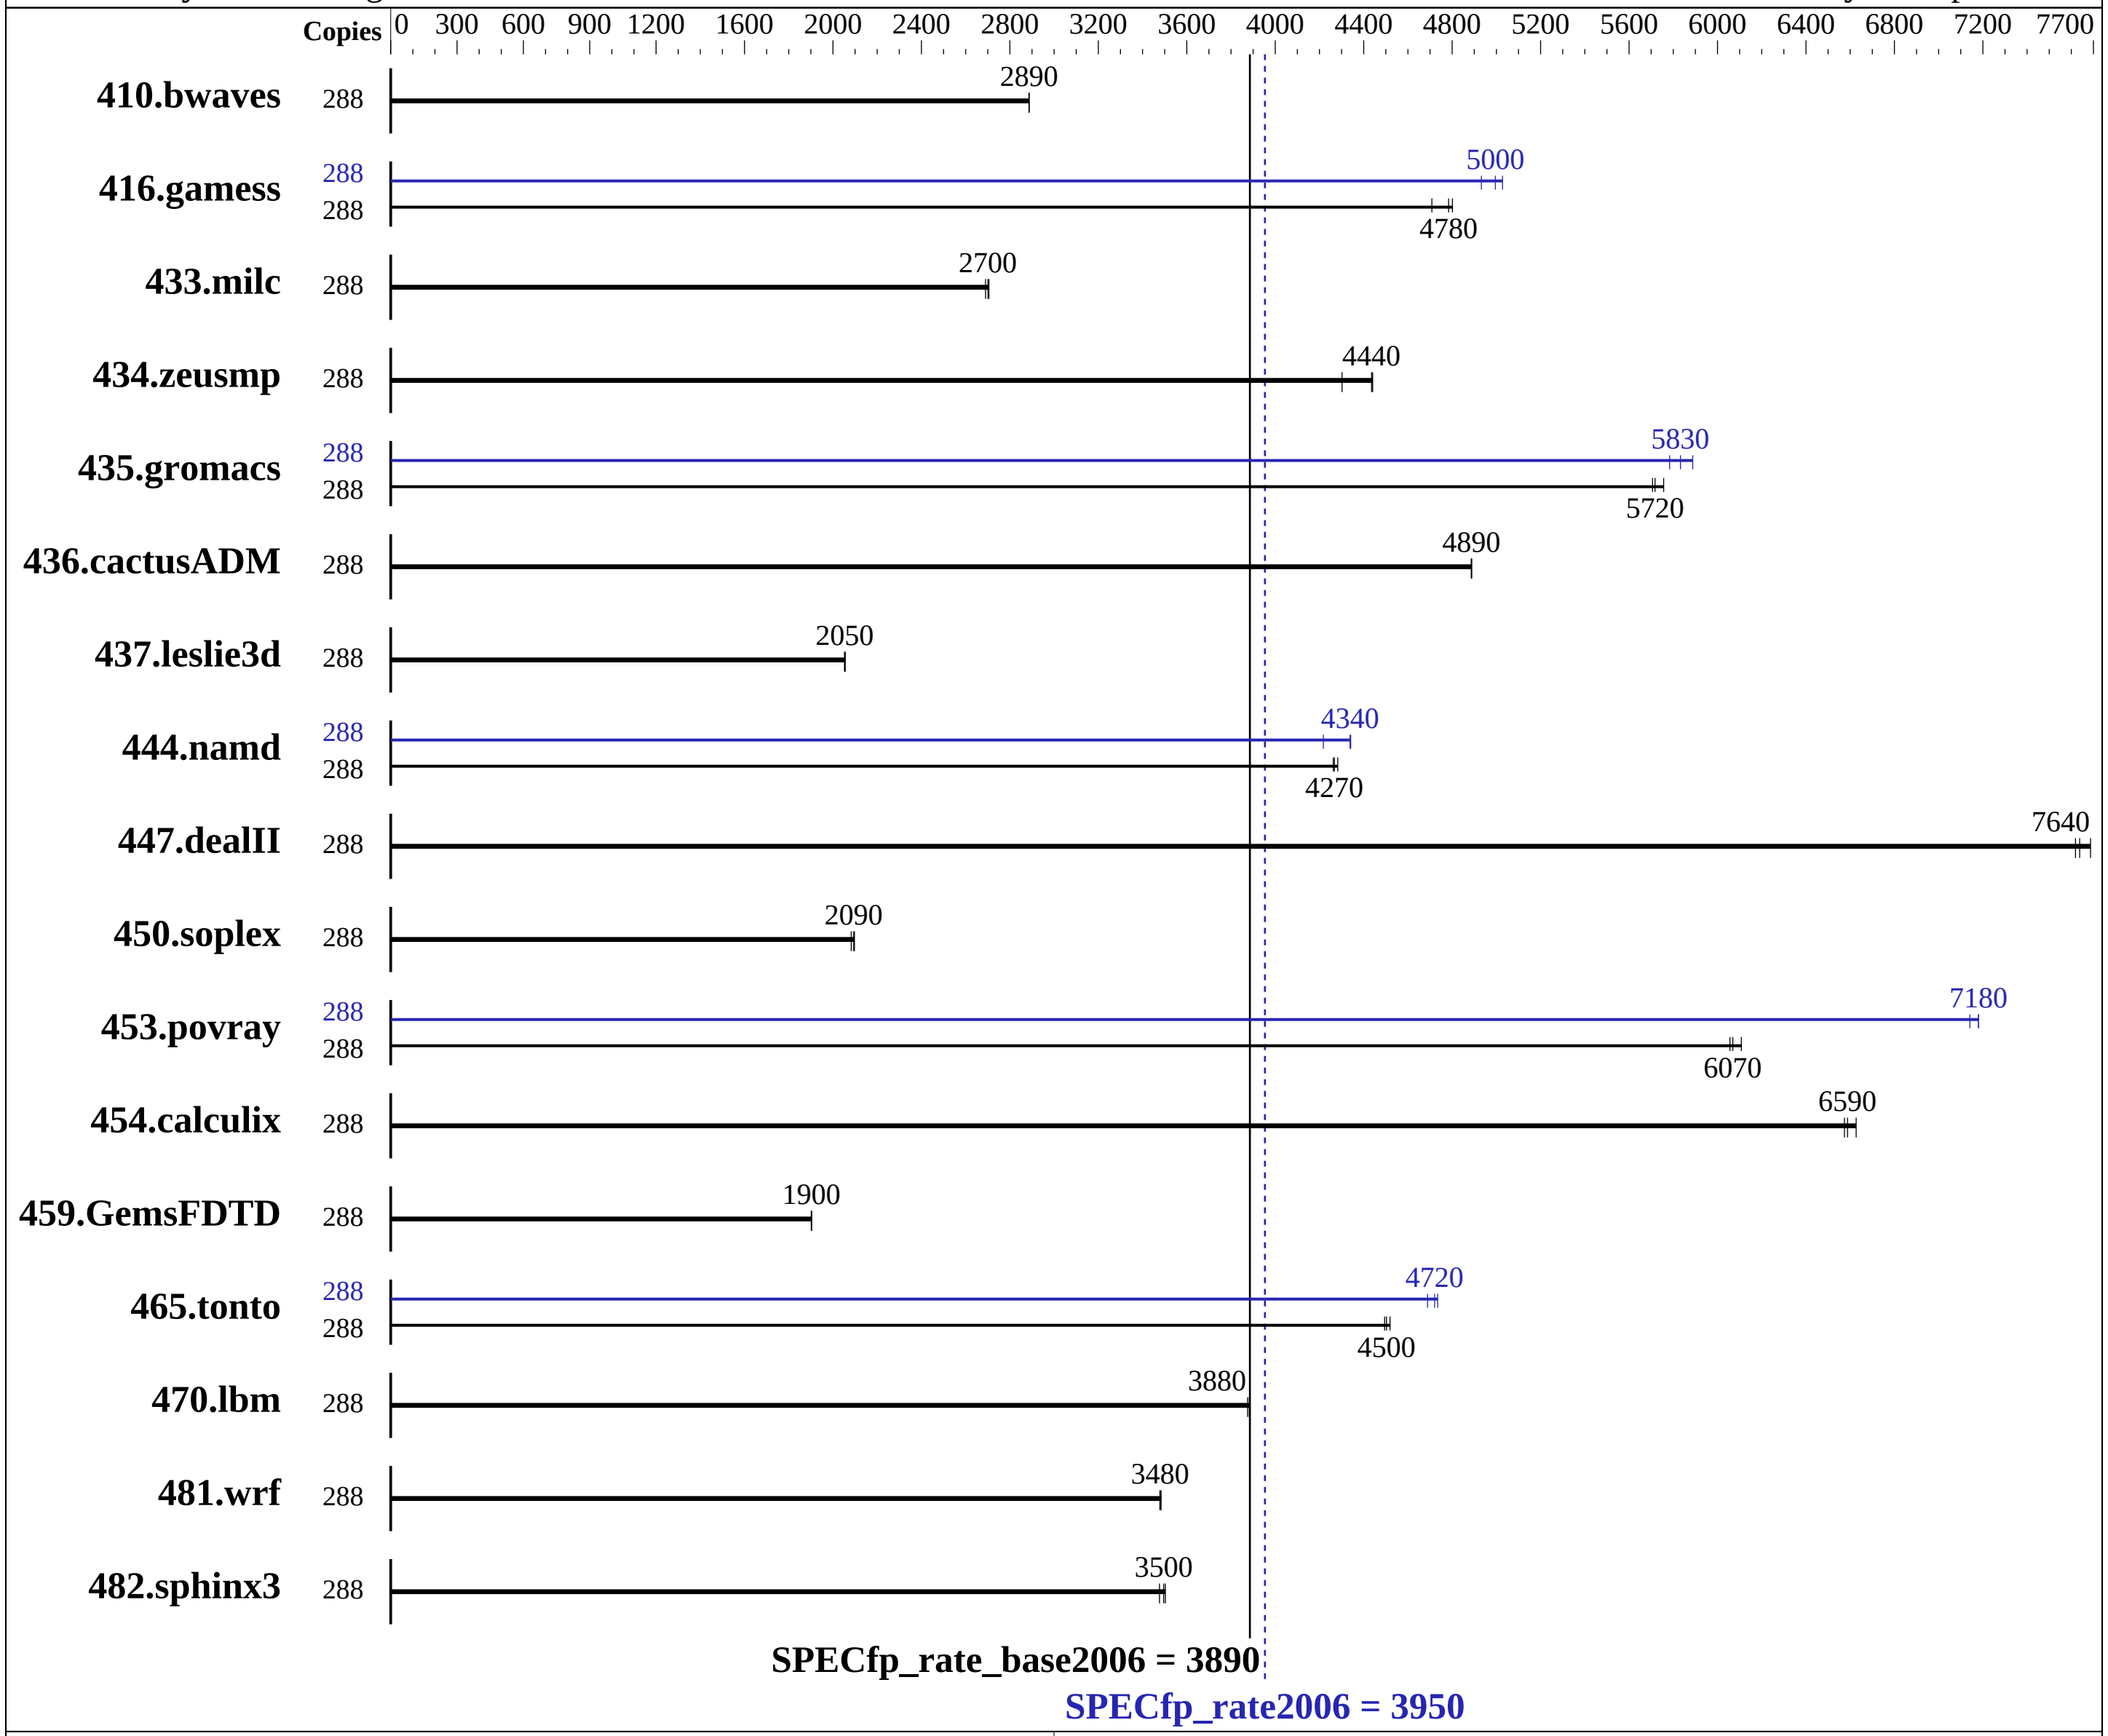

Hardware

CPU Name:	Intel Xeon E7-8890 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	144 cores, 8 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	2,4,8 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 5 (multi-user with GUI)

Continued on next page

Sugon

Sugon I980-G20 (Intel Xeon E7-8890 v3)

SPECfp_rate2006 = 3950

SPECfp_rate_base2006 = 3890

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Nov-2016
Hardware Availability: Jun-2016
Software Availability: Sep-2016

L3 Cache:	45 MB I+D on chip per chip
Other Cache:	None
Memory:	2 TB (128 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	1x2.0 TB SAS 7200 RPM
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	288	1356	2890	**1356**	**2890**	1356	2890	288	1356	2890	**1356**	**2890**	1356	2890
416.gamess	288	**1179**	**4780**	1198	4710	1174	4800	288	1143	4930	**1129**	**5000**	1122	5030
433.milc	288	983	2690	**979**	**2700**	977	2710	288	983	2690	**979**	**2700**	977	2710
434.zeusmp	288	609	4300	**591**	**4440**	590	4440	288	609	4300	**591**	**4440**	590	4440
435.gromacs	288	357	5760	360	5710	**360**	**5720**	288	356	5780	349	5890	**353**	**5830**
436.cactusADM	288	**704**	**4890**	704	4890	704	4890	288	**704**	**4890**	704	4890	704	4890
437.leslie3d	288	1317	2060	**1319**	**2050**	1319	2050	288	1317	2060	**1319**	**2050**	1319	2050
444.namd	288	542	4260	**541**	**4270**	539	4280	288	**532**	**4340**	532	4340	548	4220
447.dealII	288	432	7620	**431**	**7640**	429	7690	288	432	7620	**431**	**7640**	429	7690
450.soplex	288	1153	2080	**1147**	**2090**	1145	2100	288	1153	2080	**1147**	**2090**	1145	2100
453.povray	288	**252**	**6070**	253	6060	251	6110	288	215	7140	**213**	**7180**	213	7180
454.calculix	288	359	6630	**361**	**6590**	361	6570	288	359	6630	**361**	**6590**	361	6570
459.GemsFDTD	288	1607	1900	**1606**	**1900**	1605	1900	288	1607	1900	**1606**	**1900**	1605	1900
465.tonto	288	631	4490	627	4520	**629**	**4500**	288	**600**	**4720**	604	4690	599	4730
470.lbm	288	1019	3880	1021	3870	**1019**	**3880**	288	1019	3880	1021	3870	**1019**	**3880**
481.wrf	288	**925**	**3480**	925	3480	923	3480	288	**925**	**3480**	925	3480	923	3480
482.sphinx3	288	1615	3480	1602	3500	**1606**	**3500**	288	1615	3480	1602	3500	**1606**	**3500**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
fans are set to be running at full speed
BIOS Configuration:
Energy Performance BIAS setting. is set as Performance
```

Continued on next page

Platform Notes (Continued)

```
Sysinfo program /benchmarks/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-2u6u Sat Nov 19 17:36:11 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
      8 "physical id"s (chips)
      288 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 18
      siblings  : 36
      physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 4: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 5: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 6: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 7: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
   cache size : 46080 KB

From /proc/meminfo
   MemTotal:       2117881540 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 1
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP1"
      VERSION_ID="12.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

Continued on next page

Platform Notes (Continued)

```
uname -a:
   Linux linux-2u6u 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
   (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Nov 17 21:50

SPEC is set to: /benchmarks/cpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sdb1      ext4  1.8T  692G  1.1T  40% /benchmarks/cpu2006
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS American Megatrends Inc. 2.60 10/12/2016
  Memory:
   128x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1600 MHz
   64x NO DIMM NO DIMM

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/benchmarks/cpu2006/libs/32:/benchmarks/cpu2006/libs/64:/benchmarks/cpu2006/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -fno-alias -auto-ilp32 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-unroll4` `-auto` `-inline-calloc` `-qopt-malloc-options=3`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-qopt-prefetch` `-auto-ilp32` `-qopt-mem-layout-trans=3`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revD.xml