



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Bull SAS bullion S16 (E7-8890 v4)	SPECint®_rate2006 = 14100
	SPECint_rate_base2006 = 13600

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

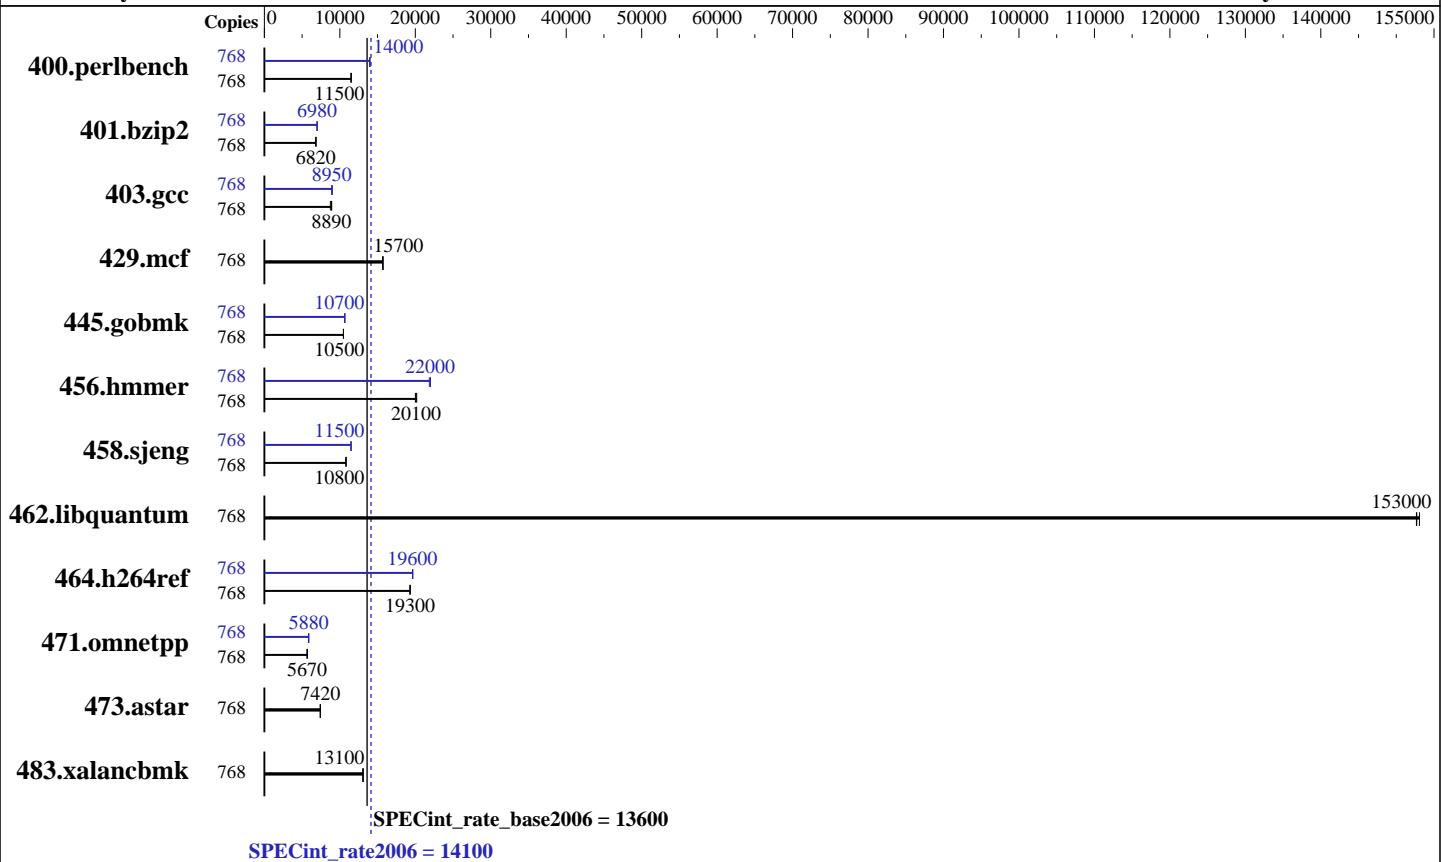

Hardware		Software	
CPU Name:	Intel Xeon E7-8890 v4	Operating System:	SUSE Linux Enterprise Server 11 SP4 (x86_64) 3.0.101-63-default
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz	Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
CPU MHz:	2200	Auto Parallel:	No
FPU:	Integrated	File System:	tmpfs
CPU(s) enabled:	384 cores, 16 chips, 24 cores/chip, 2 threads/core	System State:	Run level 3 (multi-user)
CPU(s) orderable:	2, 4, 8, 16 chip	Base Pointers:	32-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software:	Microquill SmartHeap V10.2
L3 Cache:	60 MB I+D on chip per chip		
Other Cache:	None		
Memory:	4 TB (128 x 32 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)		
Disk Subsystem:	HDD 1.2 TB LSI MR9363-4i		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Bull SAS

bullion S16 (E7-8890 v4)

SPECint_rate2006 = 14100

SPECint_rate_base2006 = 13600

CPU2006 license: 20

Test date: Jun-2016

Test sponsor: Bull SAS

Hardware Availability: Jun-2016

Tested by: Bull SAS

Software Availability: Mar-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	768	653	11500	653	11500	653	11500	768	538	14000	537	14000	536	14000
401.bzip2	768	1084	6840	1086	6820	1087	6820	768	1061	6980	1060	6990	1061	6980
403.gcc	768	693	8920	696	8890	707	8740	768	693	8920	691	8950	687	9000
429.mcf	768	446	15700	446	15700	446	15700	768	446	15700	446	15700	446	15700
445.gobmk	768	769	10500	769	10500	769	10500	768	756	10700	756	10700	756	10700
456.hammer	768	355	20200	357	20100	358	20000	768	326	22000	326	22000	328	21900
458.sjeng	768	859	10800	859	10800	859	10800	768	810	11500	809	11500	809	11500
462.libquantum	768	104	153000	104	153000	104	153000	768	104	153000	104	153000	104	153000
464.h264ref	768	880	19300	881	19300	880	19300	768	865	19600	865	19600	864	19700
471.omnetpp	768	847	5670	845	5680	847	5670	768	815	5890	821	5840	817	5880
473.astar	768	727	7420	727	7420	727	7410	768	727	7420	727	7420	727	7410
483.xalancbmk	768	406	13000	405	13100	405	13100	768	406	13000	405	13100	405	13100

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

SPEC files placed in /specRam, with /specRam mounted as tmpfs with mpol=interleave, size=1536G
Stack size set to unlimited using "ulimit -s unlimited"
Turbo mode set with:
cpupower -c all frequency-set -g performance

Platform Notes

BIOS configuration:
Set Efficiency Policy to Performance
Set Memory RAS mode to Performance
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /specRam/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on jane Thu Jun 23 18:37:19 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Bull SAS

bullion S16 (E7-8890 v4)

SPECint_rate2006 = 14100

SPECint_rate_base2006 = 13600

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz
  16 "physical id"s (chips)
    768 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 8: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 9: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 10: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 11: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 12: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 13: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 14: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 15: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
cache size : 61440 KB

From /proc/meminfo
  MemTotal:        4235820300 kB
  HugePages_Total:      0
  Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*
  SuSE-release:
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Bull SAS

bullion S16 (E7-8890 v4)

SPECint_rate2006 = 14100

SPECint_rate_base2006 = 13600

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

Platform Notes (Continued)

```
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 4
os-release:
  NAME="SLES"
  VERSION="11.4"
  VERSION_ID="11.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 11 SP4"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:11:4"

uname -a:
Linux jane 3.0.101-63-default #1 SMP Tue Jun 23 16:02:31 UTC 2015 (4b89d0c)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 23 11:45 last=S

SPEC is set to: /specRam
Filesystem      Type   Size  Used Avail Use% Mounted on
  none          tmpfs  1.5T  3.8G  1.5T   1% /specRam
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Bull INX10.038.00.102 06/16/2016
Memory:
 256x NO DIMM Unknown
 128x Samsung M393A4K40BB0-CPB 32 GB 2 rank , configured at 1600 MHz

(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/specRam/libs/32:/specRam/libs/64:/specRam/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
memory using RedHat EL 7.1
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Bull SAS bullion S16 (E7-8890 v4)	SPECint_rate2006 = 14100 SPECint_rate_base2006 = 13600
--	---

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmr: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Bull SAS bullion S16 (E7-8890 v4)	SPECint_rate2006 = 14100
	SPECint_rate_base2006 = 13600

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
 403.gcc: -D_FILE_OFFSET_BITS=64
 429.mcf: -D_FILE_OFFSET_BITS=64
 445.gobmk: -D_FILE_OFFSET_BITS=64
 456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
 458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
 462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
 464.h264ref: -D_FILE_OFFSET_BITS=64
 471.omnetpp: -D_FILE_OFFSET_BITS=64
 473.astar: -D_FILE_OFFSET_BITS=64
 483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
 401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
 -auto-ilp32 -ansi-alias
 403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div
 429.mcf: basepeak = yes
 445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
 -opt-mem-layout-trans=3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Bull SAS bullion S16 (E7-8890 v4)	SPECint_rate2006 = 14100 SPECint_rate_base2006 = 13600
CPU2006 license: 20	Test date: Jun-2016
Test sponsor: Bull SAS	Hardware Availability: Jun-2016
Tested by: Bull SAS	Software Availability: Mar-2016

Peak Optimization Flags (Continued)

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Bull-BullionS-Flags-V2.2.html>
<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Bull-BullionS-Flags-V2.2.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 14100

bullion S16 (E7-8890 v4)

SPECint_rate_base2006 = 13600

CPU2006 license: 20

Test date: Jun-2016

Test sponsor: Bull SAS

Hardware Availability: Jun-2016

Tested by: Bull SAS

Software Availability: Mar-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jan 11 10:34:30 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 January 2017.