SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECfp®_rate2006 = 1040

SPECfp_rate_base2006 = 1010

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Jan-2017
Hardware Availability: Mar-2016
Software Availability: Sep-2016

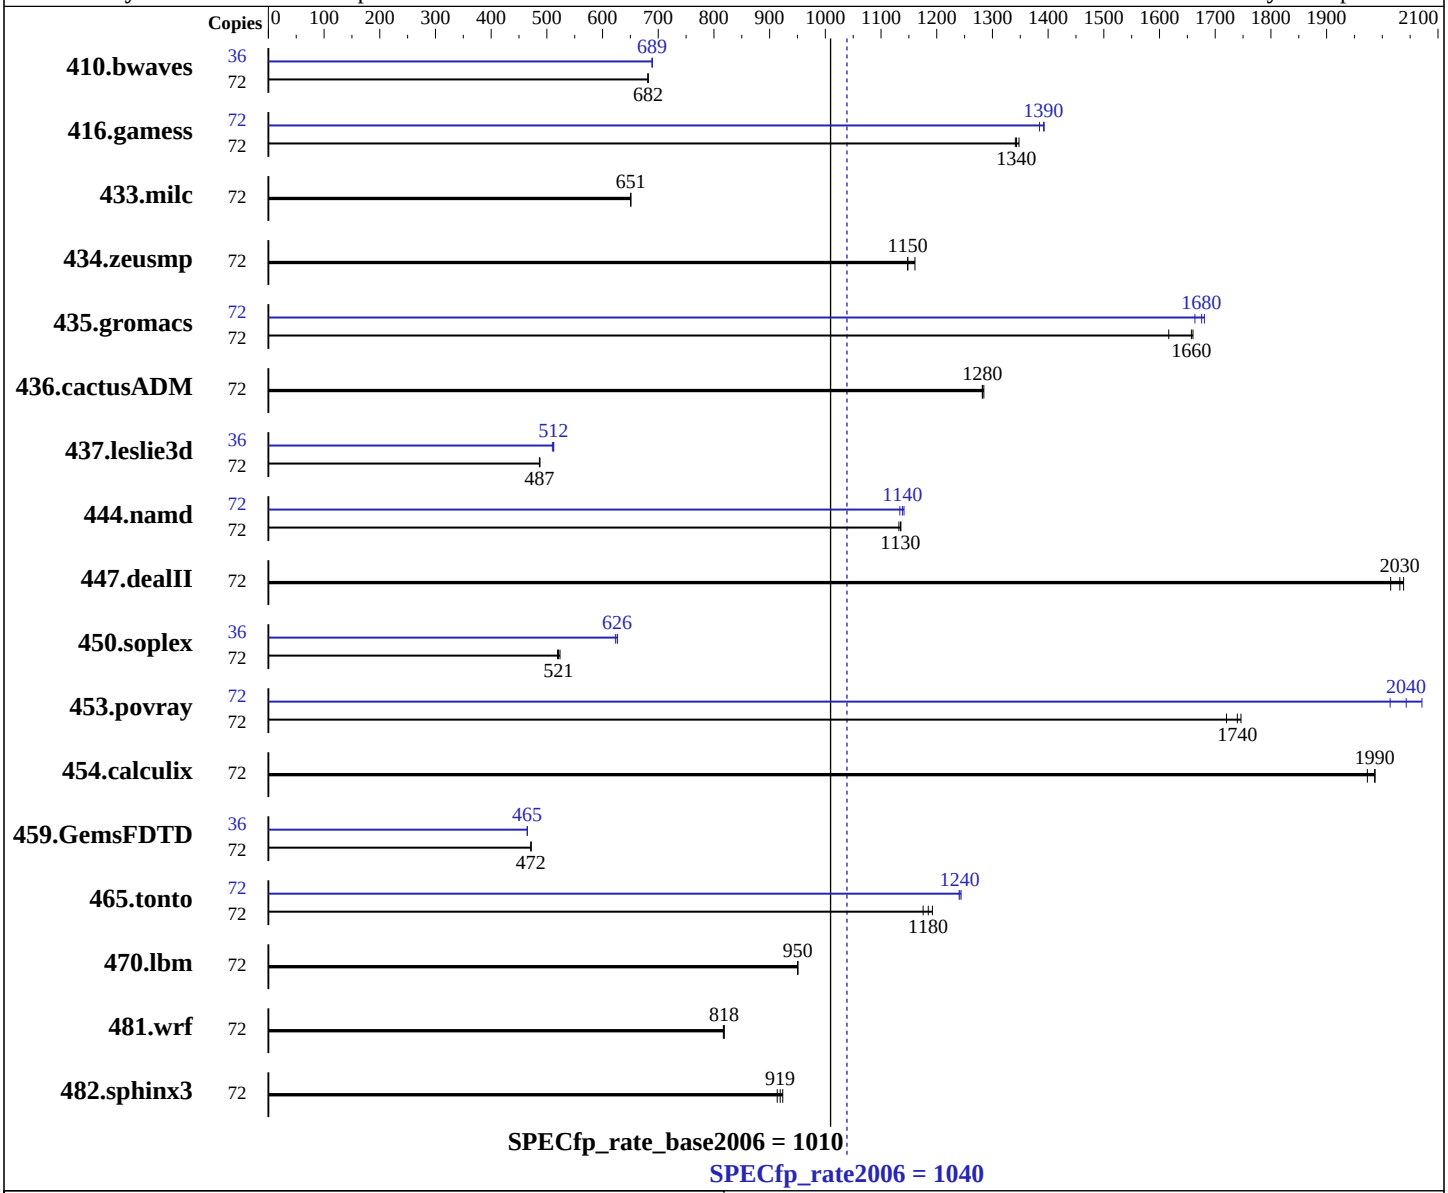

Hardware

CPU Name:	Intel Xeon E5-2697 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	36 cores, 2 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) Kernel 3.12.49-11-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECfp_rate2006 = 1040

SPECfp_rate_base2006 = 1010

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Jan-2017
Hardware Availability: Mar-2016
Software Availability: Sep-2016

L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	72	1436	682	1435	682	**1435**	**682**	36	709	690	710	689	**710**	**689**
416.gamess	72	**1049**	**1340**	1046	1350	1051	1340	72	**1013**	**1390**	1012	1390	1018	1380
433.milc	72	1017	650	**1016**	**651**	1015	651	72	1017	650	**1016**	**651**	1015	651
434.zeusmp	72	571	1150	**571**	**1150**	564	1160	72	571	1150	**571**	**1150**	564	1160
435.gromacs	72	318	1620	**310**	**1660**	310	1660	72	306	1680	**307**	**1680**	309	1660
436.cactusADM	72	671	1280	**671**	**1280**	670	1280	72	671	1280	**671**	**1280**	670	1280
437.leslie3d	72	1388	488	1391	487	**1390**	**487**	36	**661**	**512**	664	510	661	512
444.namd	72	**509**	**1130**	508	1140	510	1130	72	509	1130	506	1140	**507**	**1140**
447.dealII	72	409	2020	**405**	**2030**	404	2040	72	409	2020	**405**	**2030**	404	2040
450.soplex	72	1157	519	1147	524	**1153**	**521**	36	479	627	**479**	**626**	482	623
453.povray	72	**220**	**1740**	223	1720	219	1750	72	190	2010	**187**	**2040**	185	2070
454.calculix	72	299	1990	**299**	**1990**	301	1970	72	299	1990	**299**	**1990**	301	1970
459.GemsFDTD	72	1620	472	**1620**	**472**	1621	471	36	822	465	**822**	**465**	821	465
465.tonto	72	594	1190	**598**	**1180**	603	1180	72	571	1240	**571**	**1240**	570	1240
470.lbm	72	1041	950	**1041**	**950**	1041	950	72	1041	950	**1041**	**950**	1041	950
481.wrf	72	**983**	**818**	984	817	983	818	72	**983**	**818**	984	817	983	818
482.sphinx3	72	1536	914	**1527**	**919**	1519	924	72	1536	914	**1527**	**919**	1519	924

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
```

Platform Notes

```
 BIOS Configuration:
  Cluster On Die set to Enabled
  Early Snoop set to Disabled
  Performance Profile set to Custom
  C1E Support set to Disabled
  Core C3 set to Disabled
  Core C6 set to Disabled
  CPU Performance and Energy Bias set to Disabled
  Thermal Profile set to High Fan Speed
  Memory Power Savings set to Disabled
  Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993
  Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
  running on RD550-02 Sat Jan 21 01:57:31 2017

  This section contains SUT (System Under Test) info as seen by
  some common utilities.  To remove or add to this section, see:
    http://www.spec.org/cpu2006/Docs/config.html#sysinfo

  From /proc/cpuinfo
     model name : Intel(R) Xeon(R) CPU E5-2697 v4 @ 2.30GHz
        2 "physical id"s (chips)
        72 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 18
        siblings  : 36
        physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
        physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
     cache size : 23040 KB

  From /proc/meminfo
     MemTotal:       264553592 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 1
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP1"
        VERSION_ID="12.1"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

Continued on next page

Platform Notes (Continued)

```
uname -a:
   Linux RD550-02 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
   (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 20 14:34

SPEC is set to: /home/cpu2006-1.2-ic17.0
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   689G   23G  666G   4% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS LENOVO PB1TS362 03/24/2016
  Memory:
   16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz
   8x NO DIMM NO DIMM

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-malloc-options=3 -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -auto -inline-calloc -qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32 -qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-C.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-C.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 7 17:00:49 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 February 2017.