SPEC® CFP2006 Result

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8894 v4, 2.40 GHz)

SPECfp®2006 = Not Run

SPECfp_base2006 = 118

CPU2006 license: 9017		**Test date:**	Jan-2017
Test sponsor:	Lenovo Group Limited	**Hardware Availability:**	Feb-2017
Tested by:	Lenovo Group Limited	**Software Availability:**	Sep-2016

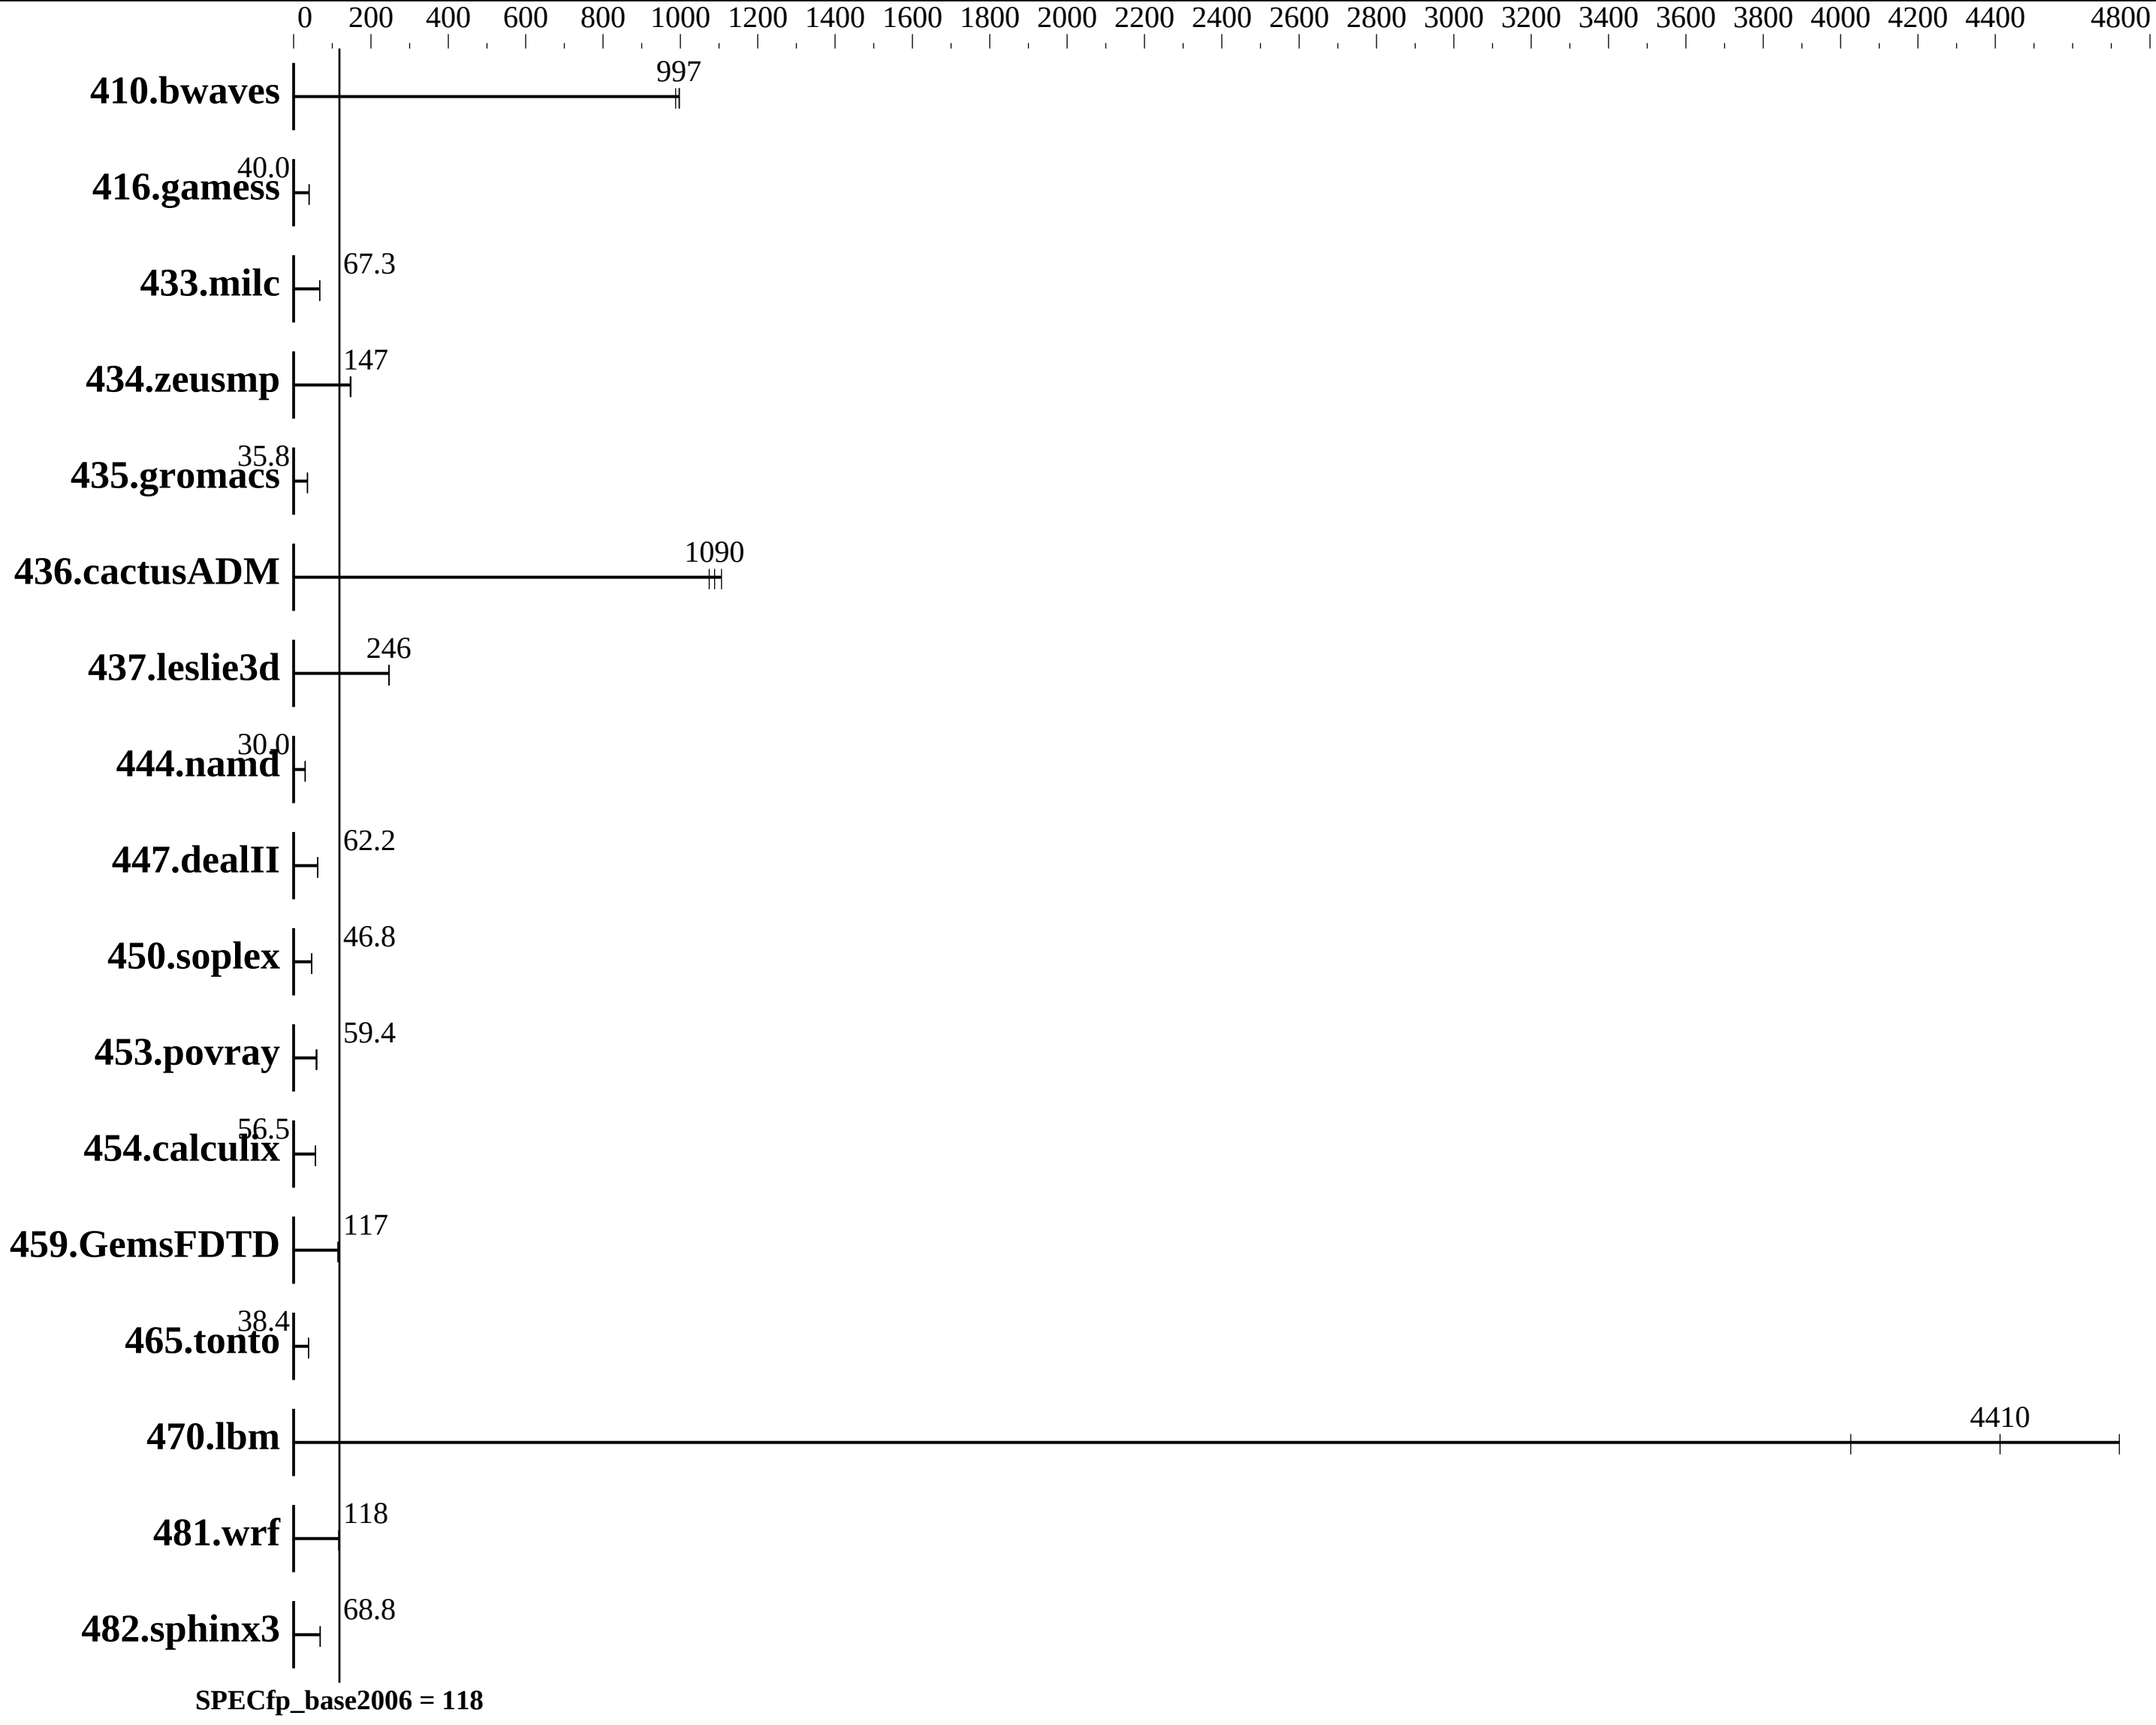

Hardware

CPU Name:	Intel Xeon E7-8894 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	192 cores, 8 chips, 24 cores/chip
CPU(s) orderable:	4,8 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) Kernel 3.12.49-11-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	btrfs
System State:	Run level 3 (multi-user)

Continued on next page

L3 Cache: 60 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other Software: None

Results Table

Benchmark	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio
410.bwaves	13.6	998	13.8	988	**13.6**	**997**						
416.gamess	**490**	**40.0**	491	39.8	489	40.0						
433.milc	137	67.2	**136**	**67.3**	136	67.5						
434.zeusmp	62.2	146	**61.9**	**147**	61.4	148						
435.gromacs	199	35.9	199	35.8	**199**	**35.8**						
436.cactusADM	10.8	1110	11.1	1070	**11.0**	**1090**						
437.leslie3d	**38.1**	**246**	38.2	246	38.0	247						
444.namd	268	30.0	268	30.0	**268**	**30.0**						
447.dealII	184	62.2	**184**	**62.2**	184	62.2						
450.soplex	178	46.8	**178**	**46.8**	178	46.8						
453.povray	91.4	58.2	**89.5**	**59.4**	88.5	60.1						
454.calculix	146	56.5	146	56.6	**146**	**56.5**						
459.GemsFDTD	90.6	117	**90.8**	**117**	93.0	114						
465.tonto	258	38.2	**257**	**38.4**	256	38.4						
470.lbm	**3.11**	**4410**	3.41	4030	2.91	4720						
481.wrf	95.9	116	94.2	119	**94.7**	**118**						
482.sphinx3	284	68.6	**283**	**68.8**	283	69.0						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages disabled with:
echo never > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

```
BIOS configuration:
Memory Mode set to Independent
Operating Mode set to Maximum Performance
Hyper-Threading set to Disable
 Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on Draco-8S Sun Jan 22 08:05:36 2017
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-8894 v4 @ 2.40GHz
      8 "physical id"s (chips)
      192 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 24
      siblings  : 24
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
      27 28 29
      physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
      27 28 29
      physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
      27 28 29
      physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
      27 28 29
      physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
      27 28 29
      physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
      27 28 29
      physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
      27 28 29
      physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
      27 28 29
   cache size : 61440 KB

From /proc/meminfo
   MemTotal:       1058550028 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 1
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP1"
      VERSION_ID="12.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
      ID="sles"
      ANSI_COLOR="0;32"
```

Continued on next page

Platform Notes (Continued)

```
       CPE_NAME="cpe:/o:suse:sles:12:sp1"

 uname -a:
    Linux Draco-8S 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
    (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Jan 22 05:32

 SPEC is set to: /home/cpu2006-1.2-ic17.0
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/sda2      btrfs  744G   30G  710G   5% /home
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS IBM -[A9E135LUS-3.11]- 11/18/2016
   Memory:
    47x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1600 MHz
    17x Hynix HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz, configured at 1600 MHz
    128x NO DIMM Unknown

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"
OMP_NUM_THREADS = "192"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
    icc -m64

C++ benchmarks:
    icpc -m64

Fortran benchmarks:
    ifort -m64

Benchmarks using both Fortran and C:
    icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-D.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-D.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 7 17:01:00 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 February 2017.