SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

Kunlun 9008 (Intel Xeon E7-4850 v3)

SPECfp®_rate2006 = 3050

SPECfp_rate_base2006 = 2990

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Dec-2016
Hardware Availability: Jan-2016
Software Availability: Sep-2014

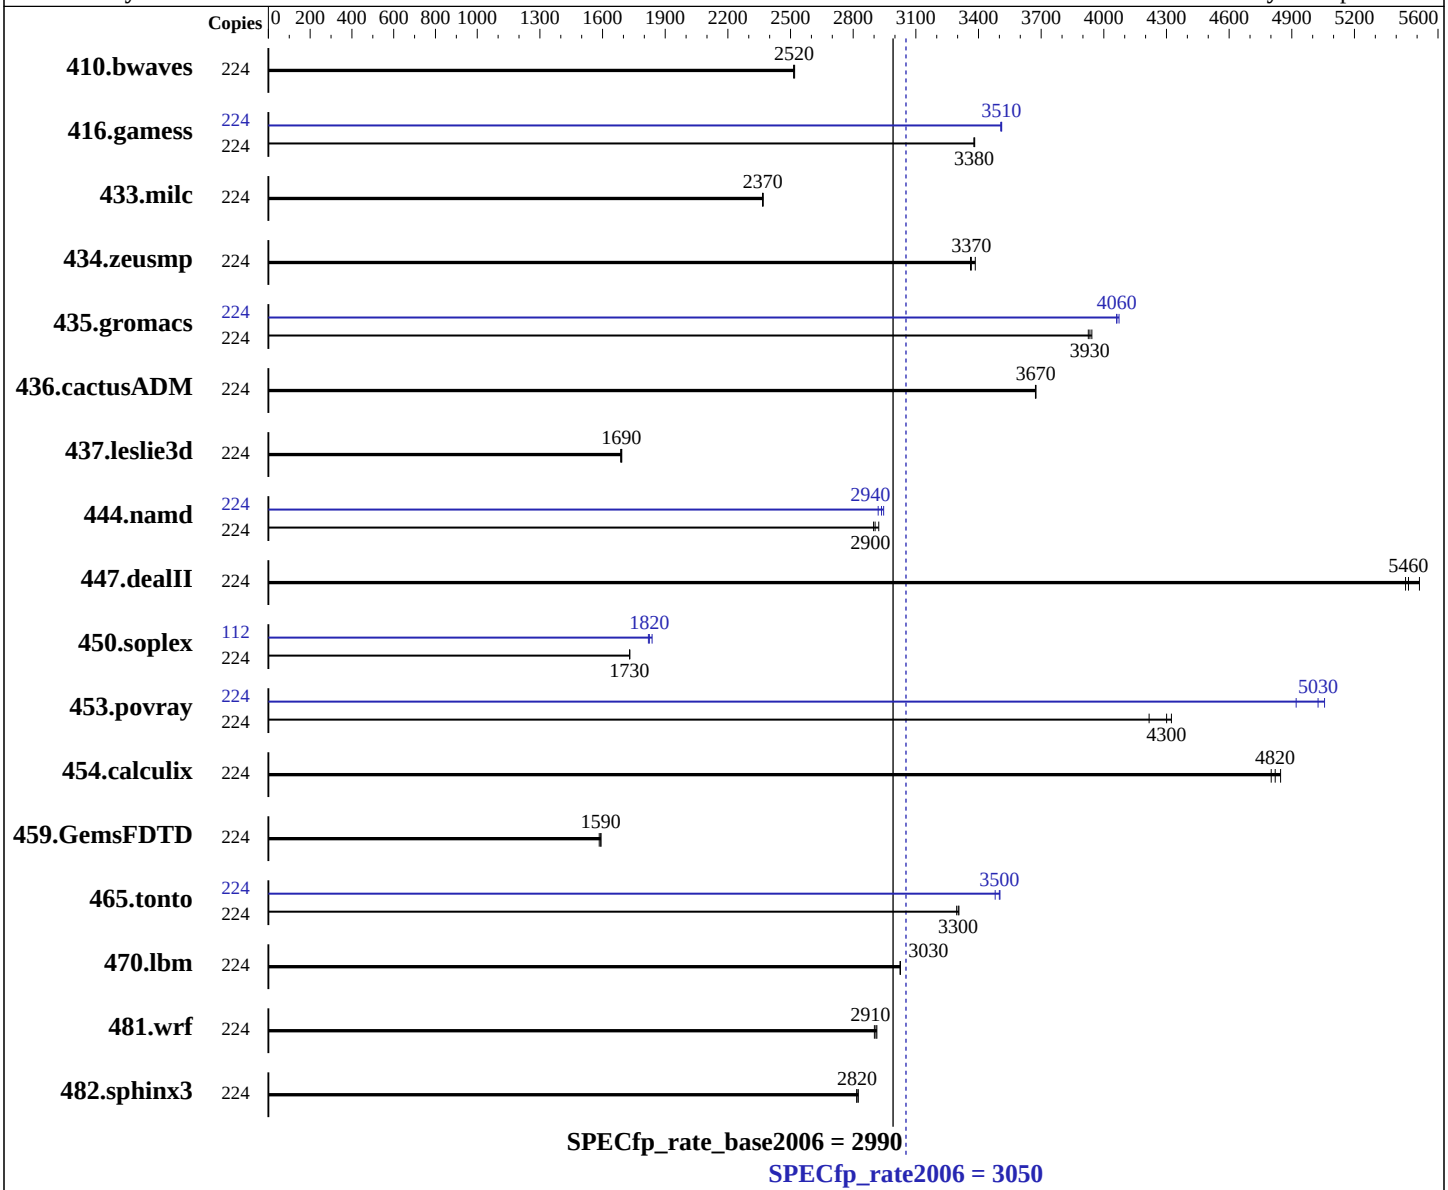

Hardware

CPU Name:	Intel Xeon E7-4850 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	112 cores, 8 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable:	4,8 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.1 (Maipo) 3.10.0-229.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

Kunlun 9008 (Intel Xeon E7-4850 v3)

SPECfp_rate2006 = 3050

SPECfp_rate_base2006 = 2990

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Dec-2016
Hardware Availability: Jan-2016
Software Availability: Sep-2014

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)
Disk Subsystem: 2 x 600 GB SAS, 10K RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	224	1210	2510	**1210**	**2520**	1208	2520	224	1210	2510	**1210**	**2520**	1208	2520
416.gamess	224	**1298**	**3380**	1297	3380	1298	3380	224	1251	3510	**1250**	**3510**	1249	3510
433.milc	224	868	2370	869	2370	**869**	**2370**	224	868	2370	869	2370	**869**	**2370**
434.zeusmp	224	**606**	**3370**	602	3380	606	3360	224	**606**	**3370**	602	3380	606	3360
435.gromacs	224	407	3930	406	3940	**407**	**3930**	224	394	4060	393	4070	**394**	**4060**
436.cactusADM	224	729	3670	**729**	**3670**	728	3670	224	729	3670	**729**	**3670**	728	3670
437.leslie3d	224	1248	1690	**1246**	**1690**	1244	1690	224	1248	1690	**1246**	**1690**	1244	1690
444.namd	224	615	2920	620	2900	**618**	**2900**	224	615	2920	610	2950	**612**	**2940**
447.dealII	224	471	5440	**469**	**5460**	465	5510	224	471	5440	**469**	**5460**	465	5510
450.soplex	224	**1080**	**1730**	1080	1730	1079	1730	112	**512**	**1820**	513	1820	508	1840
453.povray	224	**277**	**4300**	276	4320	283	4220	224	242	4920	**237**	**5030**	236	5060
454.calculix	224	381	4850	385	4800	**383**	**4820**	224	381	4850	385	4800	**383**	**4820**
459.GemsFDTD	224	1500	1580	1493	1590	**1493**	**1590**	224	1500	1580	1493	1590	**1493**	**1590**
465.tonto	224	669	3300	667	3310	**667**	**3300**	224	633	3480	**630**	**3500**	629	3500
470.lbm	224	1017	3030	1017	3020	**1017**	**3030**	224	1017	3030	1017	3020	**1017**	**3030**
481.wrf	224	**860**	**2910**	862	2900	859	2910	224	**860**	**2910**	862	2900	859	2910
482.sphinx3	224	1550	2820	**1549**	**2820**	1546	2820	224	1550	2820	**1549**	**2820**	1546	2820

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Turbo mode set with:
 cpupower -c all frequency-set -g performance
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Performance
Set Lock_step to disabled
Baseboard Management Controller used to adjust the fan speed to 100%
Set C-State to C0/C1
Sysinfo program /home/spec/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Sat Dec 10 10:56:15 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-4850 v3 @ 2.20GHz
      8 "physical id"s (chips)
      224 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 14
      siblings  : 28
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
   cache size : 35840 KB

From /proc/meminfo
   MemTotal:       1055991488 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.1 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.1"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

uname -a:
```

Continued on next page

Platform Notes (Continued)

```
     Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
     EST 2015 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Dec 10 10:55

  SPEC is set to: /home/spec
     Filesystem            Type  Size  Used Avail Use% Mounted on
     /dev/mapper/rhel-home xfs   1.1T   52G 1009G   5% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS American Megatrends Inc. BLXSV106 08/13/2016
    Memory:
     1x Hynix HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz, configured at 1333 MHz
     63x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1333 MHz
     128x NO DIMM NO DIMM

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/spec/libs/32:/home/spec/libs/64:/home/spec/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc   -m64
```

C++ benchmarks:

```
icpc  -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-HSW-RevG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-HSW-RevG.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Mar 7 16:14:12 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 March 2017.