SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS460
(3.50 GHz, Intel Xeon E3-1240 v5)

SPECint®2006 = 72.1

SPECint_base2006 = 70.1

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Feb-2017
Hardware Availability: Feb-2017
Software Availability: May-2016

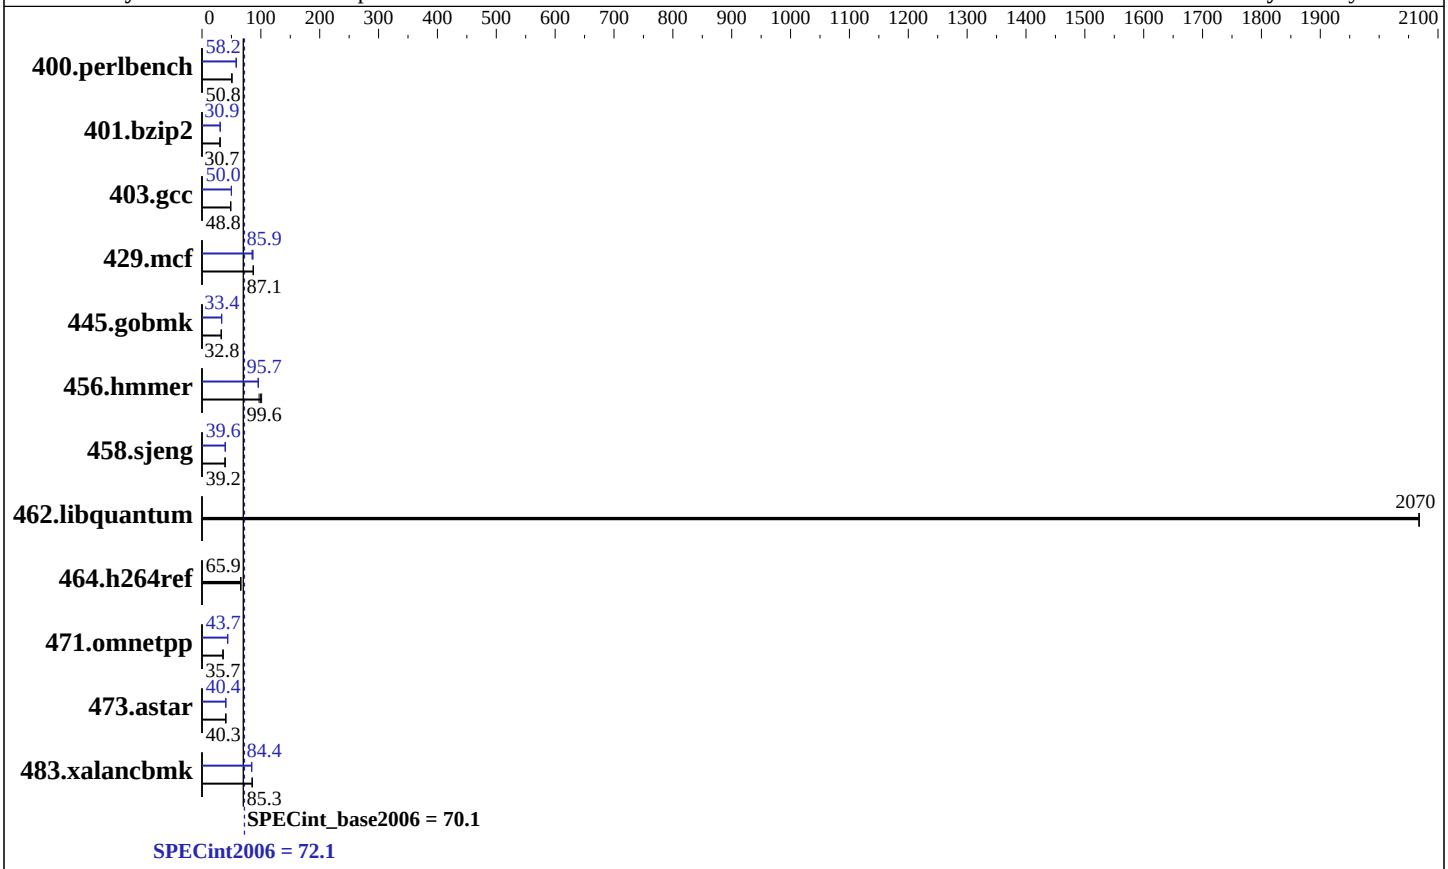

Hardware

CPU Name:	Intel Xeon E3-1240 v5
CPU Characteristics:	Intel Turbo Boost Technology up to 3.90 GHz
CPU MHz:	3500
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (2 x 8 GB 2Rx8 PC4-2133P-E)
Disk Subsystem:	1 x 800 GB SATA SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.8 (Santiago) Kernel 2.6.32-642.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS460
(3.50 GHz, Intel Xeon E3-1240 v5)

SPECint2006 = 72.1

SPECint_base2006 = 70.1

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Feb-2017
Hardware Availability: Feb-2017
Software Availability: May-2016

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	192	50.8	**192**	**50.8**	193	50.7	**168**	**58.2**	168	58.2	168	58.1
401.bzip2	**315**	**30.7**	315	30.6	314	30.7	312	30.9	311	31.0	**312**	**30.9**
403.gcc	165	48.8	**165**	**48.8**	166	48.6	161	50.0	**161**	**50.0**	161	49.9
429.mcf	105	87.0	**105**	**87.1**	104	87.3	**106**	**85.9**	107	85.0	105	86.7
445.gobmk	**320**	**32.8**	321	32.7	320	32.8	314	33.4	**314**	**33.4**	315	33.4
456.hmmer	92.1	101	**93.7**	**99.6**	96.2	97.0	97.8	95.4	**97.4**	**95.7**	97.4	95.8
458.sjeng	308	39.2	**308**	**39.2**	309	39.2	**306**	**39.6**	306	39.6	306	39.5
462.libquantum	10.0	2070	10.0	2070	**10.0**	**2070**	10.0	2070	10.0	2070	**10.0**	**2070**
464.h264ref	**336**	**65.9**	336	65.8	336	65.9	**336**	**65.9**	336	65.8	336	65.9
471.omnetpp	174	35.9	175	35.7	**175**	**35.7**	143	43.7	**143**	**43.7**	144	43.4
473.astar	173	40.7	174	40.3	**174**	**40.3**	174	40.3	**174**	**40.4**	174	40.5
483.xalancbmk	**80.9**	**85.3**	80.7	85.5	81.0	85.2	81.8	84.3	**81.8**	**84.4**	81.7	84.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

```
BIOS Configuration:
 Boot performance mode set to Turbo Performance
 Hyper-Threading set to Disabled
 CPU C3 State Support set to Disabled
 CPU C6 State Support set to Disabled
 CPU C7 State Support set to Enabled
 Package C State Support  set to C7
 No-Execute Memory Protection set to Disabled
 Intel Virtualization Technology set to Disabled
 CPU Thermal Throtting set to Disabled
 Sysinfo program /home/cpu2006-ic14/config/sysinfo.rev6818
 $Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
 running on TS460-01 Wed Feb 15 03:20:47 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo
```

Continued on next page

Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E3-1240 v5 @ 3.50GHz
      1 "physical id"s (chips)
      4 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 4
      siblings  : 4
      physical 0: cores 0 1 2 3
   cache size : 8192 KB

From /proc/meminfo
   MemTotal:       16274480 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.8 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.8 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.8 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux TS460-01 2.6.32-642.el6.x86_64 #1 SMP Wed Apr 13 00:51:26 EDT 2016
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 15 02:47

SPEC is set to: /home/cpu2006-ic14
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda1      ext4   50G   17G   31G  36% /

Additional information from dmidecode:
  BIOS LENOVO TB1TS100 11/26/2016
  Memory:
   2x   8 GB
   2x Not Specified Not Specified
   2x Samsung M391A1G43EB1-CPB 8 GB 2133 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2006-ic14/libs/32:/home/cpu2006-ic14/libs/64:/home/cpu2006-ic14/sh"
OMP_NUM_THREADS = "4"
```

Continued on next page

General Notes (Continued)

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -ansi-alias`

401.bzip2: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div -prof-use`(pass 2) `-auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32`

429.mcf: `-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

445.gobmk: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Mar 7 16:14:30 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 March 2017.