SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS460
(3.60 GHz, Intel Xeon E3-1270 v5)

SPECfp®2006 = 97.4

SPECfp_base2006 = 95.4

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Feb-2017
Hardware Availability: Feb-2017
Software Availability: May-2016

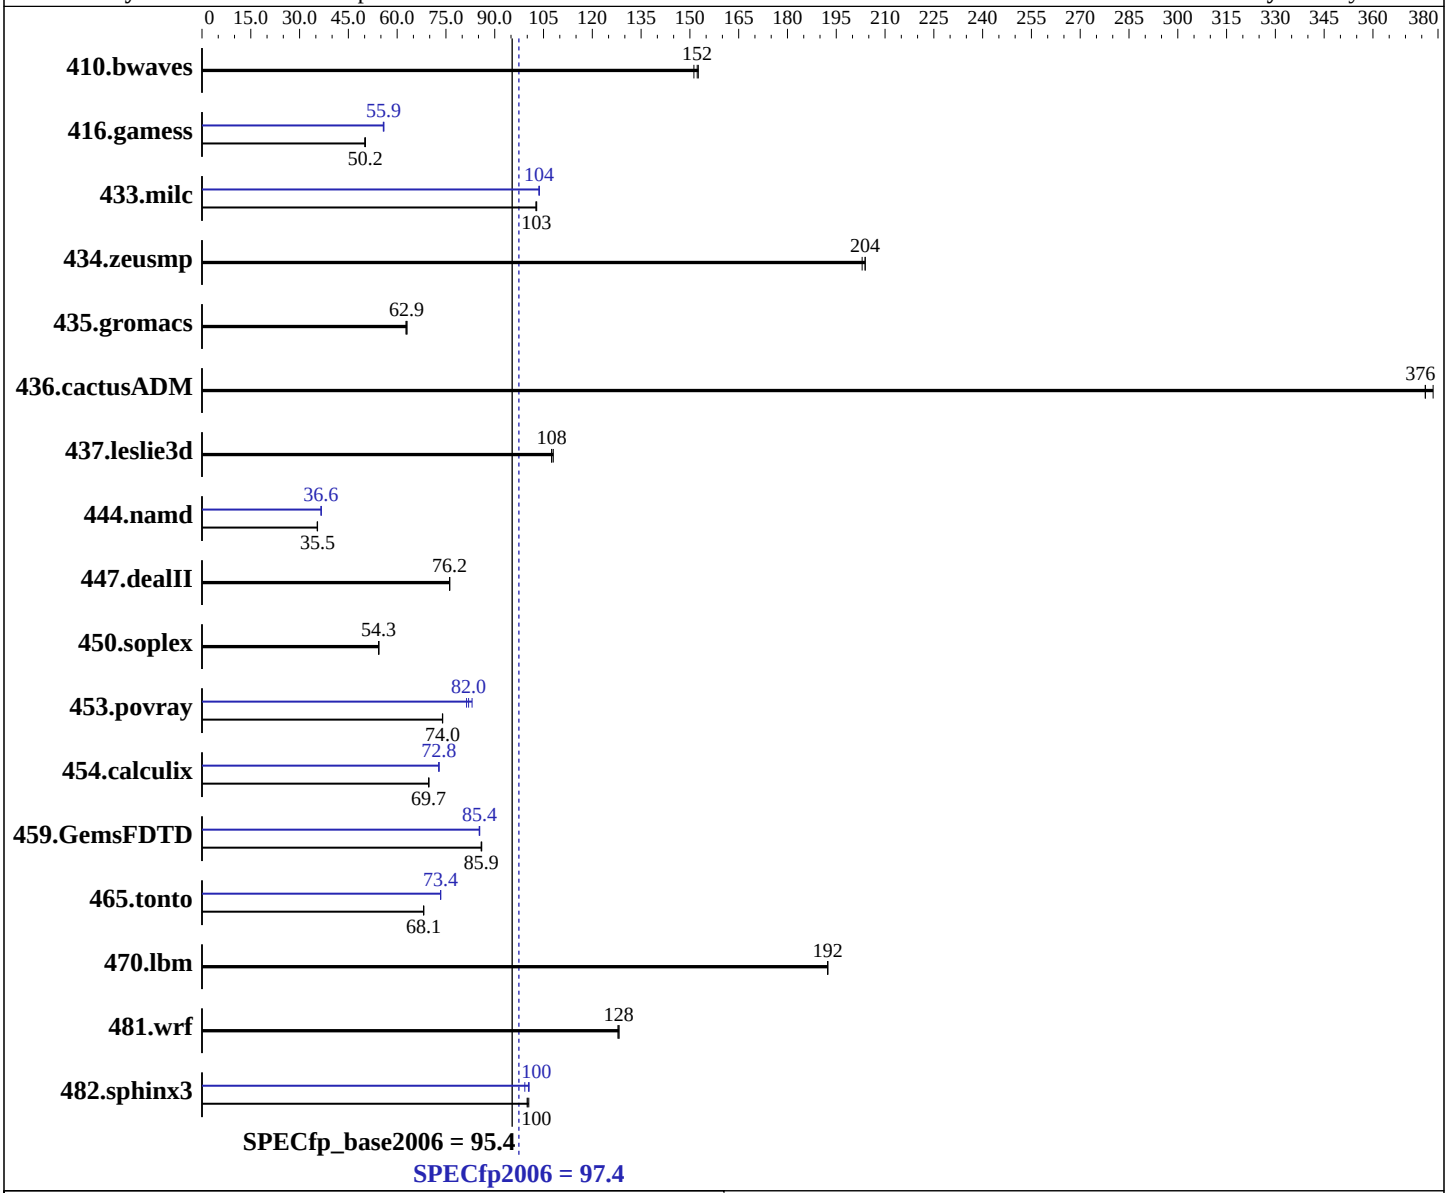

Hardware

CPU Name:	Intel Xeon E3-1270 v5
CPU Characteristics:	Intel Turbo Boost Technology up to 4.00 GHz
CPU MHz:	3600
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.8 (Santiago) Kernel 2.6.32-642.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS460
(3.60 GHz, Intel Xeon E3-1270 v5)

SPECfp2006 = 97.4

SPECfp_base2006 = 95.4

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Feb-2017
Hardware Availability: Feb-2017
Software Availability: May-2016

L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (2 x 8 GB 2Rx8 PC4-2133P-E)
Disk Subsystem:	1 x 800 GB SATA SSD
Other Hardware:	None

System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**89.3**	**152**	89.1	153	89.9	151	**89.3**	**152**	89.1	153	89.9	151
416.gamess	391	50.0	390	50.3	**390**	**50.2**	**350**	**55.9**	350	55.9	351	55.7
433.milc	**89.4**	**103**	89.2	103	89.4	103	**88.5**	**104**	88.5	104	88.6	104
434.zeusmp	44.6	204	**44.6**	**204**	44.8	203	44.6	204	**44.6**	**204**	44.8	203
435.gromacs	114	62.7	**113**	**62.9**	113	63.0	114	62.7	**113**	**62.9**	113	63.0
436.cactusADM	31.8	376	**31.8**	**376**	31.6	378	31.8	376	**31.8**	**376**	31.6	378
437.leslie3d	87.4	108	**87.4**	**108**	87.0	108	87.4	108	**87.4**	**108**	87.0	108
444.namd	226	35.5	**226**	**35.5**	227	35.4	219	36.7	219	36.6	**219**	**36.6**
447.dealII	**150**	**76.2**	150	76.2	150	76.1	**150**	**76.2**	150	76.2	150	76.1
450.soplex	154	54.3	153	54.3	**153**	**54.3**	154	54.3	153	54.3	**153**	**54.3**
453.povray	**71.9**	**74.0**	71.9	74.0	72.0	73.9	64.1	83.0	65.4	81.3	**64.9**	**82.0**
454.calculix	118	69.7	**118**	**69.7**	118	69.7	113	72.8	**113**	**72.8**	113	72.9
459.GemsFDTD	123	86.0	124	85.9	**124**	**85.9**	**124**	**85.4**	124	85.4	125	85.2
465.tonto	144	68.2	144	68.1	**144**	**68.1**	134	73.3	134	73.4	**134**	**73.4**
470.lbm	71.4	192	71.4	192	**71.4**	**192**	71.4	192	71.4	192	**71.4**	**192**
481.wrf	87.1	128	87.4	128	**87.1**	**128**	87.1	128	87.4	128	**87.1**	**128**
482.sphinx3	194	100	195	100	**195**	**100**	194	101	**194**	**100**	196	99.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages disabled with:
 echo never > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

```
BIOS Configuration:
 Boot performance mode set to Turbo Performance
 Hyper-Threading set to Disabled
 CPU C3 State Support set to Disabled
 CPU C6 State Support set to Disabled
 CPU C7 State Support set to Enabled
 Package C State Support  set to C7
 No-Execute Memory Protection set to Disabled
```

Continued on next page

Platform Notes (Continued)

```
Intel Virtualization Technology set to Disabled
CPU Thermal Throtting set to Disabled
Sysinfo program /home/cpu2006-ic14/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on TS460-01 Fri Feb 17 07:02:51 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E3-1270 v5 @ 3.60GHz
      1 "physical id"s (chips)
      4 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 4
      siblings  : 4
      physical 0: cores 0 1 2 3
   cache size : 8192 KB

From /proc/meminfo
   MemTotal:       16274480 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.8 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.8 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.8 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux TS460-01 2.6.32-642.el6.x86_64 #1 SMP Wed Apr 13 00:51:26 EDT 2016
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 17 02:53

SPEC is set to: /home/cpu2006-ic14
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda1      ext4   50G   17G   31G  36% /

Additional information from dmidecode:
  BIOS LENOVO TB1TS100 11/26/2016
  Memory:
   2x   8 GB
   2x Not Specified Not Specified
   2x Samsung M391A1G43EB1-CPB 8 GB 2133 MHz 2 rank
```

Continued on next page

Platform Notes (Continued)

```
(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2006-ic14/libs/32:/home/cpu2006-ic14/libs/64:/home/cpu2006-ic14/sh"
OMP_NUM_THREADS = "4"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page

Base Portability Flags (Continued)

482.sphinx3: `-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32 -ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Mar 7 16:14:30 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 March 2017.