



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®2006 = 95.3**

PowerEdge R730 (Intel Xeon E5-2623 v4, 2.60 GHz)

**SPECfp\_base2006 = 91.2**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2017

Hardware Availability: Mar-2016

Software Availability: Nov-2016

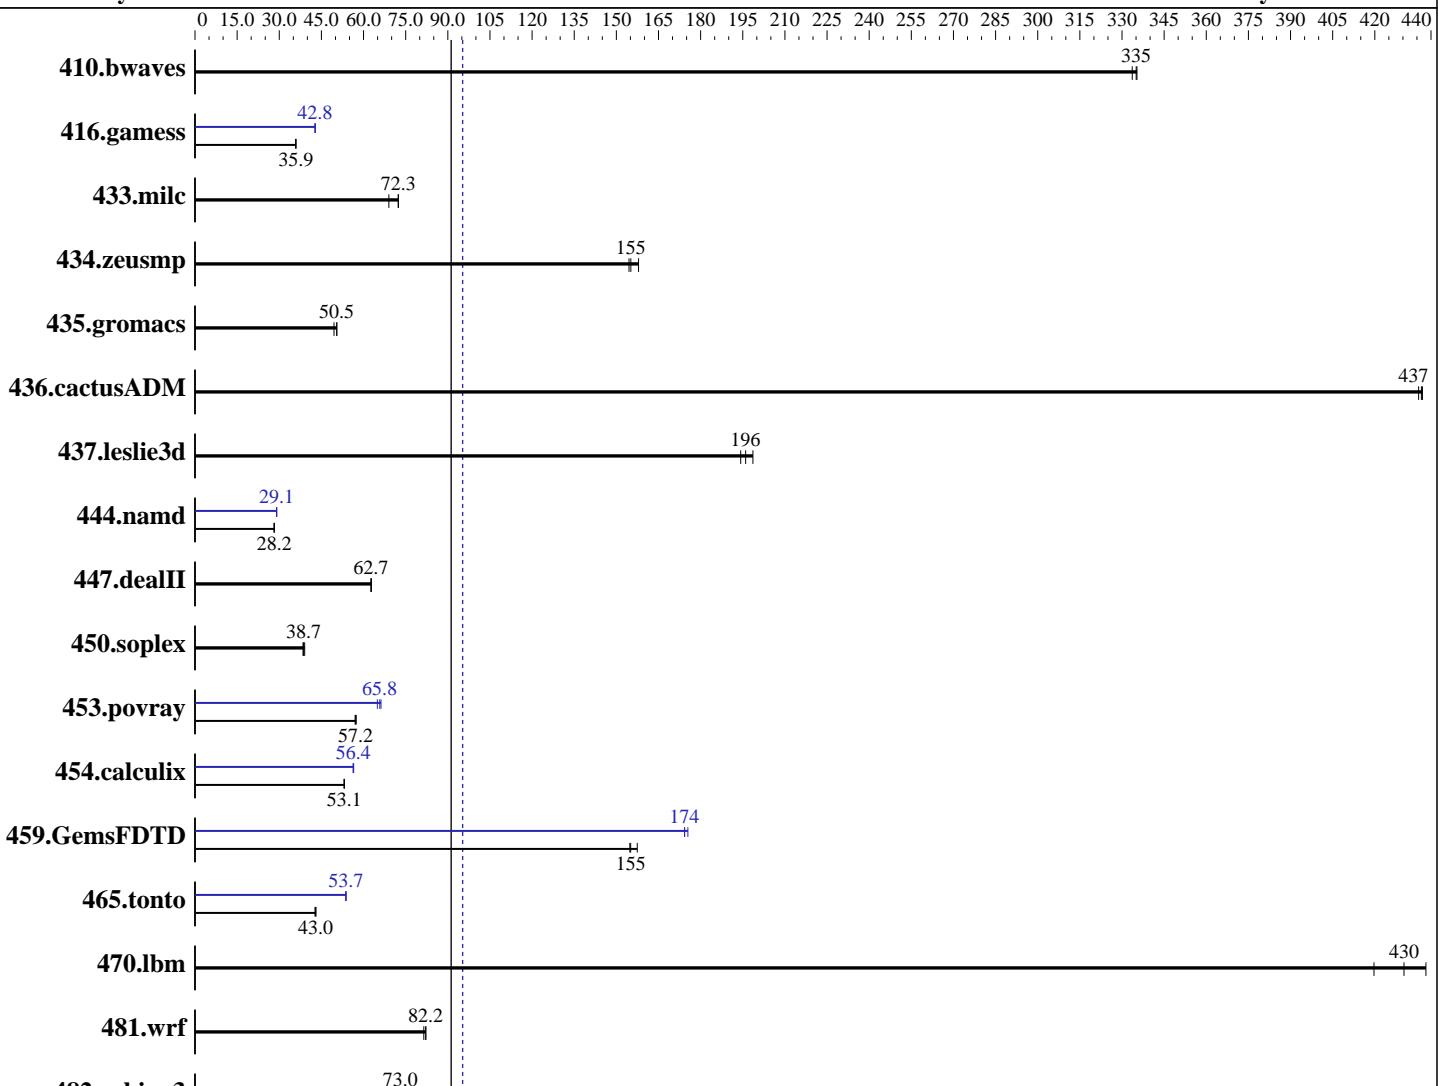

**SPECfp\_base2006 = 91.2**

**SPECfp2006 = 95.3**

## Hardware

CPU Name: Intel Xeon E5-2623 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 3.12.28-4-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 95.3**

PowerEdge R730 (Intel Xeon E5-2623 v4, 2.60 GHz)

**SPECfp\_base2006 = 91.2**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2017

L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R, running at 2133 MHz)  
 Disk Subsystem: 2 x 2000 GB 7200 RPM SAS RAID 0  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	40.5	335	40.7	334	<b>40.6</b>	<b>335</b>	40.5	335	40.7	334	<b>40.6</b>	<b>335</b>
416.gamess	<b>545</b>	<b>35.9</b>	545	35.9	546	35.9	<b>458</b>	<b>42.8</b>	457	42.8	458	42.7
433.milc	127	72.4	<b>127</b>	<b>72.3</b>	133	69.0	127	72.4	<b>127</b>	<b>72.3</b>	133	69.0
434.zeusmp	57.6	158	<b>58.7</b>	<b>155</b>	58.9	154	57.6	158	<b>58.7</b>	<b>155</b>	58.9	154
435.gromacs	<b>141</b>	<b>50.5</b>	141	50.5	144	49.5	<b>141</b>	<b>50.5</b>	141	50.5	144	49.5
436.cactusADM	<b>27.4</b>	<b>437</b>	27.4	436	27.3	437	<b>27.4</b>	<b>437</b>	27.4	436	27.3	437
437.leslie3d	48.4	194	<b>48.0</b>	<b>196</b>	47.3	199	48.4	194	<b>48.0</b>	<b>196</b>	47.3	199
444.namd	285	28.2	<b>284</b>	<b>28.2</b>	284	28.2	<b>276</b>	<b>29.1</b>	<b>276</b>	<b>29.1</b>	276	29.1
447.dealII	182	62.7	182	62.7	<b>182</b>	<b>62.7</b>	182	62.7	182	62.7	<b>182</b>	<b>62.7</b>
450.soplex	217	38.4	214	39.0	<b>216</b>	<b>38.7</b>	217	38.4	214	39.0	<b>216</b>	<b>38.7</b>
453.povray	93.3	57.0	<b>93.0</b>	<b>57.2</b>	92.7	57.4	<b>80.9</b>	<b>65.8</b>	82.0	64.9	80.3	66.2
454.calculix	155	53.1	155	53.1	<b>155</b>	<b>53.1</b>	146	56.5	<b>146</b>	<b>56.4</b>	147	56.3
459.GemsFDTD	<b>68.4</b>	<b>155</b>	68.5	155	67.4	157	60.9	174	60.5	175	<b>60.9</b>	<b>174</b>
465.tonto	<b>229</b>	<b>43.0</b>	230	42.7	229	43.0	183	53.8	183	53.7	<b>183</b>	<b>53.7</b>
470.lbm	31.4	438	<b>31.9</b>	<b>430</b>	32.7	420	<b>31.4</b>	<b>438</b>	<b>31.9</b>	<b>430</b>	32.7	420
481.wrf	136	82.2	137	81.5	<b>136</b>	<b>82.2</b>	136	82.2	137	81.5	<b>136</b>	<b>82.2</b>
482.sphinx3	267	73.0	<b>267</b>	<b>73.0</b>	266	73.2	<b>267</b>	<b>73.0</b>	<b>267</b>	<b>73.0</b>	266	73.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Snoop Mode set to Opportunistic Snoop Broadcast

Virtualization Technology disabled

System Profile set to custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Energy Efficient Turbo disabled

Uncore Frequency set to Dynamic

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 95.3**

PowerEdge R730 (Intel Xeon E5-2623 v4, 2.60 GHz)

**SPECfp\_base2006 = 91.2**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2017

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2016

## Platform Notes (Continued)

```
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-0171 Wed Feb 1 21:21:55 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2623 v4 @ 2.60GHz
        2 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 4
        siblings : 8
        physical 0: cores 0 1 2 3
        physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      264567484 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-0171 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 95.3**

PowerEdge R730 (Intel Xeon E5-2623 v4, 2.60 GHz)

**SPECfp\_base2006 = 91.2**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2017

Hardware Availability: Mar-2016

Software Availability: Nov-2016

## Platform Notes (Continued)

run-level 3 Feb 1 15:41

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used   Avail Use% Mounted on
/dev/sda2        ext4  246G  18G   227G   8% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.3.4 11/08/2016

Memory:

```
7x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz, configured at 2133
MHz
9x 00CE00B300CE M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz, configured at 2133
MHz
8x Not Specified Not Specified
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/root/previous-cpu2006-1.2/1ibs/32:/root/previous-cpu2006-1.2/1ibs/64:/root/previous-cpu2006-1.2/sh10.2"

OMP\_NUM\_THREADS = "20"

The Dell PowerEdge R730 and the PowerEdge R730xd models are electronically equivalent.  
The results have been measured on a Dell PowerEdge R730xd model.

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

```
echo never > /sys/kernel/mm/transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2623 v4, 2.60 GHz)

**SPECfp2006 = 95.3**

**SPECfp\_base2006 = 91.2**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2017

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2016

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 95.3**

PowerEdge R730 (Intel Xeon E5-2623 v4, 2.60 GHz)

**SPECfp\_base2006 = 91.2**

CPU2006 license: 55

Test date: Feb-2017

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Nov-2016

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp2006 = 95.3**

PowerEdge R730 (Intel Xeon E5-2623 v4, 2.60 GHz)

**SPECfp\_base2006 = 91.2**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2017

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2016

## Peak Optimization Flags (Continued)

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 7 16:14:29 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 March 2017.