



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon E5-4610 v4 1.80 GHz)

**SPECint®2006 = 39.4**

**SPECint\_base2006 = 37.9**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Sep-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Sep-2016

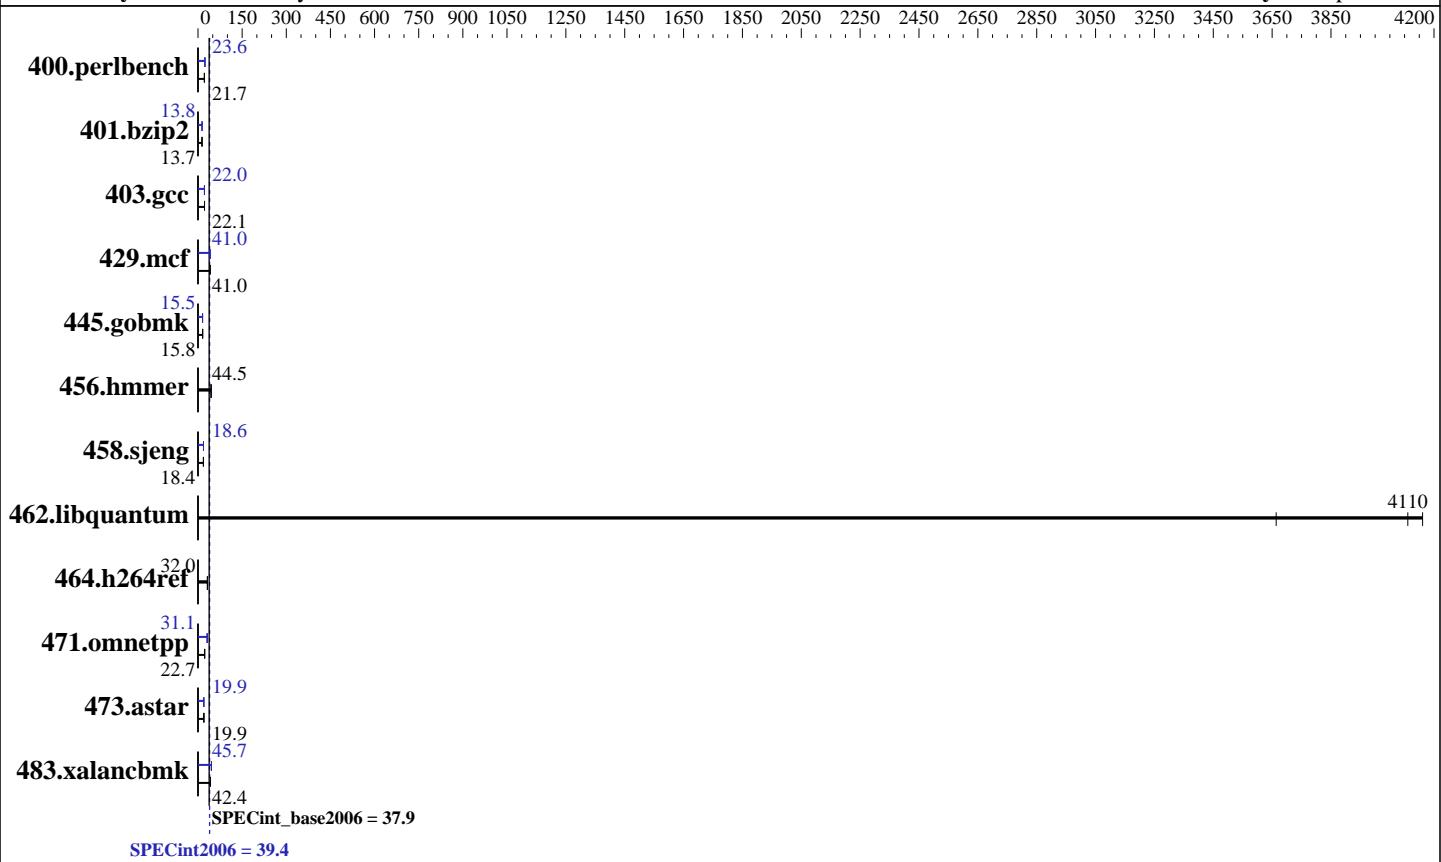

### Hardware

CPU Name:	Intel Xeon E5-4610 v4
CPU Characteristics:	
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	1 TB (32 x 32 GB 2Rx4 PC4-2400T-R, running at 1866 MHz)
Disk Subsystem:	1 x 300 GB SAS, 15K RPM
Other Hardware:	None

### Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon E5-4610 v4 1.80 GHz)

**SPECint2006 = 39.4**

**SPECint\_base2006 = 37.9**

**CPU2006 license:** 9019

**Test date:** Sep-2016

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2016

**Tested by:** Cisco Systems

**Software Availability:** Sep-2016

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	451	21.7	449	21.8	<b>450</b>	<b>21.7</b>	414	23.6	<b>415</b>	<b>23.6</b>	415	23.6
401.bzip2	<b>707</b>	<b>13.7</b>	710	13.6	704	13.7	<b>698</b>	13.8	<b>699</b>	13.8	<b>699</b>	<b>13.8</b>
403.gcc	364	22.1	363	22.2	<b>364</b>	<b>22.1</b>	<b>367</b>	<b>22.0</b>	366	22.0	368	21.9
429.mcf	221	41.3	<b>223</b>	<b>41.0</b>	224	40.7	<b>223</b>	40.8	<b>222</b>	<b>41.0</b>	222	41.1
445.gobmk	<b>665</b>	<b>15.8</b>	665	15.8	665	15.8	<b>676</b>	15.5	<b>676</b>	15.5	<b>676</b>	<b>15.5</b>
456.hammer	<b>210</b>	<b>44.5</b>	210	44.5	210	44.5	<b>210</b>	<b>44.5</b>	210	44.5	210	44.5
458.sjeng	<b>656</b>	<b>18.4</b>	656	18.4	656	18.4	<b>649</b>	18.7	<b>649</b>	18.6	<b>649</b>	<b>18.6</b>
462.libquantum	4.98	4160	5.66	3660	<b>5.04</b>	<b>4110</b>	4.98	4160	<b>5.66</b>	3660	<b>5.04</b>	<b>4110</b>
464.h264ref	<b>692</b>	<b>32.0</b>	691	32.0	693	31.9	<b>692</b>	<b>32.0</b>	691	32.0	693	31.9
471.omnetpp	278	22.5	<b>276</b>	<b>22.7</b>	276	22.7	<b>200</b>	31.3	<b>201</b>	<b>31.1</b>	201	31.0
473.astar	<b>353</b>	<b>19.9</b>	353	19.9	352	19.9	<b>353</b>	19.9	<b>353</b>	<b>19.9</b>	355	19.7
483.xalancbmk	<b>163</b>	<b>42.4</b>	162	42.5	163	42.3	<b>151</b>	45.8	<b>151</b>	<b>45.7</b>	151	45.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### BIOS Settings:

Intel Hyper-Threading Technology option set to Disabled  
 CPU performance set to Enterprise  
 Power Technology set to Energy Efficient  
 Energy Performance set to Balanced Performance  
 Memory RAS configuration set to Maximum Performance  
 Memory Power Saving Mode set to Disabled  
 QPI Snoop Mode set to Home Directory Snoop with OSB  
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6914  
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1  
 running on linux-1fno Fri Sep 2 11:10:36 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : Intel(R) Xeon(R) CPU E5-4610 v4 @ 1.80GHz  
 4 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon E5-4610 v4 1.80 GHz)

**SPECint2006 = 39.4**

**SPECint\_base2006 = 37.9**

**CPU2006 license:** 9019

**Test date:** Sep-2016

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2016

**Tested by:** Cisco Systems

**Software Availability:** Sep-2016

## Platform Notes (Continued)

```
40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 10
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
physical 2: cores 0 1 2 3 4 8 9 10 11 12
physical 3: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB

From /proc/meminfo
MemTotal:      529169068 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 1
  # This file is deprecated and will be removed in a future service pack or
  release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP1"
  VERSION_ID="12.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
Linux linux-1fno 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 1 10:31
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdal      xfs   280G   14G  266G   5% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. B420M4.3.1.2d.0.081120161622 08/11/2016
Memory:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon E5-4610 v4 1.80 GHz)

**SPECint2006 = 39.4**

**SPECint\_base2006 = 37.9**

**CPU2006 license:** 9019

**Test date:** Sep-2016

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2016

**Tested by:** Cisco Systems

**Software Availability:** Sep-2016

## Platform Notes (Continued)

32x 0xAD00 HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at 1866 MHz  
16x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

OMP\_NUM\_THREADS = "40"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB

memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon E5-4610 v4 1.80 GHz)

**SPECint2006 = 39.4**

**SPECint\_base2006 = 37.9**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Sep-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Sep-2016

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
473.astar: icpc -m64
```

## Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
403.gcc: -DSPEC_CPU_LP64
```

```
429.mcf: -DSPEC_CPU_LP64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmr: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -DSPEC_CPU_LP64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

<b>Cisco Systems</b>	<b>SPECint2006 =</b>	<b>39.4</b>
Cisco UCS B420 M4 (Intel Xeon E5-4610 v4 1.80 GHz)	<b>SPECint_base2006 =</b>	<b>37.9</b>
<b>CPU2006 license:</b> 9019	<b>Test date:</b>	Sep-2016
<b>Test sponsor:</b> Cisco Systems	<b>Hardware Availability:</b>	Jun-2016
<b>Tested by:</b> Cisco Systems	<b>Software Availability:</b>	Sep-2016

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
               -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div
            -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
          -opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes
```

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
              -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
              -par-num-threads=1(pass 1) -prof-use(pass 2)
              -opt-ra-region-strategy=block           -ansi-alias
              -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
            -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
                -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap
```



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon E5-4610 v4 1.80 GHz)

**SPECint2006 = 39.4**

**SPECint\_base2006 = 37.9**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Sep-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Sep-2016

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 7 16:14:42 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 March 2017.