# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R730 (Intel Xeon E5-2683 v4, 2.10 GHz)

SPECint®2006 = 63.7

SPECint_base2006 = 61.8

**CPU2006 license:** 55
**Test sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test date:** Mar-2017
**Hardware Availability:** Oct-2016
**Software Availability:** Sep-2016

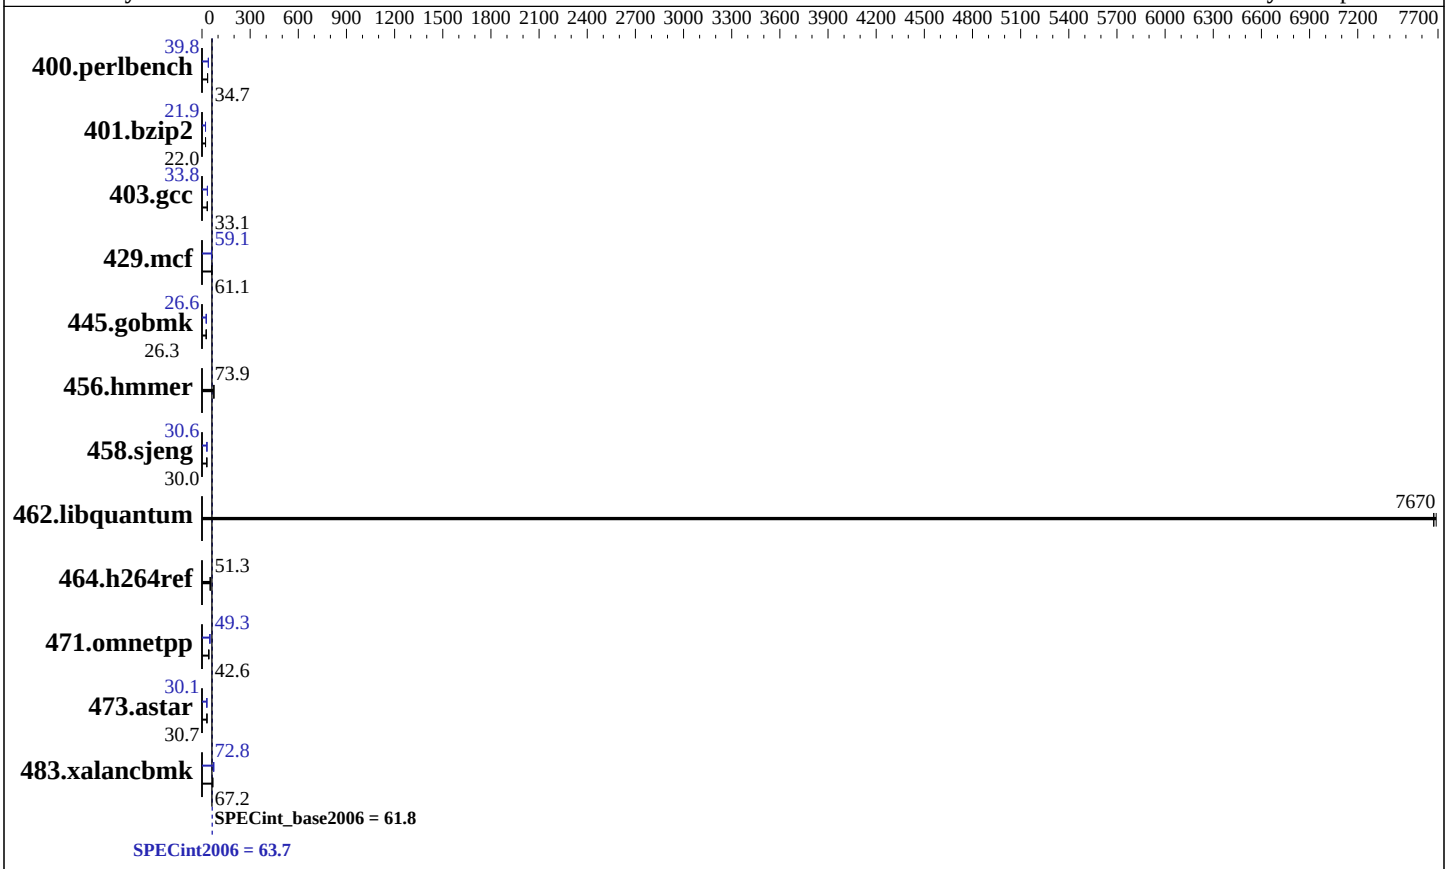


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E5-2683 v4 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.00 GHz |
| CPU MHz: | 2100 |
| FPU: | Integrated |
| CPU(s) enabled: | 32 cores, 2 chips, 16 cores/chip |
| CPU(s) orderable: | 1,2 chip |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |
| L3 Cache: | 40 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R) |
| Disk Subsystem: | 2 x 2000 GB 7200 RPM SAS RAID 0 |
| Other Hardware: | None |

## Software

| | |
|---|---|
| Operating System: | SUSE Linux Enterprise Server 12 3.12.28-4-default |
| Compiler: | C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux |
| Auto Parallel: | Yes |
| File System: | ext4 |
| System State: | Run level 3 (multi user) |
| Base Pointers: | 32/64-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | Microquill SmartHeap V10.2 |

# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R730 (Intel Xeon E5-2683 v4, 2.10 GHz)

SPECint2006 = 63.7

SPECint_base2006 = 61.8

**CPU2006 license:** 55
**Test sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test date:** Mar-2017
**Hardware Availability:** Oct-2016
**Software Availability:** Sep-2016

## Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 281 | 34.8 | 282 | 34.7 | **281** | **34.7** | 246 | 39.7 | 246 | 39.8 | **246** | **39.8** |
| 401.bzip2 | 436 | 22.1 | **439** | **22.0** | 441 | 21.9 | 441 | 21.9 | 440 | 21.9 | **441** | **21.9** |
| 403.gcc | **244** | **33.1** | 244 | 33.0 | 243 | 33.1 | 238 | 33.8 | 237 | 33.9 | **238** | **33.8** |
| 429.mcf | 149 | 61.2 | **149** | **61.1** | 150 | 60.6 | 155 | 58.9 | 154 | 59.3 | **154** | **59.1** |
| 445.gobmk | 399 | 26.3 | **399** | **26.3** | 399 | 26.3 | 394 | 26.6 | **395** | **26.6** | 395 | 26.6 |
| 456.hmmer | **126** | **73.9** | 126 | 73.9 | 126 | 73.8 | **126** | **73.9** | 126 | 73.9 | 126 | 73.8 |
| 458.sjeng | 404 | 30.0 | 403 | 30.0 | **404** | **30.0** | **396** | **30.6** | 396 | 30.6 | 396 | 30.6 |
| 462.libquantum | 2.69 | 7690 | **2.70** | **7670** | 2.70 | 7670 | 2.69 | 7690 | **2.70** | **7670** | 2.70 | 7670 |
| 464.h264ref | **431** | **51.3** | 432 | 51.2 | 430 | 51.4 | **431** | **51.3** | 432 | 51.2 | 430 | 51.4 |
| 471.omnetpp | **147** | **42.6** | 145 | 43.1 | 153 | 40.9 | 128 | 49.0 | **127** | **49.3** | 127 | 49.3 |
| 473.astar | **228** | **30.7** | 228 | 30.7 | 228 | 30.8 | 233 | 30.1 | 233 | 30.1 | **233** | **30.1** |
| 483.xalancbmk | 105 | 66.0 | **103** | **67.2** | 103 | 67.3 | 94.7 | 72.9 | **94.8** | **72.8** | 94.8 | 72.8 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The config file option 'submit' was used.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Platform Notes

```
BIOS settings:
Snoop Mode set to Opportunistic Snoop Broadcast
Virtualization Technology disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
C1E disabled
Energy Efficient Turbo disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Logical Processor disabled
Sysinfo program /root/previous-cpu2006-1.2/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-0171 Wed Mar  1 13:44:44 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo
```

Continued on next page

## Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2683 v4 @ 2.10GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 16
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
   cache size : 40960 KB

From /proc/meminfo
   MemTotal:       264567484 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 0
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12"
      VERSION_ID="12"
      PRETTY_NAME="SUSE Linux Enterprise Server 12"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
   Linux linux-0171 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
   (9879bd4) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 1 11:00

SPEC is set to: /root/previous-cpu2006-1.2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      ext4  246G   19G  226G   8% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
```

Continued on next page

## Platform Notes (Continued)

```
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS Dell Inc. 2.3.4 11/08/2016
   Memory:
    7x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz
    9x 00CE00B300CE M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz
    8x Not Specified Not Specified

  (End of data from sysinfo program)
```

## General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/previous-cpu2006-1.2/libs/32:/root/previous-cpu2006-1.2/libs/64:/root/previous-cpu2006-1.2/sh10.2"
OMP_NUM_THREADS = "32"
The Dell PowerEdge R730 and the PowerEdge R730xd models are electronically equivalent.
The results have been measured on a Dell PowerEdge R730xd model.
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

## Base Portability Flags

```
    400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
      401.bzip2: -DSPEC_CPU_LP64
        403.gcc: -DSPEC_CPU_LP64
        429.mcf: -DSPEC_CPU_LP64
      445.gobmk: -DSPEC_CPU_LP64
      456.hmmer: -DSPEC_CPU_LP64
      458.sjeng: -DSPEC_CPU_LP64
  462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
    464.h264ref: -DSPEC_CPU_LP64
    471.omnetpp: -DSPEC_CPU_LP64
      473.astar: -DSPEC_CPU_LP64
  483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch -auto-p32`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

445.gobmk: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

C++ benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

473.astar: `icpc -m64`

## Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -auto-ilp32 -qopt-prefetch

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

456.hmmer: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-ra-region-strategy=block -Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Peak Other Flags

C benchmarks:

Continued on next page

## Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.xml`


SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Mar 22 10:49:27 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 March 2017.