



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint®2006 = **80.2**

Lenovo System x3250 M6
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECint_base2006 = **77.5**

CPU2006 license: 9017


Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Nov-2016

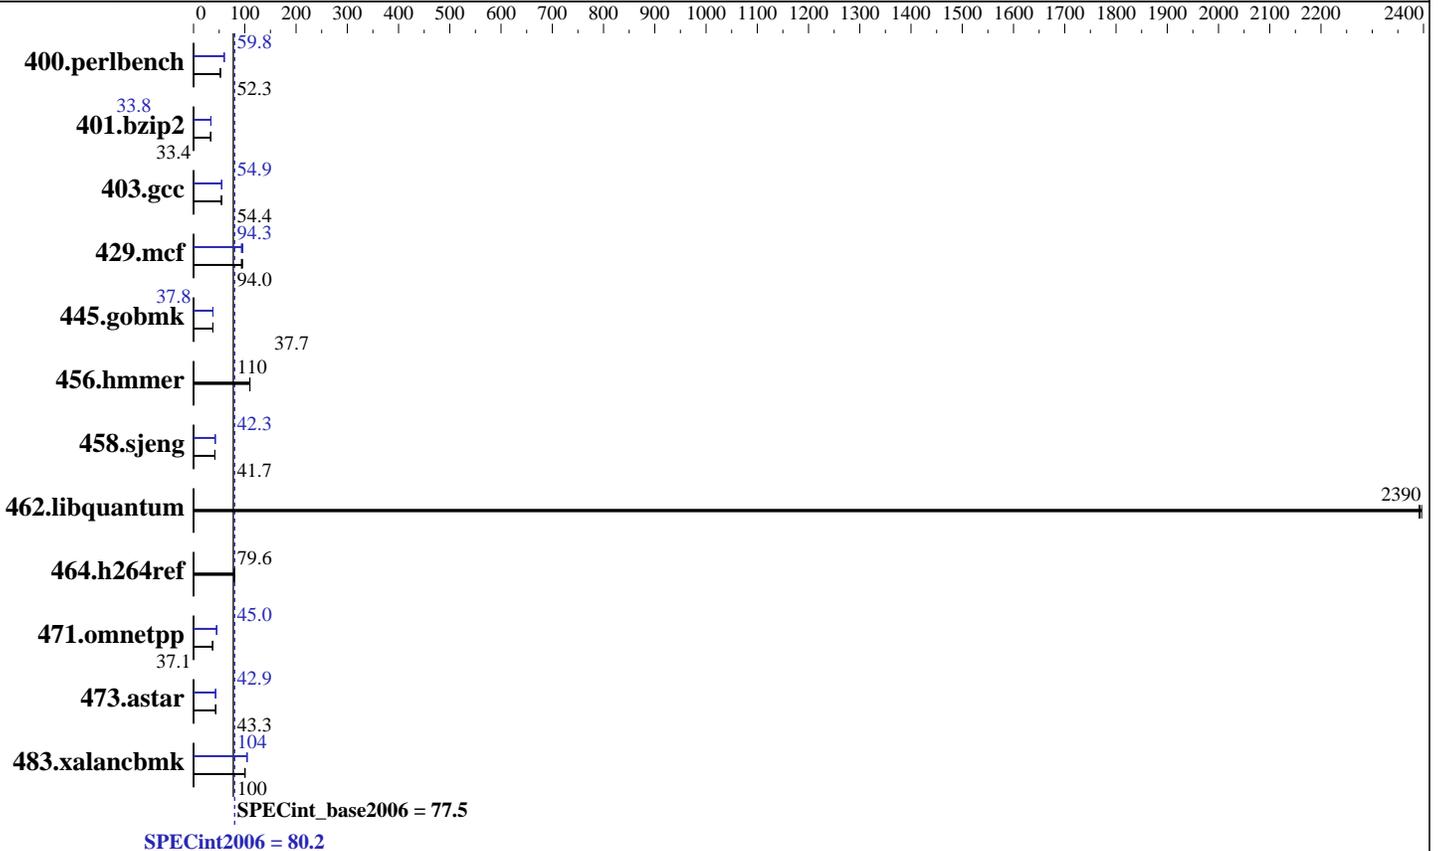

Hardware

CPU Name: Intel Xeon E3-1280 v6
 CPU Characteristics: Intel Turbo Boost Technology up to 4.20 GHz
 CPU MHz: 3900
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-U)
 Disk Subsystem: 1 x 800 GB SATA SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 Kernel 3.10.0-514.el7.x86_64
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = **80.2**

Lenovo System x3250 M6
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECint_base2006 = **77.5**

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Nov-2016

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|----------------|------------|-------------|-------------|-------------|------------|-------------|------------|-------------|-------------|-------------|-------------|-------------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 186 | 52.5 | 187 | 52.1 | 187 | 52.3 | 163 | 59.8 | 163 | 59.8 | 163 | 59.8 |
| 401.bzip2 | 289 | 33.4 | 289 | 33.4 | 288 | 33.5 | 286 | 33.8 | 286 | 33.8 | 285 | 33.8 |
| 403.gcc | 147 | 54.6 | 148 | 54.4 | 148 | 54.4 | 147 | 54.7 | 147 | 54.9 | 147 | 54.9 |
| 429.mcf | 97.6 | 93.5 | 97.1 | 94.0 | 95.3 | 95.7 | 94.8 | 96.2 | 96.7 | 94.3 | 97.7 | 93.3 |
| 445.gobmk | 278 | 37.8 | 278 | 37.7 | 278 | 37.7 | 278 | 37.8 | 277 | 37.8 | 278 | 37.8 |
| 456.hmmer | 84.9 | 110 | 84.9 | 110 | 84.9 | 110 | 84.9 | 110 | 84.9 | 110 | 84.9 | 110 |
| 458.sjeng | 290 | 41.7 | 290 | 41.7 | 291 | 41.6 | 286 | 42.3 | 286 | 42.3 | 286 | 42.3 |
| 462.libquantum | 8.65 | 2400 | 8.66 | 2390 | 8.66 | 2390 | 8.65 | 2400 | 8.66 | 2390 | 8.66 | 2390 |
| 464.h264ref | 278 | 79.5 | 278 | 79.6 | 278 | 79.6 | 278 | 79.5 | 278 | 79.6 | 278 | 79.6 |
| 471.omnetpp | 168 | 37.1 | 169 | 37.1 | 168 | 37.1 | 139 | 45.0 | 138 | 45.2 | 139 | 45.0 |
| 473.astar | 163 | 43.0 | 162 | 43.3 | 162 | 43.3 | 164 | 42.9 | 164 | 42.8 | 162 | 43.2 |
| 483.xalancbmk | 68.8 | 100 | 68.8 | 100 | 68.7 | 100 | 66.0 | 105 | 66.3 | 104 | 66.1 | 104 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
```

Platform Notes

```
BIOS configuration:
Intel Virtualization Technology set to Disable
Operating Mode set to Maximum Performance
Hyper-Threading set to Disable
Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on miaoli-01-rhel7.3 Sun Mar 19 17:04:10 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1280 v6 @ 3.90GHz
1 "physical id"s (chips)
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 80.2

Lenovo System x3250 M6
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECint_base2006 = 77.5

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Nov-2016

Platform Notes (Continued)

4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings  : 4
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      65932404 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
```

```
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux miaoli-01-rhel7.3 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT
2016 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 17 14:02
```

```
SPEC is set to: /home/cpu2006-1.2-ic17.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   689G  4.5G  685G   1% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO -[M3E121PUS-2.00]- 03/14/2017

Memory:
4x Samsung M378A2K43BB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 80.2

Lenovo System x3250 M6
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECint_base2006 = 77.5

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Nov-2016

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmarthep64



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 80.2

Lenovo System x3250 M6
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECint_base2006 = 77.5

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Nov-2016

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

C++ benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -auto-ilp32 -qopt-prefetch

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 80.2

Lenovo System x3250 M6
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECint_base2006 = 77.5

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)

456.hmmr: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-ra-region-strategy=block
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-D.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-D.xml>



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M6
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECint2006 = 80.2

SPECint_base2006 = 77.5

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Mar-2017

Hardware Availability: Apr-2017

Software Availability: Nov-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Apr 4 16:57:16 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 April 2017.