SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECfp®_rate2006 = 3020

SPECfp_rate_base2006 = 2720

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

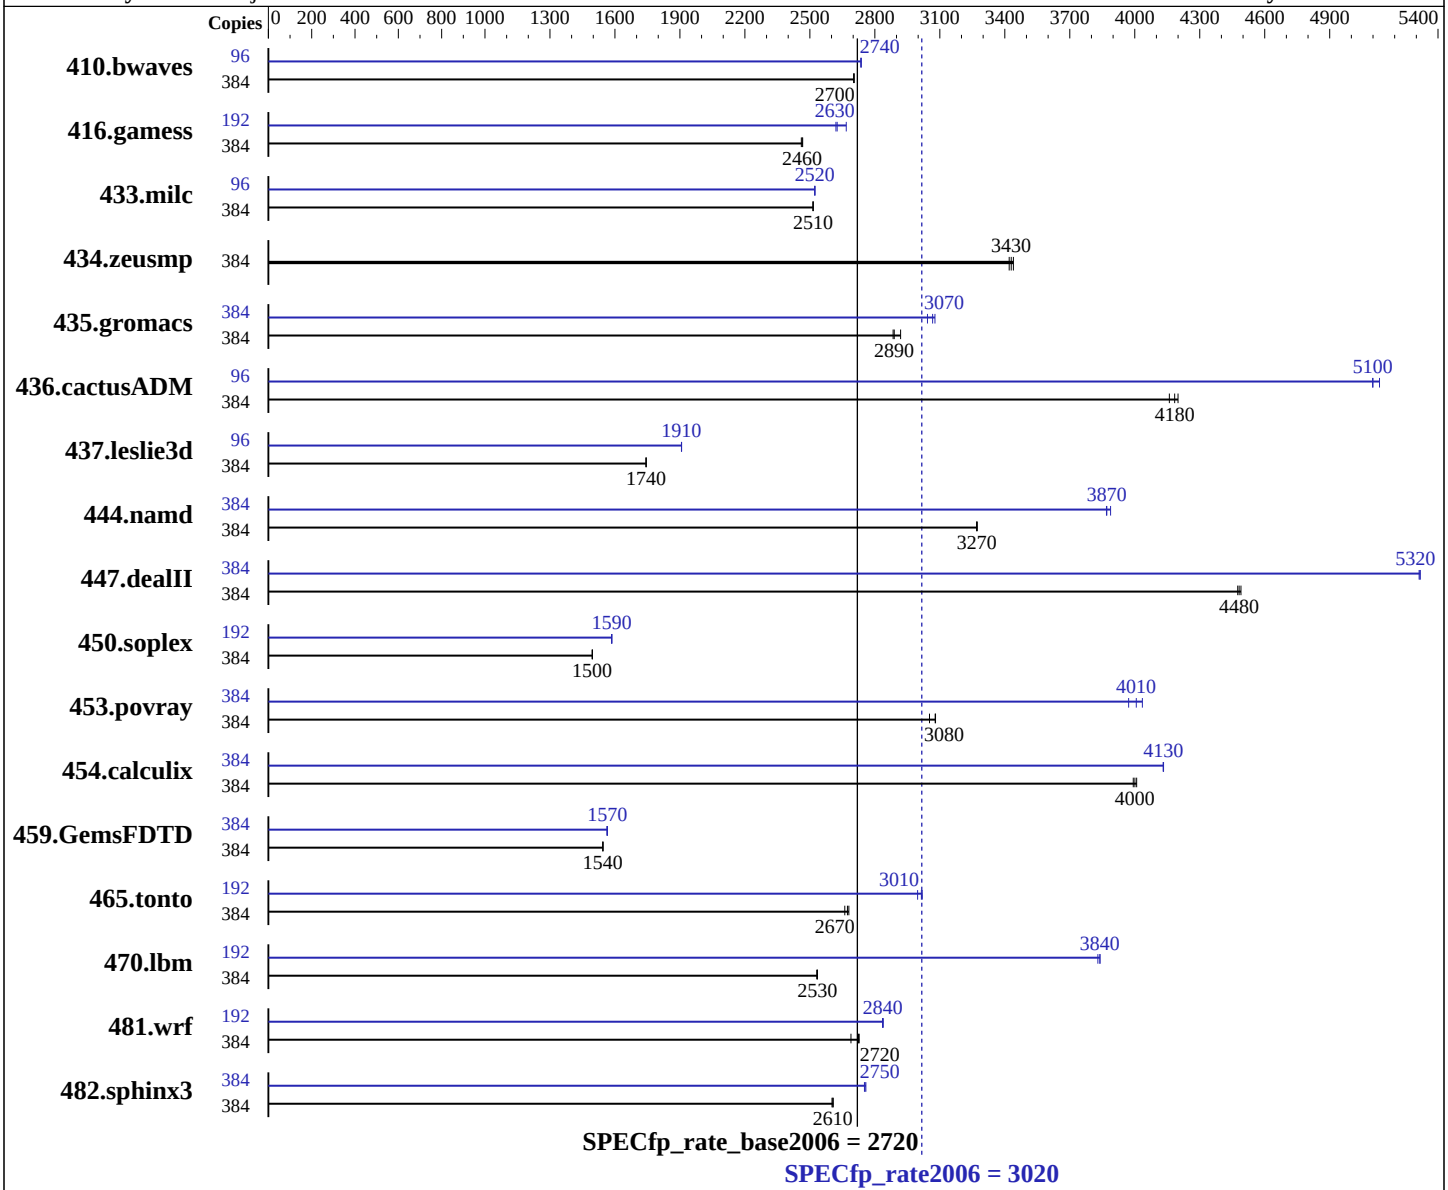

Hardware

CPU Name:	SPARC64 XII
CPU Characteristics:	High Speed Mode up to 4.35 GHz
CPU MHz:	4250
FPU:	Integrated
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip, 8 threads/core
CPU(s) orderable:	1 to 16 BBs; each BB contains 1 or 2 CPU chips; the number of orderable total cores is 2, 3, 4, .. 384
Primary Cache:	64 KB I + 64 KB D on chip per core

Continued on next page

Software

Operating System:	Oracle Solaris 11.3 (with June 2017 SRU)
Compiler:	C/C++/Fortran: Version 12.6 of Oracle Developer Studio
Auto Parallel:	No
File System:	tmpfs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECfp_rate2006 = 3020

SPECfp_rate_base2006 = 2720

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Secondary Cache: 512 KB I+D on chip per core
L3 Cache: 32 MB I+D on chip per chip
Other Cache: None
Memory: 2 TB (64 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 600 GB 10K RPM SAS (for system disk)
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	384	1931	2700	1930	2700	**1930**	**2700**	96	477	2740	**477**	**2740**	477	2740
416.gamess	384	3056	2460	**3051**	**2460**	3048	2470	192	1409	2670	**1432**	**2630**	1435	2620
433.milc	384	1401	2520	1402	2510	**1402**	**2510**	96	349	2520	349	2520	**349**	**2520**
434.zeusmp	384	1016	3440	**1019**	**3430**	1022	3420	384	1016	3440	**1019**	**3430**	1022	3420
435.gromacs	384	951	2880	**949**	**2890**	939	2920	384	901	3040	891	3080	**894**	**3070**
436.cactusADM	384	1093	4200	**1097**	**4180**	1103	4160	96	225	5100	**225**	**5100**	224	5130
437.leslie3d	384	**2070**	**1740**	2070	1740	2070	1740	96	**473**	**1910**	473	1910	473	1910
444.namd	384	941	3270	942	3270	**942**	**3270**	384	792	3890	**796**	**3870**	796	3870
447.dealII	384	**980**	**4480**	982	4480	978	4490	384	826	5320	827	5310	**826**	**5320**
450.soplex	384	2142	1500	**2142**	**1500**	2140	1500	192	**1010**	**1590**	1010	1590	1011	1580
453.povray	384	**664**	**3080**	663	3080	669	3050	384	514	3970	**510**	**4010**	506	4040
454.calculix	384	793	3990	790	4010	**792**	**4000**	384	**767**	**4130**	767	4130	767	4130
459.GemsFDTD	384	2637	1550	**2638**	**1540**	2639	1540	384	2607	1560	**2603**	**1570**	2603	1570
465.tonto	384	1410	2680	**1413**	**2670**	1420	2660	192	626	3020	**627**	**3010**	630	3000
470.lbm	384	2084	2530	**2082**	**2530**	2081	2530	192	**687**	**3840**	687	3840	689	3830
481.wrf	384	1595	2690	1572	2730	**1574**	**2720**	192	756	2840	755	2840	**756**	**2840**
482.sphinx3	384	2870	2610	2876	2600	**2872**	**2610**	384	2720	2750	**2717**	**2750**	2713	2760

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
Processes were assigned to specific processors using 'pbind' commands.
The config file option 'submit' was used, along with a list of
processors in the 'BIND' variable, to generate the pbind commands.
(For details, please see the config file.)
```

Operating System Notes

```
Shell Environments:
   ulimit -s 131072 was used to limit the space consumed by the stack
   (and therefore make more space available to the heap).

   The "Logical Domains Manager" service was turned off using the command "svcadm disable ldmd".
```

Continued on next page

Operating System Notes (Continued)

```
System Tunables:
(/etc/system parameters)
   autoup = 86400
      Causes pages older than the listed number of seconds to be written by fsflush.
   doiflush = 0
     Controls whether file system metadata syncs will be executed during fsflush invocations.
   dopageflush = 0
      Controls whether memory is examined for modified pages during fsflush invocations.
   zfs:zfs_arc_max=1073741824
      Determines the maximum size of the ZFS Adaptive Replacement Cache (ARC).
```

Platform Notes

```
Firmware Settings:
(XSCF operations)
   Set High Speed Mode via XSCF command "sethsmode -s on".

 Sysinfo program /export/cpu2006/config/sysinfo
 Revision 6993 of 2015-11-06 (c9426fd40261140bb4c02f7d35768596)
 running on H2S-257-D0 Mon Mar  6 03:17:40 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /usr/sbin/psrinfo
    SPARC64-XII (chipid 0, clock 4250 MHz)
    SPARC64-XII (chipid 1, clock 4250 MHz)
    SPARC64-XII (chipid 2, clock 4250 MHz)
    SPARC64-XII (chipid 3, clock 4250 MHz)
    4 chips
    384 threads
    4250 MHz

 From kstat:       48 cores

 From prtconf: 2093056 Megabytes

 /etc/release:
      Oracle Solaris 11.3 SPARC
 uname -a:
    SunOS H2S-257-D0 5.11 11.3 sun4v sparc sun4v

 SPEC is set to: /export/cpu2006

 disk: df -h  /export/cpu2006
 Filesystem             Size   Used  Available Capacity  Mounted on
 rpool/export           547G    26G       243G    10%    /export

 (End of data from sysinfo program)
```

General Notes

```
The Building Block (BB) is just a Fujitsu SPARC M12-2S that is the basic
unit to be expanded as if stacking up children's blocks.

File System:
 tmpfs: output_root was used to put run directories in /tmp/cpu2006
 zfs: operating system

SPEC CPU2006 benchmark:
 Updated with runspec --update
```

Base Compiler Invocation

C benchmarks:
`cc`

C++ benchmarks:
`CC`

Fortran benchmarks:
`f90`

Benchmarks using both Fortran and C:
`cc f90`

Base Portability Flags

447.dealII: `-DBOOST_NO_COMPILER_CONFIG`

Base Optimization Flags

C benchmarks:
`-std=c99 -m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M -xsegment_align=4M -xthroughput -xalias_level=std -xprefetch_level=2`

C++ benchmarks:
`-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M -xsegment_align=4M -xthroughput -xalias_level=compatible -library=stlport4`

Fortran benchmarks:
`-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M -xsegment_align=4M -xthroughput -xvector=no%lib`

Benchmarks using both Fortran and C:
`-std=c99 -m32 -fast(cc) -fast(f95) -xtarget=sparc64xii -xipo=2 -xpagesize=4M -xsegment_align=4M -xthroughput -xalias_level=std -xprefetch_level=2 -xvector=no%lib`

Base Other Flags

C benchmarks:
-xjobs=8

C++ benchmarks:
-xjobs=8

Fortran benchmarks:
-xjobs=8

Benchmarks using both Fortran and C:
-xjobs=8

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Portability Flags

447.dealII: -DBOOST_NO_COMPILER_CONFIG

Peak Optimization Flags

C benchmarks:

433.milc: -std=c99 -m32 -fast -xtarget=sparc64xii -xpagesize=4M
-xsegment_align=4M -xthroughput -xipo=2 -xalias_level=std
-fsimple=1 -W2,-Ainline:rs=400
-Qoption cg -Qms_pipe+alldoall -W2,-Asac -xthroughput=no

470.lbm: -std=c99 -m32 -fast -xtarget=sparc64xii -xpagesize=4M
-xsegment_align=4M -xthroughput -xipo=2 -xalias_level=std
-xprefetch_level=2 -xpagesize=256M -xsegment_align=256M
-xthroughput=no -lbsdmalloc

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xO4 -xipo=2 -xprefetch=latx:0.6
-xinline_param=level:1 -xprefetch=no%auto -lbsdmalloc

C++ benchmarks:

444.namd: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xalias_level=compatible -xprefetch=no%auto
-Wc,-Qms_pipe+alldoall

447.dealII: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xtarget=sparc64xplus -xipo=1
-xalias_level=compatible -xrestrict -xprefetch=no%auto
-Qoption cg -Qiselect-funcalign=64 -xthroughput=yes
-library=stdcxx4 -template=extdef

450.soplex: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xipo=2 -Wc,-Qlp=0

453.povray: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xO4 -xtarget=sparc64xplus -xipo=2
-xalias_level=compatible -xlinkopt=2 -xprefetch=no%auto
-xunroll=7 -Qoption iropt -Ainline:rs=1024
-Qoption iropt -Ainline:cs=1024
-Qoption iropt -Ainline:inc=900 -lfast

Fortran benchmarks:

410.bwaves: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xipo=2 -xunroll=4 -xvector=%none
-xprefetch=no%auto

416.gamess: -m32 -fast -xtarget=sparc64xii -xpagesize=4M
-xsegment_align=4M -xthroughput -xvector=no%simd
-xprefetch=latx:0.1

434.zeusmp: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

437.leslie3d: -m32 -fast -xtarget=sparc64xii -xpagesize=4M
-xsegment_align=4M -xthroughput -xunroll=2 -xvector=%none
-xprefetch=latx:0.8 -Qoption cg -Qms_pipe+alldoall
-xinline_param=level:1 -xthroughput=no

459.GemsFDTD: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xunroll=9 -xprefetch=latx:0.2
-xprefetch_level=3 -Qoption cg -Qlp-av=128
-Qoption iropt -Rujam

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xipo=1 -xO4 -xunroll=3 -xprefetch=no%auto
-xthroughput=no -lbsdmalloc

Benchmarks using both Fortran and C:

435.gromacs: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast(cc) -fast(f95)
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xalias_level=strong -Wc,-Qicache-chbab=1
-Wc,-Qiselect-rsqrta=2 -Wc,-Qiselect-rsqrta1x=2
-qoption cg -Qicache-chbab=1 -qoption cg -Qiselect-rsqrta=2
-qoption cg -Qiselect-rsqrta1x=2

436.cactusADM: -std=c99 -m32 -fast(cc) -fast(f95) -xtarget=sparc64xii
-xpagesize=4M -xsegment_align=4M -xthroughput
-xtarget=sparc64xplus -xunroll=10 -xprefetch=latx:2.0
-xpagesize=256M -xsegment_align=256M -xthroughput=no
-lbsdmalloc

454.calculix: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast(cc) -fast(f95)
-xtarget=sparc64xii -xpagesize=4M -xsegment_align=4M
-xthroughput -xtarget=sparc64xplus -xipo=1
-Wc,-Qiselect-funcalign=64 -xinline_param=level:3
-Qoption cg -Qiselect-funcalign=64

481.wrf: -std=c99 -m32 -fast(cc) -fast(f95) -xtarget=sparc64xii
-xpagesize=4M -xsegment_align=4M -xthroughput -xunroll=9
-xprefetch=latx:0.4 -Qoption iropt -Rujam -xO4
-xthroughput=no

Peak Other Flags

C benchmarks:
`-xjobs=8`

C++ benchmarks:
`-xjobs=8`

Fortran benchmarks:
`-xjobs=8`

Benchmarks using both Fortran and C:
`-xjobs=8`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Oracle-Developer-Studio12.6.html`
`http://www.spec.org/cpu2006/flags/Fujitsu-M12-2S.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Oracle-Developer-Studio12.6.xml`
`http://www.spec.org/cpu2006/flags/Fujitsu-M12-2S.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Apr 20 09:42:28 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 April 2017.