SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen9
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp®_rate2006 = 215

SPECfp_rate_base2006 = 209

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Mar-2017
Hardware Availability: May-2017
Software Availability: Nov-2016

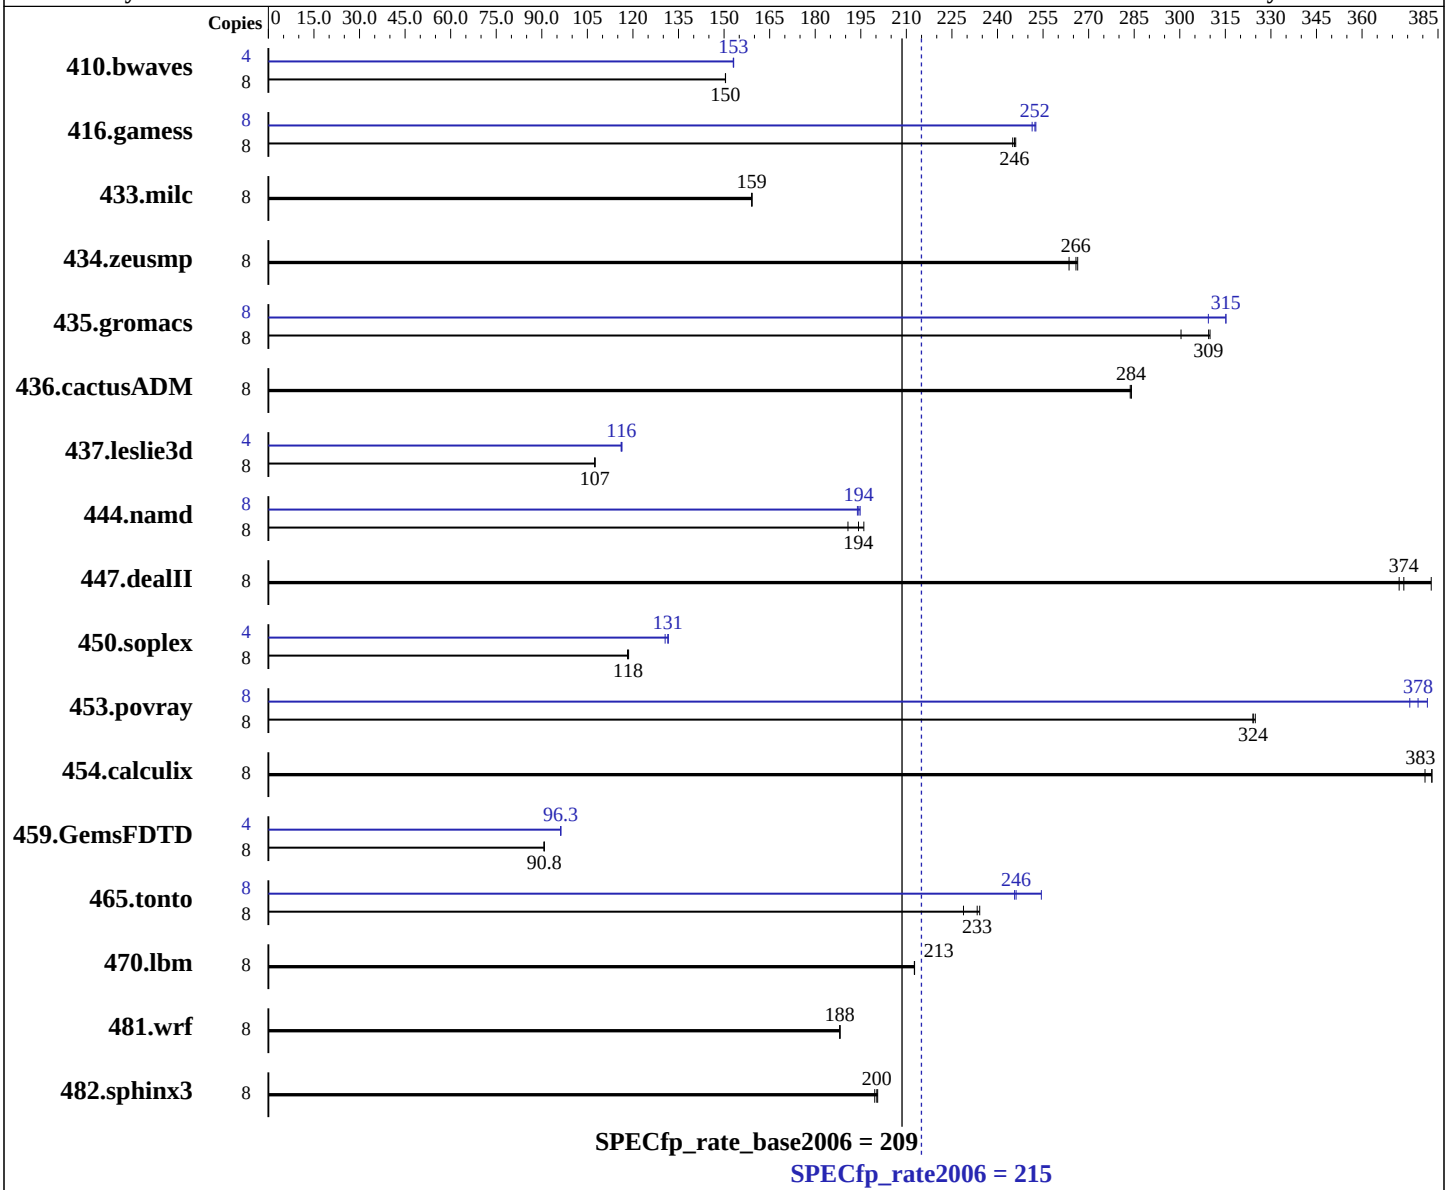

Hardware

CPU Name:	Intel Xeon E3-1280 v6
CPU Characteristics:	Intel Turbo Boost Technology up to 4.20 GHz
CPU MHz:	3900
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP2 Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen9
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp_rate2006 = 215

SPECfp_rate_base2006 = 209

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Mar-2017
Hardware Availability: May-2017
Software Availability: Nov-2016

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-E)
Disk Subsystem: 1 x 500 GB SATA 7.2 K RPM, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	722	150	723	150	**723**	**150**	4	**355**	**153**	355	153	355	153
416.gamess	8	639	245	637	246	**638**	**246**	8	620	253	**621**	**252**	623	251
433.milc	8	461	159	**461**	**159**	462	159	8	461	159	**461**	**159**	462	159
434.zeusmp	8	**274**	**266**	273	266	276	264	8	**274**	**266**	273	266	276	264
435.gromacs	8	**185**	**309**	190	300	184	310	8	181	315	**181**	**315**	185	309
436.cactusADM	8	337	284	337	284	**337**	**284**	8	337	284	337	284	**337**	**284**
437.leslie3d	8	699	108	**700**	**107**	700	107	4	323	116	**323**	**116**	324	116
444.namd	8	336	191	**330**	**194**	327	196	8	329	195	331	194	**330**	**194**
447.dealII	8	**245**	**374**	239	383	246	372	8	**245**	**374**	239	383	246	372
450.soplex	8	563	119	564	118	**564**	**118**	4	**254**	**131**	253	132	255	131
453.povray	8	131	325	131	324	**131**	**324**	8	113	376	**112**	**378**	112	382
454.calculix	8	**172**	**383**	173	381	172	383	8	**172**	**383**	173	381	172	383
459.GemsFDTD	8	935	90.8	**935**	**90.8**	935	90.7	4	441	96.3	441	96.2	**441**	**96.3**
465.tonto	8	336	234	**337**	**233**	344	229	8	320	246	**320**	**246**	309	254
470.lbm	8	517	213	517	213	**517**	**213**	8	517	213	517	213	**517**	**213**
481.wrf	8	475	188	475	188	**475**	**188**	8	475	188	475	188	**475**	**188**
482.sphinx3	8	**779**	**200**	777	201	781	200	8	**779**	**200**	777	201	781	200

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
echo 1 >       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Platform Notes

```
BIOS Configuration:
 Power Profile set to Custom
 Minimum Processor Idle Power Core C-State set to C3 State
 Minimum Processor Idle Power Package C-State set to Package C6 (retention) State
 Energy/Performance Bias set to Maximum Performance
 Thermal Configuration set to Maximum Cooling
 Processor Power and Utilization Monitoring set to Disabled
 Memory Double Refresh Rate set to 1x Refresh
 NUMA Group Size Optimization set to Flat

Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-5fau Wed Mar 29 20:01:53 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E3-1280 v6 @ 3.90GHz
      1 "physical id"s (chips)
      8 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 4
      siblings  : 8
      physical 0: cores 0 1 2 3
   cache size : 8192 KB

From /proc/meminfo
   MemTotal:       65752912 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
```

Continued on next page

Platform Notes (Continued)

```
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

  uname -a:
     Linux linux-5fau 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
     (9464f67) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Mar 29 12:46

  SPEC is set to: /home/cpu2006
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda4      xfs   424G   14G  411G   4% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS HP U22 01/17/2017
    Memory:
     4x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-malloc-options=3
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-HSW-revG.html
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-HSW-revG.xml
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revD.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 2 14:04:56 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 May 2017.