



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint®\_rate2006 = Not Run**

PowerEdge T330 (Intel Xeon E3-1230 v6, 3.50 GHz)

**SPECint\_rate\_base2006 = 257**

CPU2006 license: 55


Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

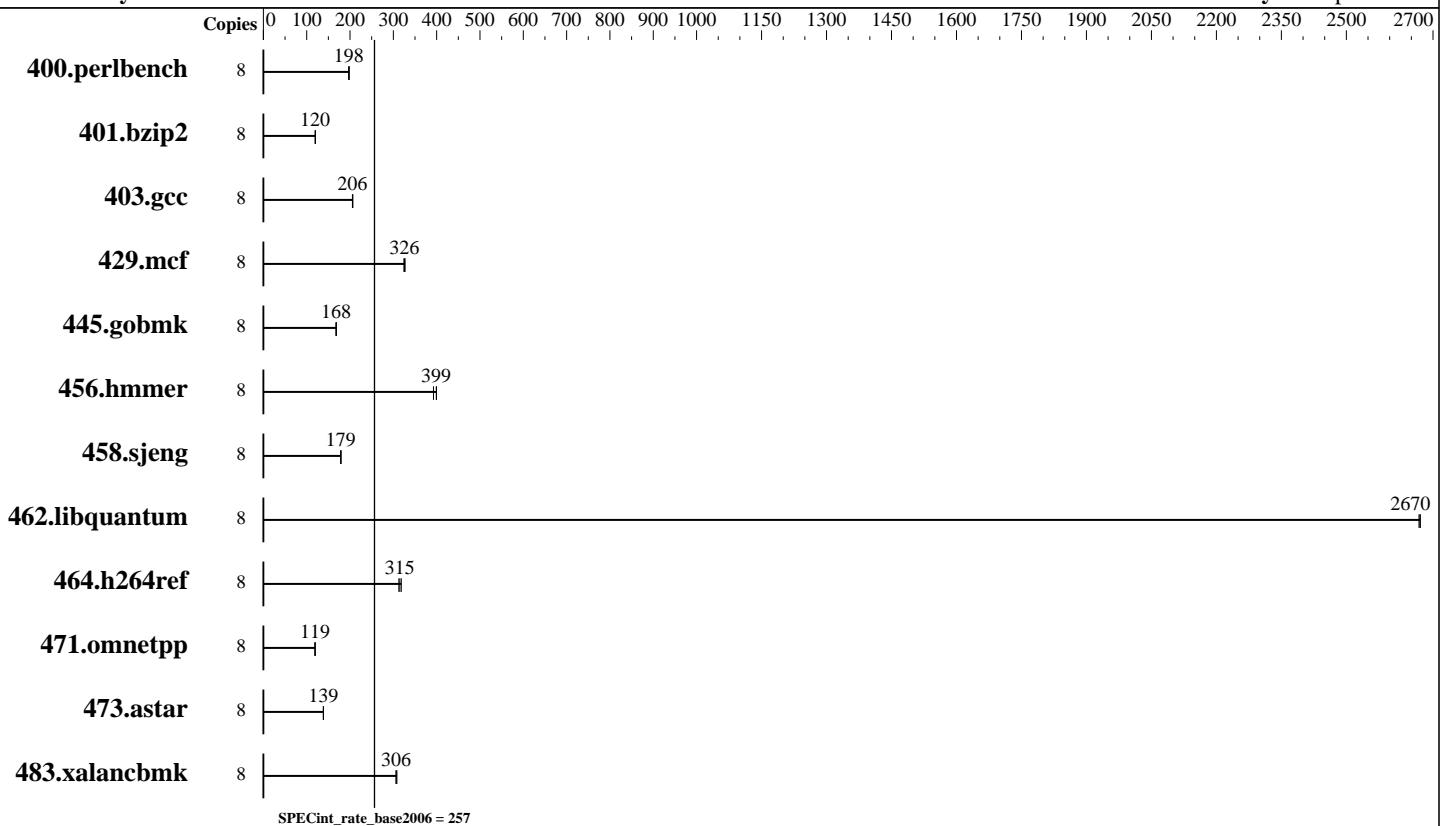

## Hardware

CPU Name: Intel Xeon E3-1230 v6  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-U)  
 Disk Subsystem: 500 GB SATA 7200 RPM  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.10.8-4.geb4ae7d-default  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = Not Run**

PowerEdge T330 (Intel Xeon E3-1230 v6, 3.50 GHz)

**SPECint\_rate\_base2006 = 257**

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>396</b>	<b>198</b>	397	197	395	198							
401.bzip2	8	<b>644</b>	<b>120</b>	644	120	643	120							
403.gcc	8	313	206	<b>313</b>	<b>206</b>	312	207							
429.mcf	8	<b>224</b>	<b>326</b>	223	327	225	324							
445.gobmk	8	<b>499</b>	<b>168</b>	498	168	500	168							
456.hmmer	8	187	400	<b>187</b>	<b>399</b>	190	393							
458.sjeng	8	<b>541</b>	<b>179</b>	542	179	541	179							
462.libquantum	8	62.1	2670	<b>62.1</b>	<b>2670</b>	62.1	2670							
464.h264ref	8	566	313	556	318	<b>562</b>	<b>315</b>							
471.omnetpp	8	419	119	418	120	<b>419</b>	<b>119</b>							
473.astar	8	405	139	406	138	<b>405</b>	<b>139</b>							
483.xalancbmk	8	179	308	<b>180</b>	<b>306</b>	180	306							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Virtualization Technology disabled

System Profile set to Performance

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-rlzd Fri Apr 7 21:25:07 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1230 v6 @ 3.50GHz

1 "physical id"s (chips)

8 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = Not Run

PowerEdge T330 (Intel Xeon E3-1230 v6, 3.50 GHz)

SPECint\_rate\_base2006 = 257

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

## Platform Notes (Continued)

```
caution.)  
    cpu cores : 4  
    siblings   : 8  
    physical 0: cores 0 1 2 3  
    cache size : 8192 KB  
  
From /proc/meminfo  
MemTotal:       65803648 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
/usr/bin/lsb_release -d  
SUSE Linux Enterprise Server 12 SP2  
  
From /etc/*release* /etc/*version*  
SuSE-release:  
    SUSE Linux Enterprise Server 12 (x86_64)  
VERSION = 12  
PATCHLEVEL = 2  
# This file is deprecated and will be removed in a future service pack or  
release.  
# Please check /etc/os-release for details about this release.  
os-release:  
NAME="SLES"  
VERSION="12-SP2"  
VERSION_ID="12.2"  
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"  
ID="sles"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:12:sp2"  
  
uname -a:  
Linux linux-r1zd 4.10.8-4.geb4ae7d-default #1 SMP PREEMPT Tue Apr 4 10:46:31  
UTC 2017 (eb4ae7d) x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Apr 7 10:27  
  
SPEC is set to: /root/cpu2006-1.2  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
 /dev/sda2        xfs   458G   13G  446G   3% /  
Additional information from dmidecode:  
  
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.  
  
BIOS Dell Inc. 2.0.8 01/12/2017  
Memory:  
4x 002C0000002C 18ASF2G72AZ-2G3B1 16 GB 2 rank 2400 MHz  
  
(End of data from sysinfo program)
```



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = Not Run

PowerEdge T330 (Intel Xeon E3-1230 v6, 3.50 GHz)

SPECint\_rate\_base2006 = 257

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

## Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hammer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T330 (Intel Xeon E3-1230 v6, 3.50 GHz)

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 257

Test date: Apr-2017

Hardware Availability: Apr-2017

Software Availability: Sep-2016

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 2 14:05:09 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 May 2017.