



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp®\_rate2006 = 766**

Altos R380 F3 (Intel Xeon E5-2650 v4)

**SPECfp\_rate\_base2006 = 766**

CPU2006 license: 97


Test date: May-2017

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2016

Tested by: Acer Incorporated

Software Availability: Sep-2016

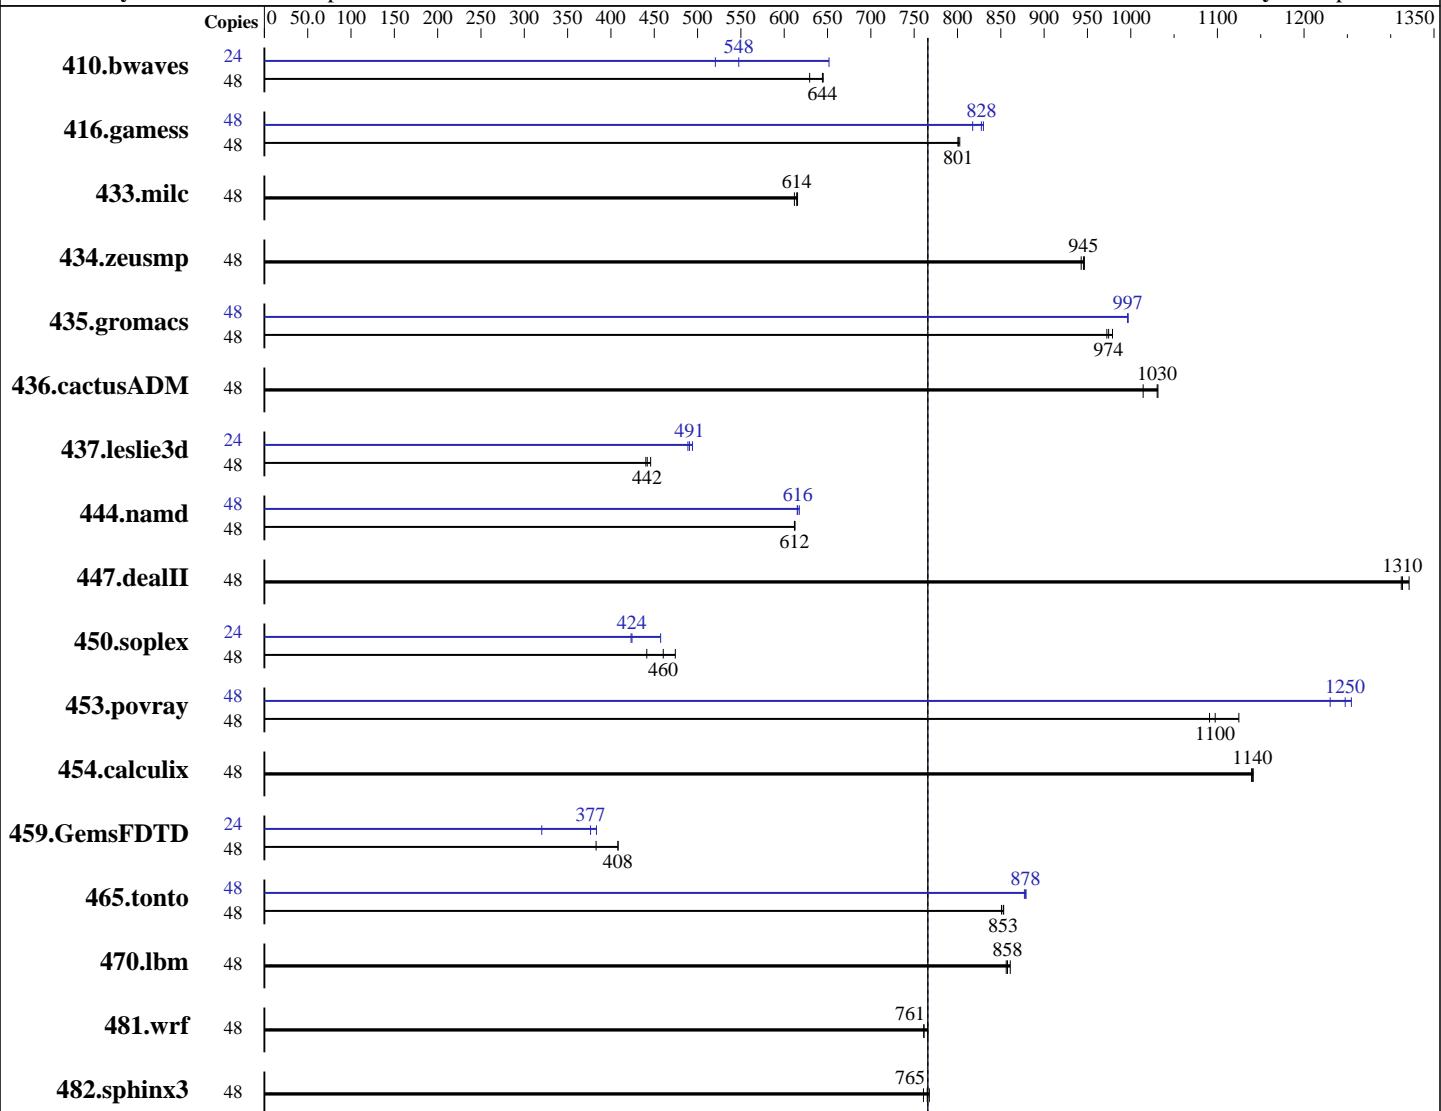

**SPECfp\_rate\_base2006 = 766**

**SPECfp\_rate2006 = 766**

## Hardware

CPU Name: Intel Xeon E5-2650 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 Compiler: 3.10.0-514.el7.x86\_64  
 C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 766**

Altos R380 F3 (Intel Xeon E5-2650 v4)

**SPECfp\_rate\_base2006 = 766**

CPU2006 license: 97

Test date: May-2017

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2016

Tested by: Acer Incorporated

Software Availability: Sep-2016

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: 1 x 4000 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1011	645	1036	629	<b>1013</b>	<b>644</b>	24	<b>596</b>	<b>548</b>	500	652	627	521
416.gamess	48	<b>1173</b>	<b>801</b>	1171	803	1174	801	48	1132	830	1150	818	<b>1136</b>	<b>828</b>
433.milc	48	<b>717</b>	<b>614</b>	716	615	720	612	48	<b>717</b>	<b>614</b>	716	615	720	612
434.zeusmp	48	463	943	<b>462</b>	<b>945</b>	461	947	48	463	943	<b>462</b>	<b>945</b>	461	947
435.gromacs	48	<b>352</b>	<b>974</b>	350	979	352	972	48	344	997	344	996	<b>344</b>	<b>997</b>
436.cactusADM	48	<b>557</b>	<b>1030</b>	556	1030	566	1010	48	<b>557</b>	<b>1030</b>	556	1030	566	1010
437.leslie3d	48	1025	440	1012	446	<b>1021</b>	<b>442</b>	24	461	489	<b>460</b>	<b>491</b>	457	494
444.namd	48	628	613	629	612	<b>629</b>	<b>612</b>	48	626	615	<b>625</b>	<b>616</b>	623	617
447.dealII	48	<b>418</b>	<b>1310</b>	418	1310	416	1320	48	<b>418</b>	<b>1310</b>	418	1310	416	1320
450.soplex	48	<b>870</b>	<b>460</b>	844	474	907	441	24	438	457	<b>472</b>	<b>424</b>	473	423
453.povray	48	<b>233</b>	<b>1100</b>	227	1120	234	1090	48	204	1250	<b>205</b>	<b>1250</b>	208	1230
454.calculix	48	347	1140	<b>347</b>	<b>1140</b>	348	1140	48	347	1140	<b>347</b>	<b>1140</b>	348	1140
459.GemsFDTD	48	1248	408	<b>1248</b>	<b>408</b>	1330	383	24	664	383	795	320	<b>676</b>	<b>377</b>
465.tonto	48	553	853	<b>554</b>	<b>853</b>	555	851	48	537	879	<b>538</b>	<b>878</b>	538	877
470.lbm	48	770	856	<b>769</b>	<b>858</b>	766	861	48	770	856	<b>769</b>	<b>858</b>	766	861
481.wrf	48	<b>704</b>	<b>761</b>	705	761	700	766	48	<b>704</b>	<b>761</b>	705	761	700	766
482.sphinx3	48	<b>1223</b>	<b>765</b>	1219	768	1230	761	48	<b>1223</b>	<b>765</b>	1219	768	1230	761

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
 CPU Power and Performance Policy set to Performance  
 C1E Autopromote set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 766

Altos R380 F3 (Intel Xeon E5-2650 v4)

SPECfp\_rate\_base2006 = 766

CPU2006 license: 97

Test date: May-2017

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2016

Tested by: Acer Incorporated

Software Availability: Sep-2016

## Platform Notes (Continued)

Set Fan Profile set to Performance  
Sysinfo program /usr/cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on localhost.localdomain Tue May 9 01:47:18 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 v4 @ 2.20GHz
        2 "physical id"s (chips)
        48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 12
        siblings : 24
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      131747392 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.3 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.3"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 8 13:52

```
SPEC is set to: /usr/cpu2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   3.7T   69G  3.6T   2% /
Additional information from dmidecode:
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 766**

Altos R380 F3 (Intel Xeon E5-2650 v4)

**SPECfp\_rate\_base2006 = 766**

CPU2006 license: 97

Test date: May-2017

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2016

Tested by: Acer Incorporated

Software Availability: Sep-2016

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.1 09/13/2016

Memory:

8x NO DIMM NO DIMM

8x Samsung M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 766**

Altos R380 F3 (Intel Xeon E5-2650 v4)

**SPECfp\_rate\_base2006 = 766**

CPU2006 license: 97

Test date: May-2017

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2016

Tested by: Acer Incorporated

Software Availability: Sep-2016

## Base Portability Flags (Continued)

```
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    450.soplex: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
    454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
    465.tonto: -DSPEC_CPU_LP64  
    470.lbm: -DSPEC_CPU_LP64  
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 766**

Altos R380 F3 (Intel Xeon E5-2650 v4)

**SPECfp\_rate\_base2006 = 766**

CPU2006 license: 97

Test date: May-2017

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2016

Tested by: Acer Incorporated

Software Availability: Sep-2016

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -D_FILE_OFFSET_BITS=64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xAVX(pass 2)
    -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -fno-alias -auto-ilp32
    -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xAVX(pass 2)
    -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -qopt-malloc-options=3
    -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xAVX(pass 2)
    -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3
```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 766**

Altos R380 F3 (Intel Xeon E5-2650 v4)

**SPECfp\_rate\_base2006 = 766**

CPU2006 license: 97

Test date: May-2017

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2016

Tested by: Acer Incorporated

Software Availability: Sep-2016

## Peak Optimization Flags (Continued)

410.bwaves: -xAVX -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xAVX(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xAVX(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xAVX(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 30 15:31:19 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 May 2017.