SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110i-S (Intel Xeon E3-1225 v6)

SPECfp®2006 = 99.2

SPECfp_base2006 = 97.7

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Mar-2017
Hardware Availability: Apr-2017
Software Availability: Jan-2017

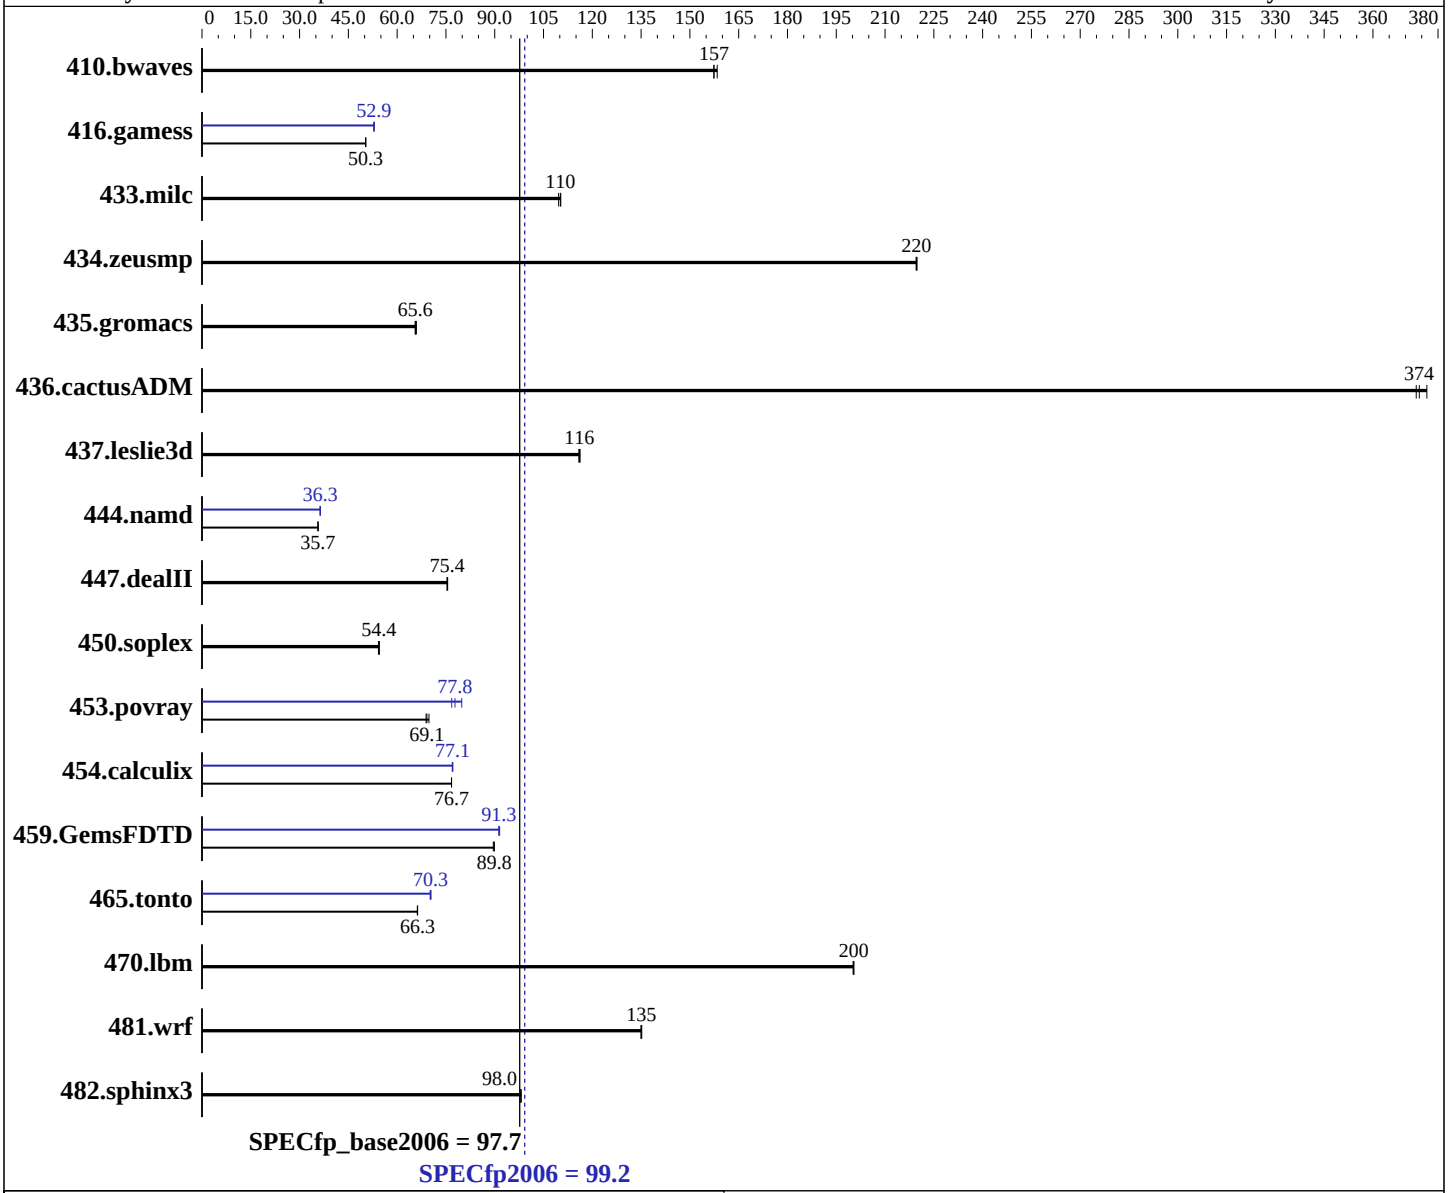

Hardware

CPU Name:	Intel Xeon E3-1225 v6
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.3 (Maipo) Kernel 3.10.0-514.6.1.el7.x86_64
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110i-S (Intel Xeon E3-1225 v6)

SPECfp2006 = 99.2

SPECfp_base2006 = 97.7

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Mar-2017
Hardware Availability: Apr-2017
Software Availability: Jan-2017

L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (2 x 16 GB 2Rx8 PC4-2400T-E)
Disk Subsystem:	1 x 1 TB SATA, 7200 RPM
Other Hardware:	None

System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**86.3**	**157**	85.8	158	86.4	157	**86.3**	**157**	85.8	158	86.4	157
416.gamess	389	50.3	389	50.3	**389**	**50.3**	371	52.8	**370**	**52.9**	370	52.9
433.milc	83.7	110	83.2	110	**83.3**	**110**	83.7	110	83.2	110	**83.3**	**110**
434.zeusmp	41.4	220	41.4	220	**41.4**	**220**	41.4	220	41.4	220	**41.4**	**220**
435.gromacs	108	65.9	109	65.5	**109**	**65.6**	108	65.9	109	65.5	**109**	**65.6**
436.cactusADM	31.7	377	32.0	373	**31.9**	**374**	31.7	377	32.0	373	**31.9**	**374**
437.leslie3d	81.1	116	80.9	116	**81.0**	**116**	81.1	116	80.9	116	**81.0**	**116**
444.namd	**225**	**35.7**	225	35.7	225	35.7	**221**	**36.3**	221	36.3	220	36.4
447.dealII	152	75.3	151	75.5	**152**	**75.4**	152	75.3	151	75.5	**152**	**75.4**
450.soplex	**153**	**54.4**	153	54.5	154	54.2	**153**	**54.4**	153	54.5	154	54.2
453.povray	77.2	68.9	**76.9**	**69.1**	76.2	69.8	66.6	79.9	**68.4**	**77.8**	69.3	76.8
454.calculix	**108**	**76.7**	108	76.7	108	76.7	107	77.1	**107**	**77.1**	107	76.9
459.GemsFDTD	118	89.9	**118**	**89.8**	118	89.6	**116**	**91.3**	116	91.3	116	91.5
465.tonto	**148**	**66.3**	149	66.2	148	66.3	**140**	**70.3**	140	70.4	140	70.1
470.lbm	68.6	200	68.6	200	**68.6**	**200**	68.6	200	68.6	200	**68.6**	**200**
481.wrf	**82.7**	**135**	82.8	135	82.6	135	**82.7**	**135**	82.8	135	82.6	135
482.sphinx3	199	98.1	199	97.8	**199**	**98.0**	199	98.1	199	97.8	**199**	**98.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
 Power Management Policy: Custom
 Energy Performance: Performance
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"
```

Continued on next page

General Notes (Continued)

```
OMP_NUM_THREADS = "4"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default.
```

Base Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`
482.sphinx3: `-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch`

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2)
`-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2)
`-no-prec-div`(pass 2) `-fno-alias -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 30 15:31:52 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 May 2017.