SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: Advanced Micro Devices)

HPE Cloudline CL3150,
AMD EPYC 7601

SPECfp®_rate2006 = 943

SPECfp_rate_base2006 = 850

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: May-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2016

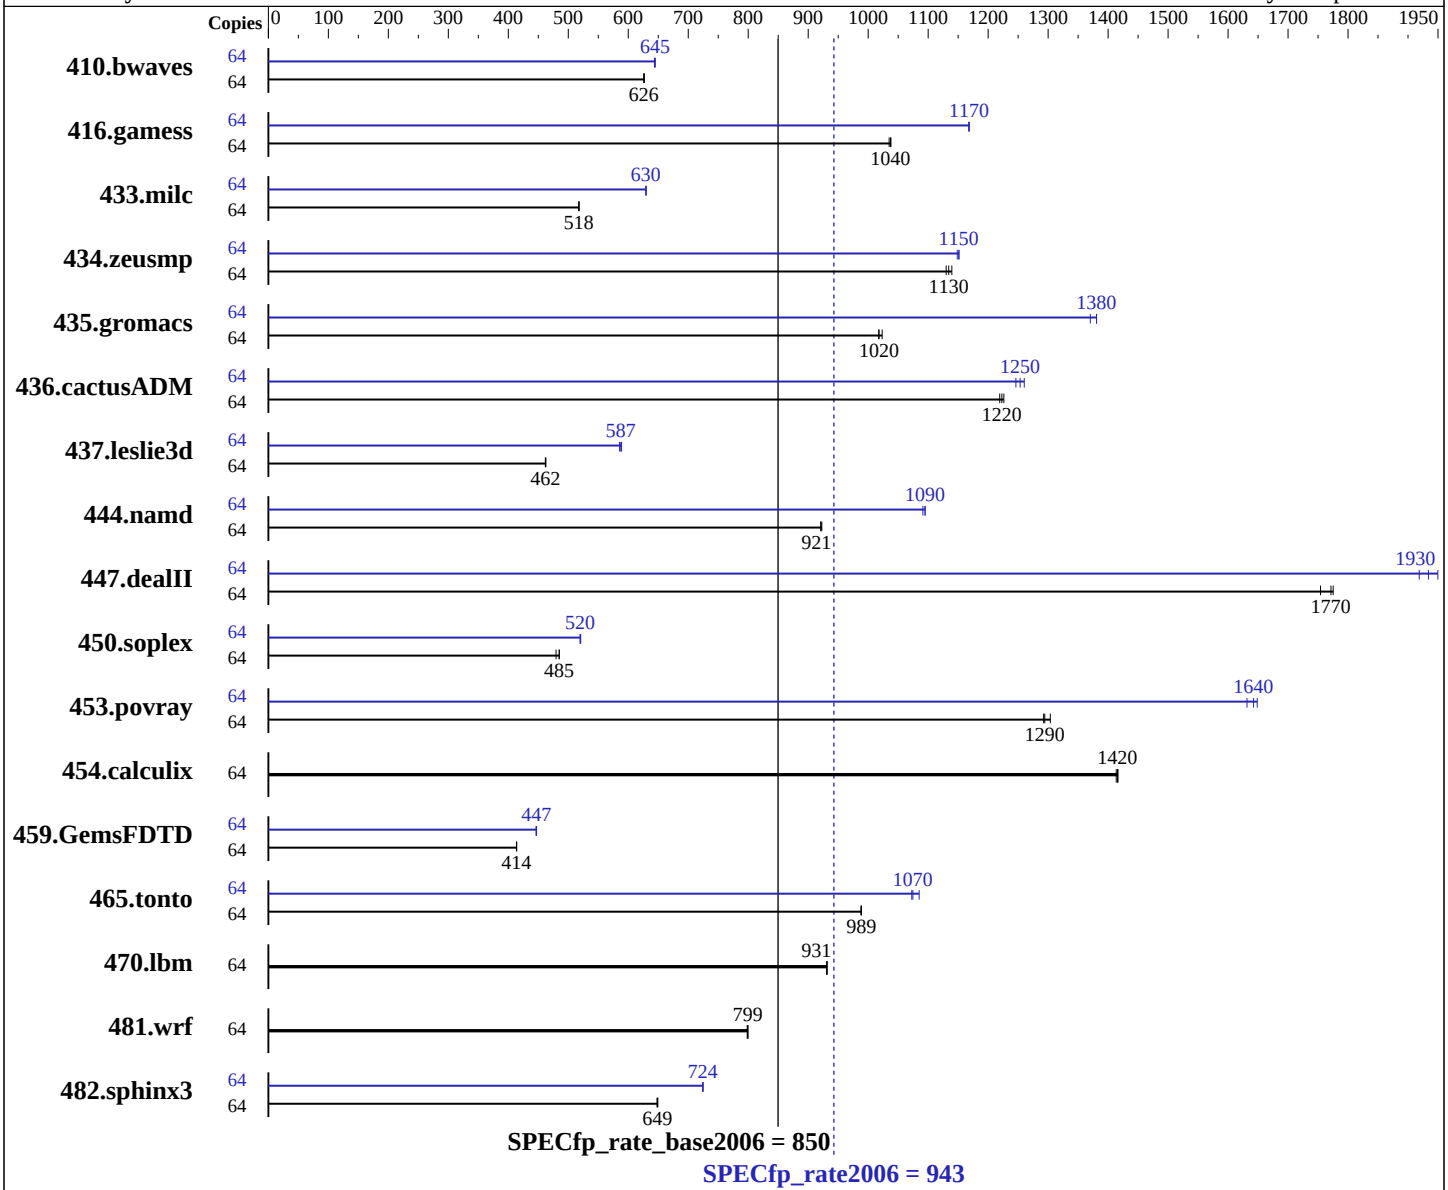

Hardware

CPU Name:	AMD EPYC 7601
CPU Characteristics:	AMD Turbo CORE technology up to 3.20 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	32 cores, 1 chip, 32 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	64 KB I + 32 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Ubuntu 16.04 LTS, Kernel 4.4.0-71.generic
Compiler:	C/C++/Fortran: Version 4.5.2.1 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: Advanced Micro Devices)

HPE Cloudline CL3150,
AMD EPYC 7601

SPECfp_rate2006 = 943

SPECfp_rate_base2006 = 850

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: May-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2016

L3 Cache: 64 MB I+D on chip per chip, 8 MB shared / 4 cores
Other Cache: None
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2667V-R)
Disk Subsystem: 1 x 500 GB SSD
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1388	627	1389	626	**1389**	**626**	64	1351	644	1349	645	**1349**	**645**
416.gamess	64	1207	1040	**1208**	**1040**	1211	1030	64	1072	1170	**1073**	**1170**	1073	1170
433.milc	64	1134	518	**1135**	**518**	1135	518	64	933	630	933	629	**933**	**630**
434.zeusmp	64	511	1140	515	1130	**513**	**1130**	64	506	1150	507	1150	**506**	**1150**
435.gromacs	64	**449**	**1020**	449	1020	447	1020	64	333	1370	**331**	**1380**	331	1380
436.cactusADM	64	624	1230	627	1220	**625**	**1220**	64	607	1260	614	1250	**610**	**1250**
437.leslie3d	64	1300	463	**1302**	**462**	1303	462	64	1027	586	1022	589	**1024**	**587**
444.namd	64	**557**	**921**	557	921	556	923	64	470	1090	**469**	**1090**	469	1090
447.dealII	64	412	1780	417	1750	**413**	**1770**	64	376	1950	**379**	**1930**	382	1920
450.soplex	64	**1101**	**485**	1113	480	1101	485	64	**1026**	**520**	1025	521	1027	520
453.povray	64	263	1290	261	1300	**263**	**1290**	64	209	1630	207	1650	**207**	**1640**
454.calculix	64	**373**	**1420**	373	1420	374	1410	64	**373**	**1420**	373	1420	374	1410
459.GemsFDTD	64	1640	414	**1641**	**414**	1642	414	64	**1520**	**447**	1519	447	1521	446
465.tonto	64	637	988	637	989	**637**	**989**	64	**586**	**1070**	587	1070	580	1090
470.lbm	64	945	931	**944**	**931**	944	932	64	945	931	**944**	**931**	944	932
481.wrf	64	**894**	**799**	896	798	894	799	64	**894**	**799**	896	798	894	799
482.sphinx3	64	1921	649	1925	648	**1923**	**649**	64	**1722**	**724**	1723	724	1721	725

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runspec
```

Continued on next page

Operating System Notes (Continued)

Transparent huge pages were enabled for this run (OS default)

Platform Notes

The Linux run level was 3; sysinfo run-level is incorrect.
The dmidecode memory speed information is incorrect.

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1603-rate-libs-revA/32:/root/work/cpu2006/amd1603-rate-libs-revA/64"
The binaries were built with the AMD supported x86 Open64 Compiler Suite,
which is only available from AMD at
http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/
Binaries were compiled on a system with 2x AMD Opteron 6378 chips + 128GB Memory using RHEL 6.3
Submitted_by: "Smith, Van" <Van.Smith@amd.com>
Submitted: Mon Jun 5 12:38:47 EDT 2017
Submission: cpu2006-20170529-47128.sub
Submitted_by: "Smith, Van" <Van.Smith@amd.com>
Submitted: Thu Jun 8 15:44:26 EDT 2017
Submission: cpu2006-20170529-47128.sub

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-WB, -Wl, -z,muldefs

C++ benchmarks:
-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4
-mno-xop -mno-tbm -WB, -Wl, -z,muldefs

Fortran benchmarks:
-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1 -mno-fma4
-mno-xop -mno-tbm -WB, -Wl, -z,muldefs

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-WB, -Wl, -z,muldefs -LNO:blocking=off -LNO:simd_peel_align=on
-OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1 -mno-fma4

470.lbm: basepeak = yes

482.sphinx3: -Ofast -m32 -IPA:plimit=1000 -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2 -WB, -mno-fma4 -mno-tbm -mno-xop

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver2
-mno-fma4 -WB, -mno-xop -mno-tbm

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1 -mno-fma4

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2 -mno-fma4 -WB, -mno-xop -mno-tbm -Wl,
-z,muldefs

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver2 -mno-fma4

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-WOPT:sib=on -march=bdver1 -mno-fma4

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bdt=2m:heap=2m -march=bdver2 -mno-fma4

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bdt=2m:heap=2m -mso -march=bdver1 -mno-fma4

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1 -mno-fma4

465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bdt=2m:heap=2m -march=bdver2 -WB, -mno-fma4 -mno-tbm
-mno-xop

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: `-Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m -CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on -march=bdver2 -mno-fma4 -LNO:simd=3`

436.cactusADM: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0 -LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver2 -mno-fma4`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 5 18:32:05 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 June 2017.