SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740 (Intel Xeon Gold 6138, 2.00 GHz)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 1370

CPU2006 license:	55	**Test date:**	Jun-2017
Test sponsor:	Dell Inc.	**Hardware Availability:**	Jul-2017
Tested by:	Dell Inc.	**Software Availability:**	Nov-2016

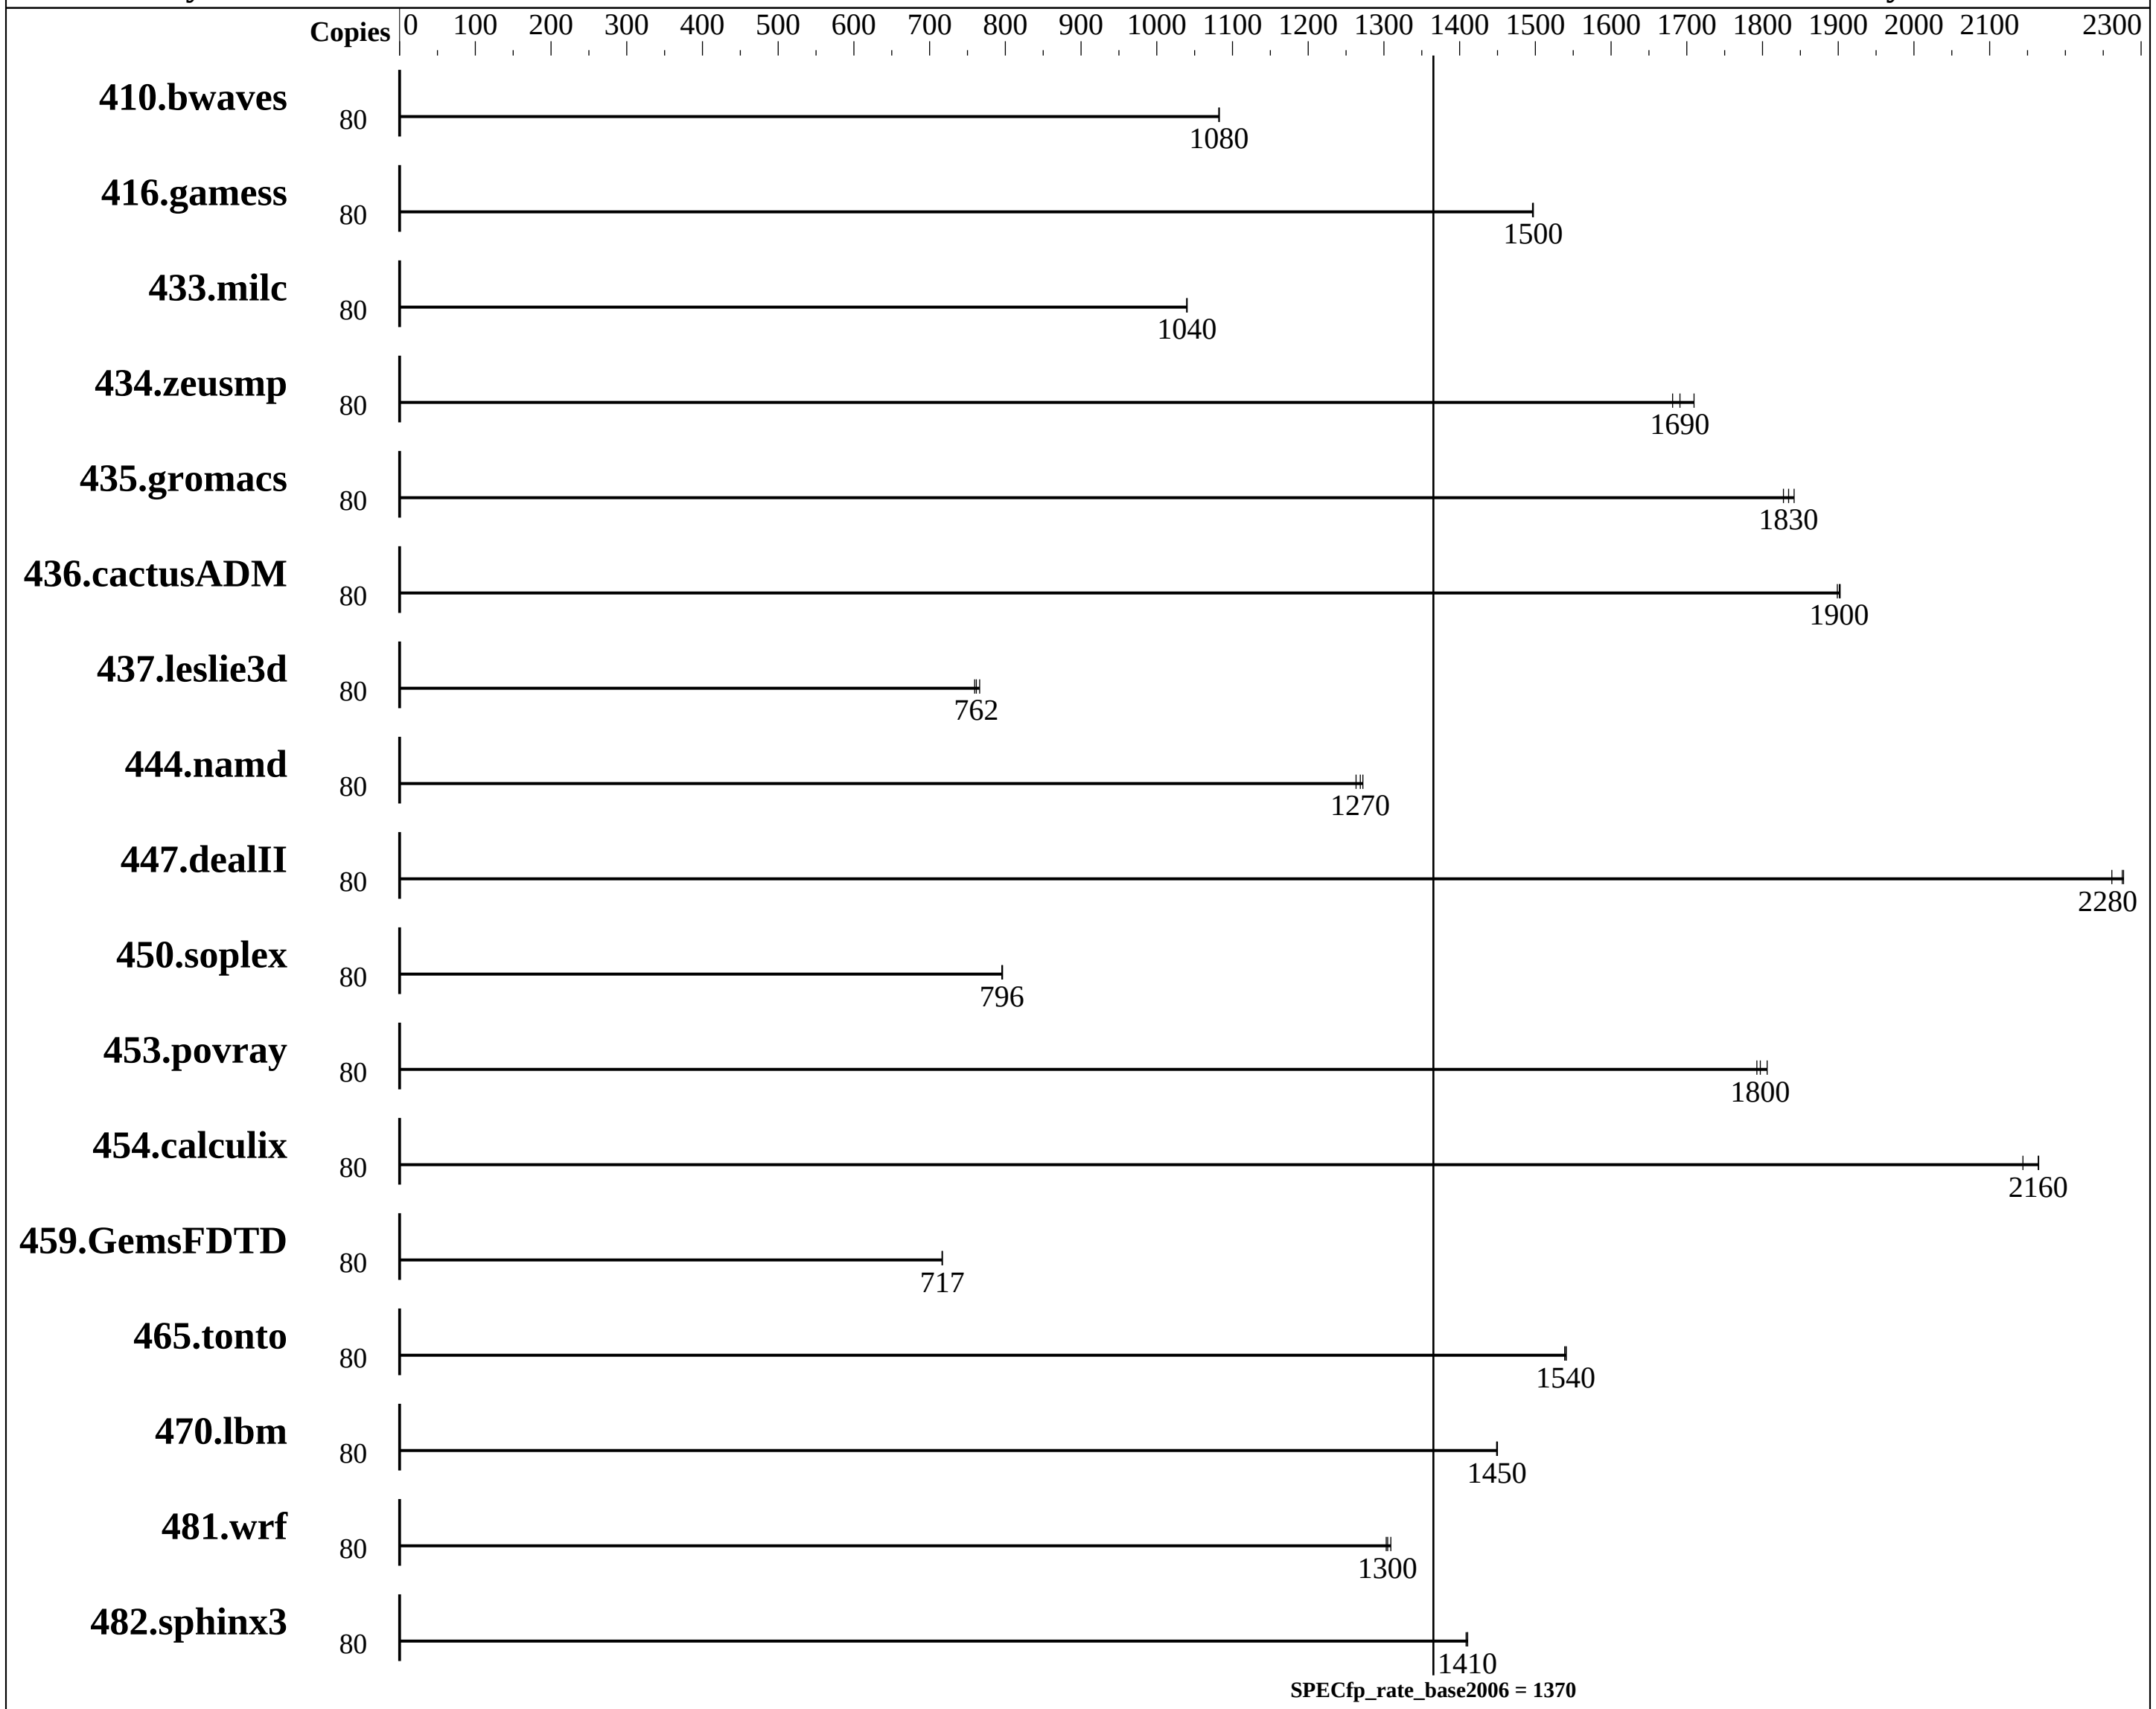

Hardware

CPU Name:	Intel Xeon Gold 6138
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	40 cores, 2 chips, 20 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.3 (Maipo) 3.10.0-514.el7.x86_64
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	xfs

Continued on next page

Dell Inc.

PowerEdge R740 (Intel Xeon Gold 6138, 2.00 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1370

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2017
Hardware Availability: Jul-2017
Software Availability: Nov-2016

L3 Cache: 27.5 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 960 GB SATA SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	1004	1080	**1005**	**1080**	1005	1080							
416.gamess	80	1046	1500	**1046**	**1500**	1047	1500							
433.milc	80	707	1040	706	1040	**706**	**1040**							
434.zeusmp	80	433	1680	426	1710	**431**	**1690**							
435.gromacs	80	**311**	**1830**	313	1830	310	1840							
436.cactusADM	80	**503**	**1900**	502	1900	503	1900							
437.leslie3d	80	**987**	**762**	982	766	990	759							
444.namd	80	**506**	**1270**	508	1260	504	1270							
447.dealII	80	402	2280	405	2260	**402**	**2280**							
450.soplex	80	839	795	**839**	**796**	838	796							
453.povray	80	237	1790	236	1810	**237**	**1800**							
454.calculix	80	**305**	**2160**	305	2160	308	2140							
459.GemsFDTD	80	**1184**	**717**	1185	716	1184	717							
465.tonto	80	511	1540	**511**	**1540**	512	1540							
470.lbm	80	758	1450	759	1450	**758**	**1450**							
481.wrf	80	683	1310	686	1300	**685**	**1300**							
482.sphinx3	80	1107	1410	**1106**	**1410**	1105	1410							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Sub NUMA Cluster enabled
Virtualization Technology disabled
```

Continued on next page

Platform Notes (Continued)

```
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to autonomous
C1E disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Logical Processor enabled
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
Sysinfo program /cpu2006-1.2_ic17u3/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on localhost.localdomain Fri Jun  2 17:55:36 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz
      2 "physical id"s (chips)
      80 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 20
      siblings  : 40
      physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
      physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
   cache size : 28160 KB

From /proc/meminfo
   MemTotal:       394870516 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.3 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.3"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
```

Continued on next page

Platform Notes (Continued)

```
      EDT 2016 x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Jun 2 11:56

   SPEC is set to: /cpu2006-1.2_ic17u3
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda2      xfs   838G  7.4G  831G   1% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS Dell Inc. 1.0.0 05/16/2017
     Memory:
      24x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666 MHz

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006-1.2_ic17u3/lib/ia32:/cpu2006-1.2_ic17u3/lib/intel64:/cpu2006-1.2_ic17u3/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revB.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jul 12 12:12:08 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 July 2017.