SPEC® CFP2006 Result

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8180, 2.50GHz

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 7000

CPU2006 license: 19		**Test date:**	Jun-2017
Test sponsor:	Fujitsu	**Hardware Availability:**	Jul-2017
Tested by:	Fujitsu	**Software Availability:**	Apr-2017

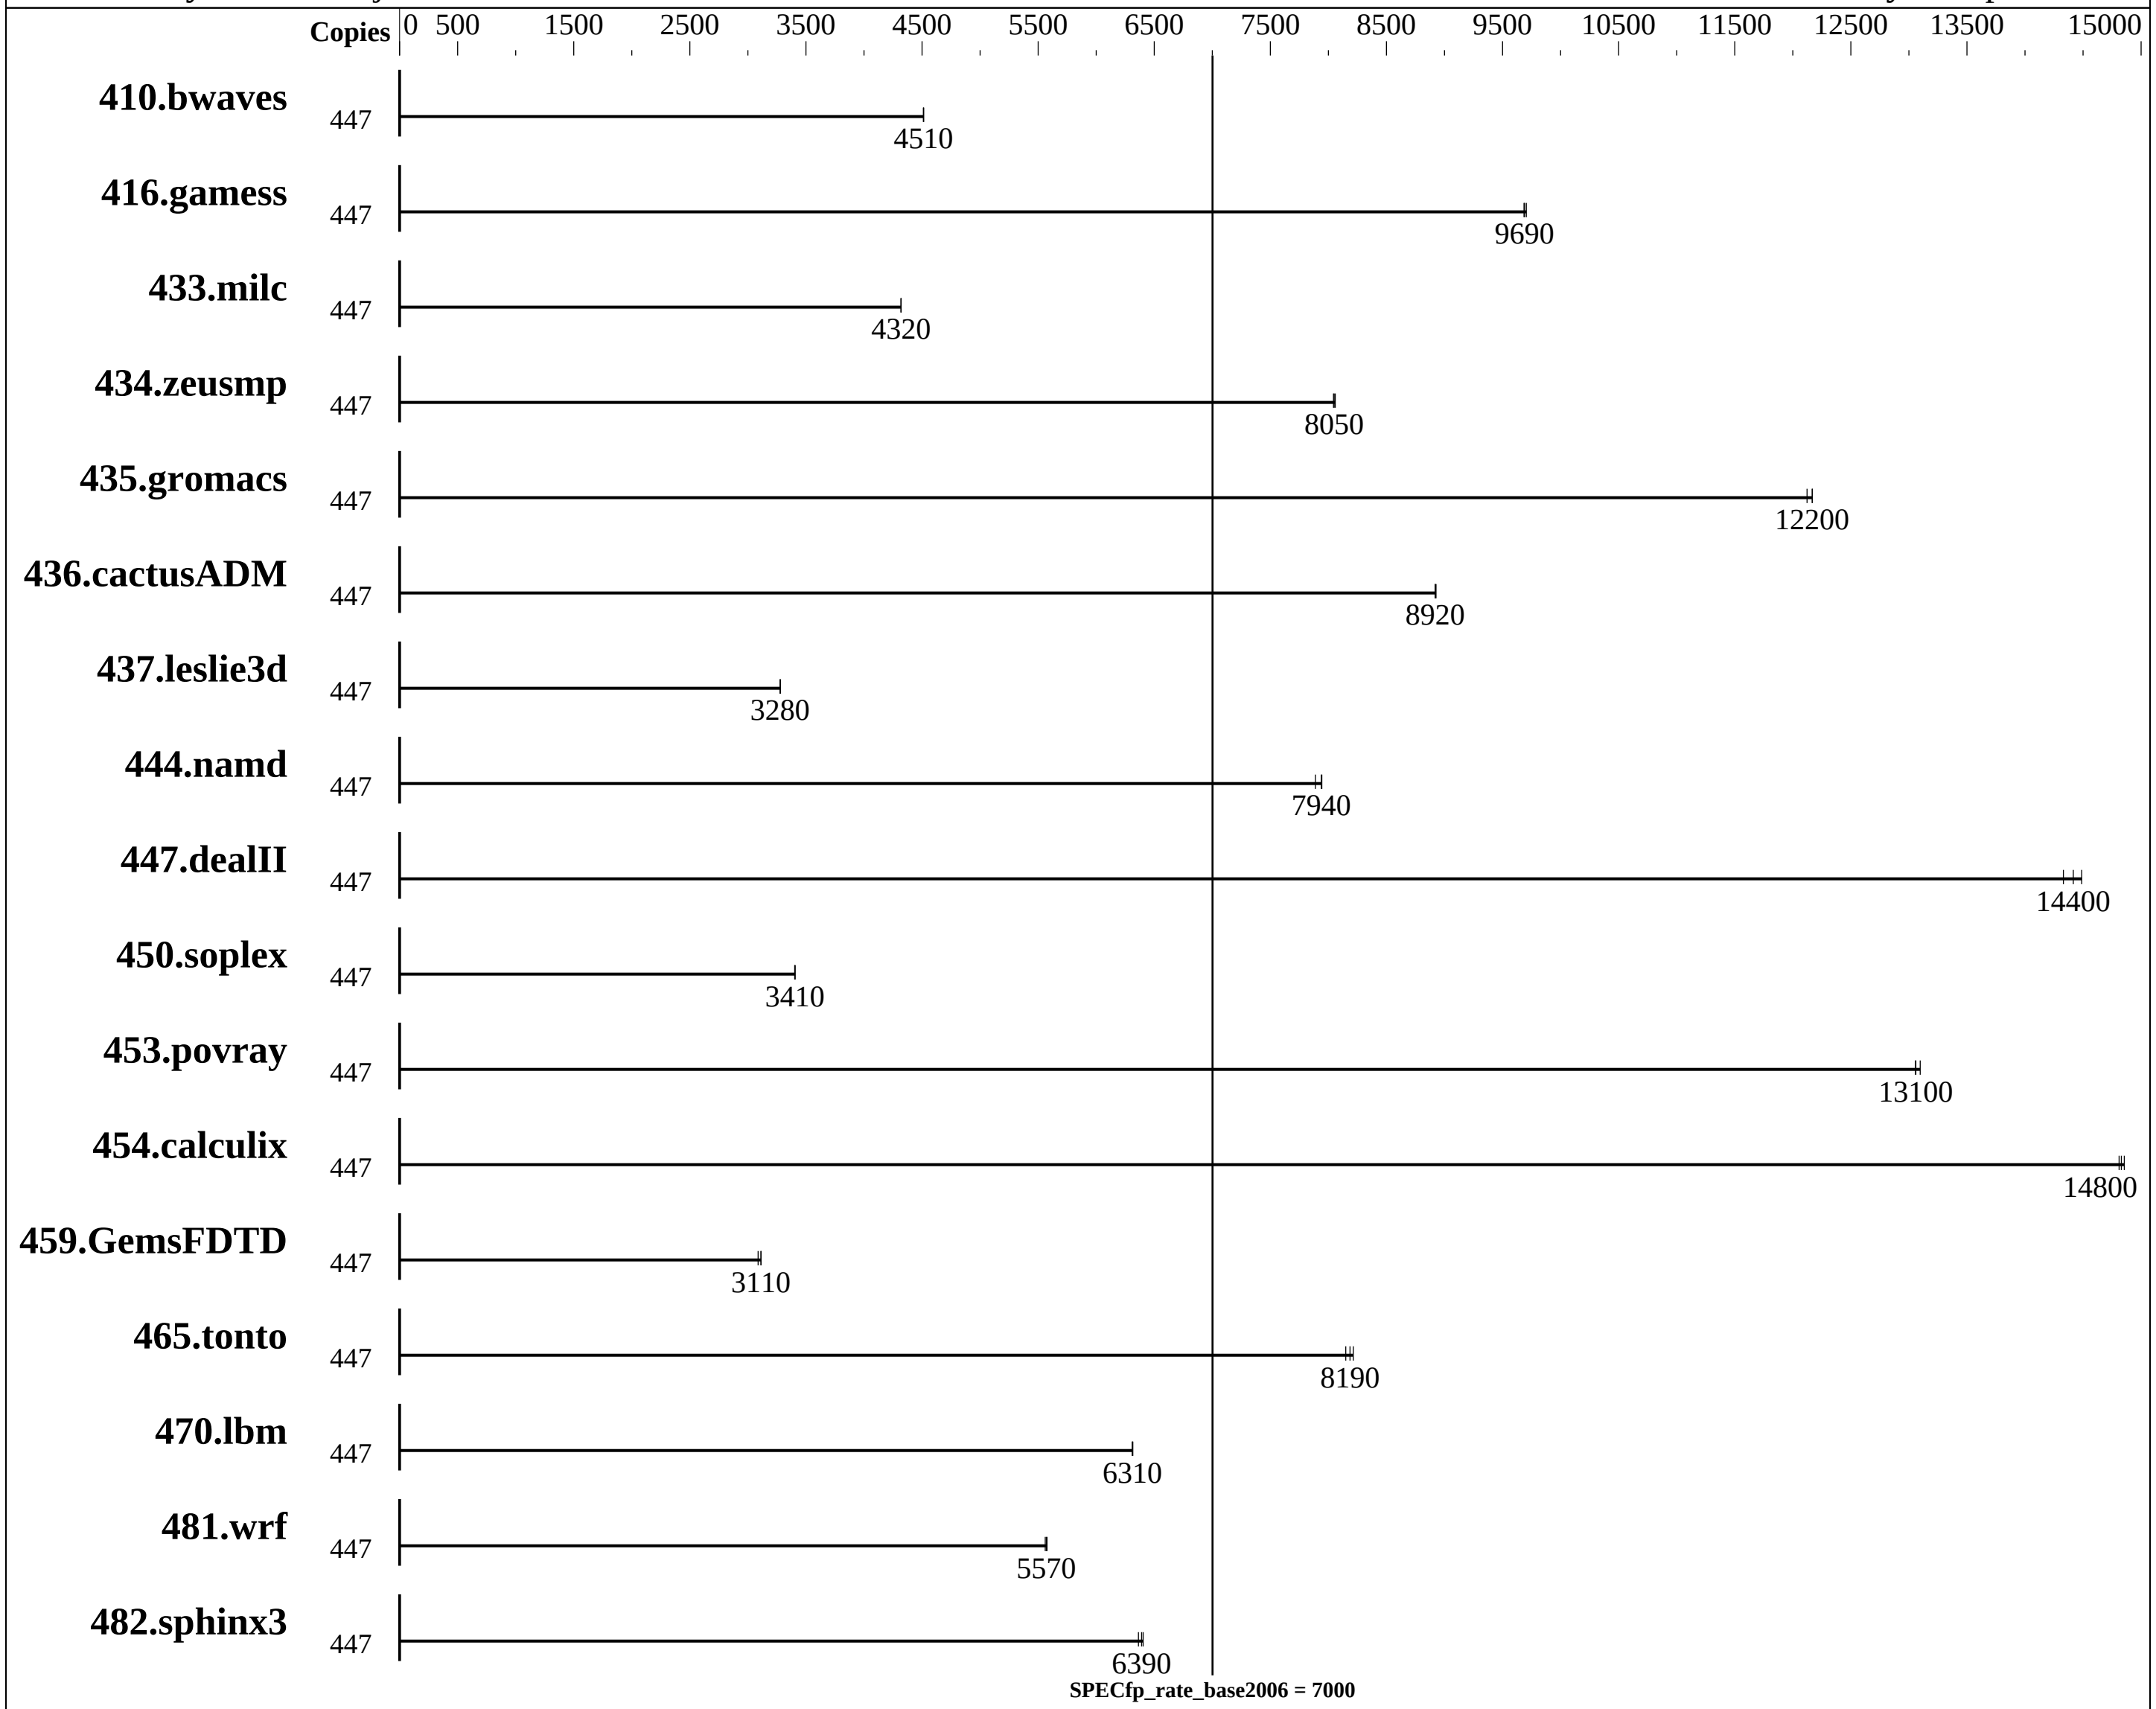

Hardware

CPU Name:	Intel Xeon Platinum 8180
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	224 cores, 8 chips, 28 cores/chip, 2 threads/core
CPU(s) orderable:	2,4,6,8 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	tmpfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8180, 2.50GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 7000

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jun-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2017

L3 Cache:	38.5 MB I+D on chip per chip
Other Cache:	None
Memory:	3 TB (96 x 32 GB 2Rx4 PC4-2666V-R)
Disk Subsystem:	6044 GB tmpfs
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	447	**1346**	**4510**	1346	4510	1346	4510							
416.gamess	447	902	9700	**903**	**9690**	904	9680							
433.milc	447	950	4320	**950**	**4320**	950	4320							
434.zeusmp	447	505	8060	**505**	**8050**	506	8040							
435.gromacs	447	**262**	**12200**	262	12200	263	12100							
436.cactusADM	447	**599**	**8920**	598	8930	599	8920							
437.leslie3d	447	**1282**	**3280**	1281	3280	1282	3280							
444.namd	447	451	7940	**452**	**7940**	454	7890							
447.dealII	447	**355**	**14400**	357	14300	353	14500							
450.soplex	447	1095	3400	1094	3410	**1095**	**3410**							
453.povray	447	182	13100	182	13100	**182**	**13100**							
454.calculix	447	248	14900	249	14800	**249**	**14800**							
459.GemsFDTD	447	1536	3090	**1524**	**3110**	1524	3110							
465.tonto	447	540	8150	535	8210	**537**	**8190**							
470.lbm	447	972	6320	**973**	**6310**	973	6310							
481.wrf	447	895	5580	**896**	**5570**	898	5560							
482.sphinx3	447	1360	6400	**1363**	**6390**	1369	6360							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-447 isolcpus=1-447
Turbo mode set with:
cpupower -c all frequency-set -g performance
Tmpfs filesystem can be set with:
mkdir /home/memory
mount -t tmpfs -o size=6044g,rw tmpfs /home/memory
Process tunning setting:
```

Continued on next page

Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
echo always > /sys/kernel/mm/transparent_hugepage/enabled
cpu idle state set with:
cpupower idle-set -d 2
cpupower idle-set -d 3
```

Platform Notes

```
BIOS configuration:
Intel Virtualization Technology = Disabled
Enable CPU HWPM = Disabled
Override OS Energy Performance = Enabled
Utilization Profile = Unbalanced
Stale AtoS = Enabled
LLC dead line alloc = Disabled
Sysinfo program /home/memory/SPECcpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-k55j Sun Jun 25 13:04:30 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
      8 "physical id"s (chips)
      448 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
   cache size : 39424 KB
```

Continued on next page

Platform Notes (Continued)

```
 From /proc/meminfo
    MemTotal:       3169249540 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or
       release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux linux-k55j 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
    (9464f67) x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Jun 25 04:19

 SPEC is set to: /home/memory/SPECcpu
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  6.0T  7.0G  5.9T   1% /home/memory
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS FUJITSU V1.0.0.0 R0.43.5 for D9989-B2x            06/23/2017
   Memory:
    96x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/memory/SPECcpu/lib/ia32:/home/memory/SPECcpu/lib/intel64:/home/memory/SPECcpu/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
```

Continued on next page

General Notes (Continued)

```
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -qopt-mem-layout-trans=3`

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Mon Oct 2 17:05:11 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 July 2017.