SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530M4, Intel Xeon Platinum 8180, 2.50GHz

SPECfp®_rate2006 = 1800

SPECfp_rate_base2006 = 1770

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jun-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2017

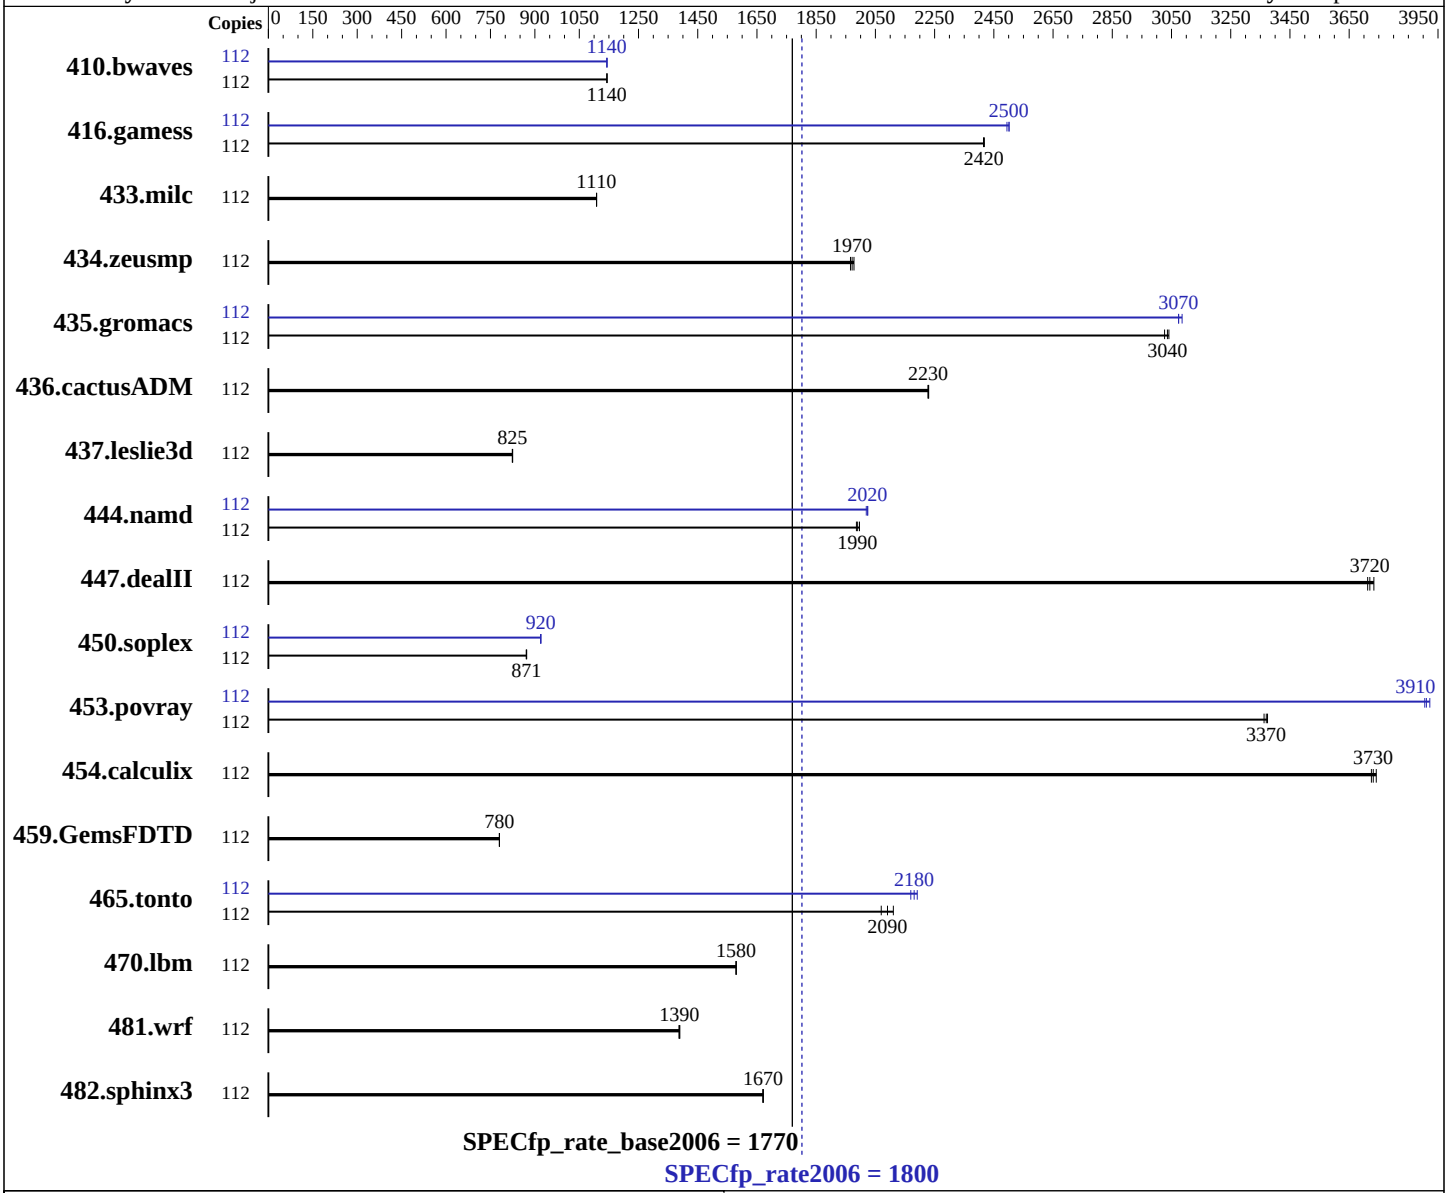

Hardware

CPU Name:	Intel Xeon Platinum 8180
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	56 cores, 2 chips, 28 cores/chip, 2 threads/core
CPU(s) orderable:	2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	tmpfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530M4, Intel Xeon Platinum 8180, 2.50GHz

SPECfp_rate2006 = 1800

SPECfp_rate_base2006 = 1770

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jun-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2017

L3 Cache: 38.5 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)
Disk Subsystem: 752 GB tmpfs
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	112	**1331**	**1140**	1331	1140	1331	1140	112	1331	1140	**1331**	**1140**	1332	1140
416.gamess	112	**908**	**2420**	908	2420	907	2420	112	877	2500	**877**	**2500**	879	2490
433.milc	112	928	1110	**928**	**1110**	927	1110	112	928	1110	**928**	**1110**	927	1110
434.zeusmp	112	515	1980	**517**	**1970**	518	1970	112	515	1980	**517**	**1970**	518	1970
435.gromacs	112	**263**	**3040**	264	3030	263	3040	112	260	3070	259	3090	**260**	**3070**
436.cactusADM	112	601	2230	**601**	**2230**	600	2230	112	601	2230	**601**	**2230**	600	2230
437.leslie3d	112	1276	825	**1277**	**825**	1278	824	112	1276	825	**1277**	**825**	1278	824
444.namd	112	**451**	**1990**	450	2000	452	1990	112	445	2020	**444**	**2020**	444	2020
447.dealII	112	345	3710	343	3730	**344**	**3720**	112	345	3710	343	3730	**344**	**3720**
450.soplex	112	1072	871	**1072**	**871**	1071	872	112	1016	919	**1015**	**920**	1015	920
453.povray	112	**177**	**3370**	177	3360	177	3370	112	153	3910	**152**	**3910**	152	3920
454.calculix	112	**248**	**3730**	247	3740	248	3730	112	**248**	**3730**	247	3740	248	3730
459.GemsFDTD	112	1523	780	**1523**	**780**	1523	780	112	1523	780	**1523**	**780**	1523	780
465.tonto	112	**527**	**2090**	522	2110	532	2070	112	508	2170	503	2190	**505**	**2180**
470.lbm	112	974	1580	**974**	**1580**	974	1580	112	974	1580	**974**	**1580**	974	1580
481.wrf	112	**901**	**1390**	902	1390	900	1390	112	**901**	**1390**	902	1390	900	1390
482.sphinx3	112	1306	1670	1307	1670	**1306**	**1670**	112	1306	1670	1307	1670	**1306**	**1670**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-111
Turbo mode set with :
cpupower -c all frequency-set -g performance
Tmpfs filesystem can be set with:
mkdir /home/memory
mount -t tmpfs -o size=752g,rw tmpfs /home/memory
Process tunning setting:
```

Continued on next page

Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

Platform Notes

```
BIOS configuration:
Link Frequency Select = 10.4 GT/s
HWPM Support = Disabled
Intel Virtualization Technology = Disabled
Sub NUMA Clustering = Enabled
IMC Interleaving = 1-way
LLC Dead Line Alloc = Disabled
Stale AtoS = Enabled
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-vfzv Wed Jun 21 10:01:49 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
      2 "physical id"s (chips)
      112 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
   cache size : 39424 KB

From /proc/meminfo
   MemTotal:       394396000 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or
```

Continued on next page

Platform Notes (Continued)

```
        release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

  uname -a:
     Linux linux-vfzv 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
     (9464f67) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jun 20 23:15

  SPEC is set to: /home/memory/speccpu
     Filesystem     Type   Size  Used Avail Use% Mounted on
     tmpfs          tmpfs  752G  4.1G  748G   1% /home/memory
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.4.1 for D3383-A1x
    06/19/2017
    Memory:
     24x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64:/home/memory/speccpu/sh10.2"

  Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
  memory using Redhat Enterprise Linux 7.2
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
  Filesystem page cache cleared with:
  shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -qopt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-D_FILE_OFFSET_BITS=64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`
482.sphinx3: `-DSPEC_CPU_LP64`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -fno-alias -auto-ilp32 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-malloc-options=3 -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -auto -inline-calloc -qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32 -qopt-mem-layout-trans=3

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html`
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml`
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Mon Oct 2 17:05:15 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 July 2017.