



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## H3C

**SPECint®2006 = 77.8**

H3C UniServer R4900 G3 (Intel Xeon Gold 6140)

**SPECint\_base2006 = 74.5**

CPU2006 license: 9066


Test date: Aug-2017

Test sponsor: H3C

Hardware Availability: Jul-2017

Tested by: H3C

Software Availability: Sep-2016

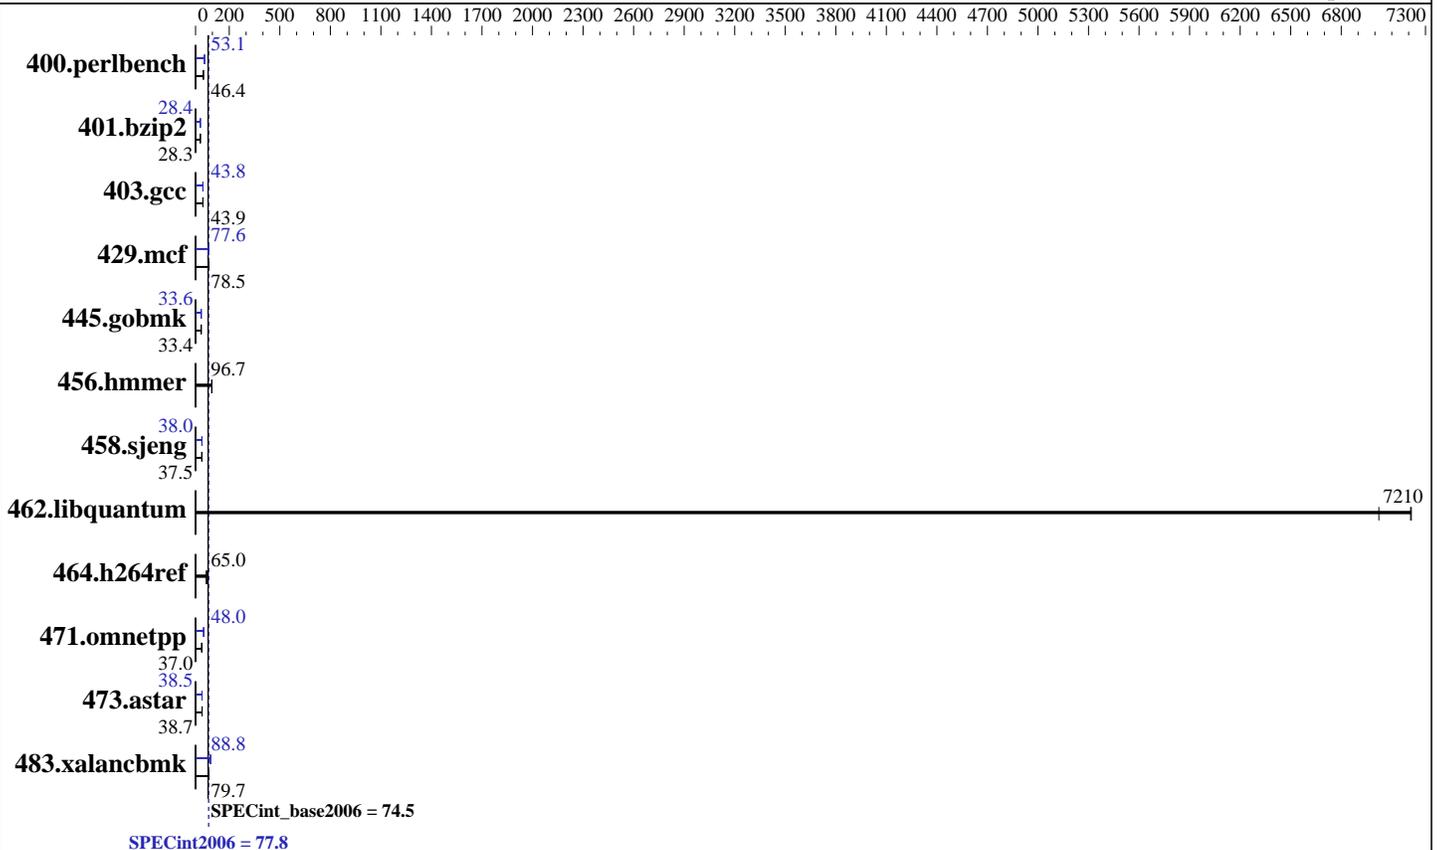

### Hardware

CPU Name: Intel Xeon Gold 6140  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 24.75 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Disk Subsystem: 1 x 480 GB SATA SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 Compiler: 3.10.0-514.26.2.el7.x86\_64 C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## H3C

SPECint2006 = **77.8**

H3C UniServer R4900 G3 (Intel Xeon Gold 6140)

SPECint\_base2006 = **74.5**

CPU2006 license: 9066

Test sponsor: H3C

Tested by: H3C

Test date: Aug-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2016

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	211	46.4	210	46.5	<b><u>211</u></b>	<b><u>46.4</u></b>	185	52.8	184	53.1	<b><u>184</u></b>	<b><u>53.1</u></b>
401.bzip2	342	28.2	<b><u>341</u></b>	<b><u>28.3</u></b>	341	28.3	340	28.4	<b><u>339</u></b>	<b><u>28.4</u></b>	339	28.4
403.gcc	183	44.1	<b><u>183</u></b>	<b><u>43.9</u></b>	184	43.8	184	43.8	<b><u>184</u></b>	<b><u>43.8</u></b>	184	43.9
429.mcf	<b><u>116</u></b>	<b><u>78.5</u></b>	115	79.1	117	78.2	<b><u>117</u></b>	<b><u>77.6</u></b>	117	77.8	119	76.7
445.gobmk	313	33.5	314	33.4	<b><u>314</u></b>	<b><u>33.4</u></b>	313	33.6	312	33.6	<b><u>312</u></b>	<b><u>33.6</u></b>
456.hammer	96.7	96.5	96.5	96.7	<b><u>96.5</u></b>	<b><u>96.7</u></b>	96.7	96.5	96.5	96.7	<b><u>96.5</u></b>	<b><u>96.7</u></b>
458.sjeng	323	37.5	323	37.5	<b><u>323</u></b>	<b><u>37.5</u></b>	319	38.0	318	38.0	<b><u>319</u></b>	<b><u>38.0</u></b>
462.libquantum	2.87	7220	2.95	7020	<b><u>2.87</u></b>	<b><u>7210</u></b>	2.87	7220	2.95	7020	<b><u>2.87</u></b>	<b><u>7210</u></b>
464.h264ref	340	65.2	340	65.0	<b><u>340</u></b>	<b><u>65.0</u></b>	340	65.2	340	65.0	<b><u>340</u></b>	<b><u>65.0</u></b>
471.omnetpp	168	37.1	<b><u>169</u></b>	<b><u>37.0</u></b>	171	36.5	<b><u>130</u></b>	<b><u>48.0</u></b>	130	47.9	130	48.2
473.astar	<b><u>181</u></b>	<b><u>38.7</u></b>	182	38.6	181	38.7	<b><u>182</u></b>	<b><u>38.5</u></b>	182	38.6	183	38.4
483.xalancbmk	86.5	79.7	86.6	79.7	<b><u>86.6</u></b>	<b><u>79.7</u></b>	<b><u>77.7</u></b>	<b><u>88.8</u></b>	77.6	88.9	77.9	88.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set SNC to Disabled  
Set Hyper-Threading to disabled  
Set ENERGY\_PERF\_BIAS\_CFG Mode to Performance  
Sysinfo program /home/spec/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on localhost.localdomain Sun Aug 20 09:12:47 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz  
2 "physical id"s (chips)  
36 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## H3C

**SPECint2006 = 77.8**

H3C UniServer R4900 G3 (Intel Xeon Gold 6140)

**SPECint\_base2006 = 74.5**

CPU2006 license: 9066

Test date: Aug-2017

Test sponsor: H3C

Hardware Availability: Jul-2017

Tested by: H3C

Software Availability: Sep-2016

### Platform Notes (Continued)

```

cpu cores : 18
siblings : 18
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 25344 KB

```

From /proc/meminfo

```

MemTotal:      394654768 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

```

uname -a:

```

Linux localhost.localdomain 3.10.0-514.26.2.el7.x86_64 #1 SMP Tue Jul 4
15:04:05 UTC 2017 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Aug 20 09:12

SPEC is set to: /home/spec

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda3        xfs      439G      42G  398G  10% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.00.17 08/01/2017

Memory:

24x Micron 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## H3C

SPECint2006 = 77.8

H3C UniServer R4900 G3 (Intel Xeon Gold 6140)

SPECint\_base2006 = 74.5

CPU2006 license: 9066

Test sponsor: H3C

Tested by: H3C

Test date: Aug-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2016

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/spec/libs/32:/home/spec/libs/64:/home/spec/sh10.2"

OMP\_NUM\_THREADS = "36"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2  
Transparent Huge Pages enabled by default.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
-auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## H3C

**SPECint2006 = 77.8**

H3C UniServer R4900 G3 (Intel Xeon Gold 6140)

**SPECint\_base2006 = 74.5**

CPU2006 license: 9066

Test sponsor: H3C

Tested by: H3C

Test date: Aug-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2016

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div -auto-ilp32 -qopt-prefetch

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## H3C

SPECint2006 = 77.8

H3C UniServer R4900 G3 (Intel Xeon Gold 6140)

SPECint\_base2006 = 74.5

CPU2006 license: 9066

Test sponsor: H3C

Tested by: H3C

Test date: Aug-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2016

## Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel  
-qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2)

456.hmmcr: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-ra-region-strategy=block  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/H3C-Platform-Settings-SKL-V1.1.20170906.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/H3C-Platform-Settings-SKL-V1.1.20170906.xml>



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## H3C

**SPECint2006 = 77.8**

H3C UniServer R4900 G3 (Intel Xeon Gold 6140)

**SPECint\_base2006 = 74.5**

**CPU2006 license:** 9066

**Test sponsor:** H3C

**Tested by:** H3C

**Test date:** Aug-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Sep 6 11:46:14 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 September 2017.