SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8160 2.10GHz)

SPECfp®_rate2006 = 3140

SPECfp_rate_base2006 = 3080

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Aug-2017
Hardware Availability: Aug-2017
Software Availability: Apr-2017

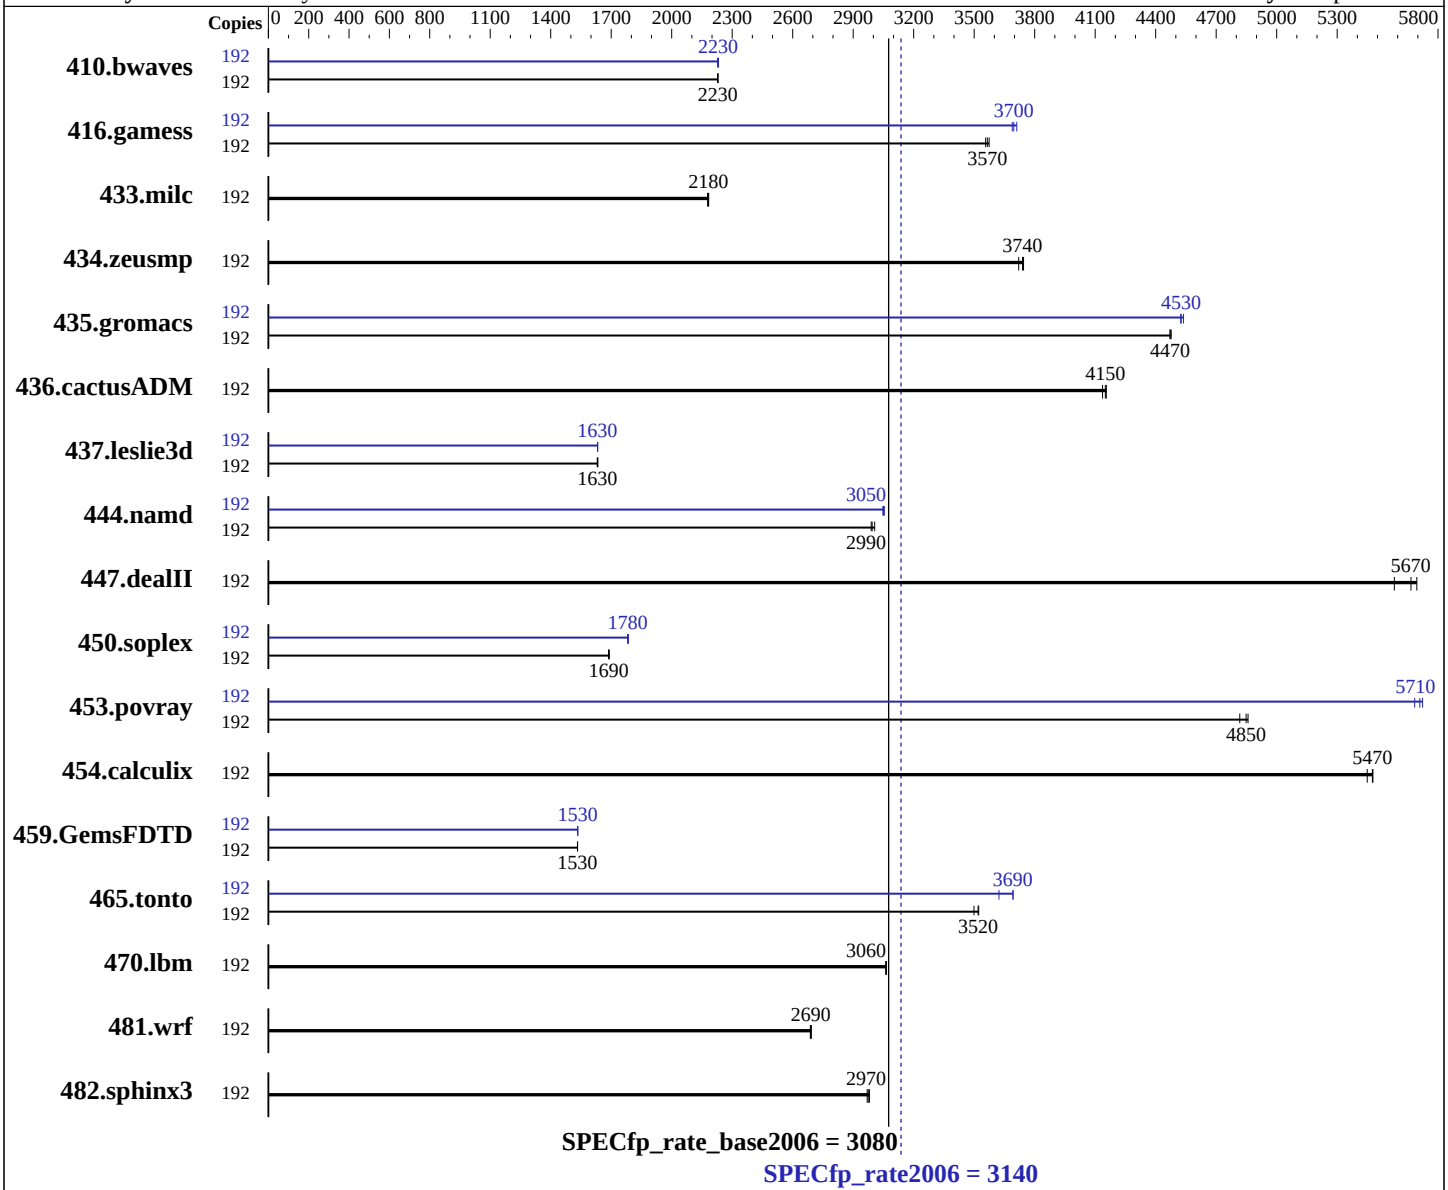

Hardware

CPU Name:	Intel Xeon Platinum 8160
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	96 cores, 4 chips, 24 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8160 2.10GHz)

SPECfp_rate2006 = 3140

SPECfp_rate_base2006 = 3080

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Aug-2017
Hardware Availability: Aug-2017
Software Availability: Apr-2017

L3 Cache: 33 MB I+D on chip per chip
Other Cache: None
Memory: 768 GB (48 x 16 GB 2Rx4 PC4-2666V-R)
Disk Subsystem: 1 x 600 GB SAS HDD, 10K RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	192	1171	2230	**1171**	**2230**	1170	2230	192	**1169**	**2230**	1171	2230	1169	2230
416.gamess	192	**1054**	**3570**	1052	3570	1057	3560	192	1019	3690	1013	3710	**1017**	**3700**
433.milc	192	809	2180	807	2180	**808**	**2180**	192	809	2180	807	2180	**808**	**2180**
434.zeusmp	192	467	3740	470	3720	**467**	**3740**	192	467	3740	470	3720	**467**	**3740**
435.gromacs	192	307	4470	**307**	**4470**	306	4480	192	302	4540	**303**	**4530**	303	4520
436.cactusADM	192	555	4140	552	4160	**553**	**4150**	192	555	4140	552	4160	**553**	**4150**
437.leslie3d	192	1104	1630	1107	1630	**1106**	**1630**	192	1106	1630	**1105**	**1630**	1105	1630
444.namd	192	515	2990	512	3010	**514**	**2990**	192	**505**	**3050**	504	3050	505	3050
447.dealII	192	386	5700	**388**	**5670**	393	5580	192	386	5700	**388**	**5670**	393	5580
450.soplex	192	**948**	**1690**	949	1690	947	1690	192	**898**	**1780**	899	1780	897	1790
453.povray	192	210	4860	**211**	**4850**	212	4820	192	**179**	**5710**	178	5720	180	5680
454.calculix	192	**289**	**5470**	289	5480	291	5450	192	**289**	**5470**	289	5480	291	5450
459.GemsFDTD	192	1329	1530	**1329**	**1530**	1329	1530	192	1328	1530	1328	1530	**1328**	**1530**
465.tonto	192	**537**	**3520**	536	3520	540	3500	192	512	3690	521	3620	**512**	**3690**
470.lbm	192	861	3060	**861**	**3060**	862	3060	192	861	3060	**861**	**3060**	862	3060
481.wrf	192	798	2690	**797**	**2690**	796	2690	192	798	2690	**797**	**2690**	796	2690
482.sphinx3	192	**1258**	**2970**	1260	2970	1256	2980	192	**1258**	**2970**	1260	2970	1256	2980

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Intel HyperThreading Technology set to Enabled
CPU performance set to Enterprise
```

Continued on next page

Platform Notes (Continued)

```
Power Performance Tuning set to OS
SNC set to Enabled
IMC Interleaving set to 1-way Interleave
Patrol Scrub set to Disabled
 Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-nvug Mon Aug  7 18:13:31 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
       4 "physical id"s (chips)
       192 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 24
       siblings  : 48
       physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
       27 28 29
       physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
       27 28 29
       physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
       27 28 29
       physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
       27 28 29
    cache size : 33792 KB

 From /proc/meminfo
    MemTotal:       791191660 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or
       release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

Continued on next page

Platform Notes (Continued)

```
uname -a:
   Linux linux-nvug 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
   (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 7 16:00

SPEC is set to: /home/cpu2006-1.2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      xfs   644G   96G  549G  15% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS Cisco Systems, Inc. C480M5.3.1.0.248.0518171057 05/18/2017
  Memory:
   48x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Continued on next page

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-malloc-options=3 -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -auto -inline-calloc -qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32 -qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Sep 6 11:46:12 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 September 2017.