SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Platinum 8164, 2.00GHz)

SPECfp®_rate2006 = 1650

SPECfp_rate_base2006 = 1620

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Aug-2017
Hardware Availability: Aug-2017
Software Availability: Apr-2017

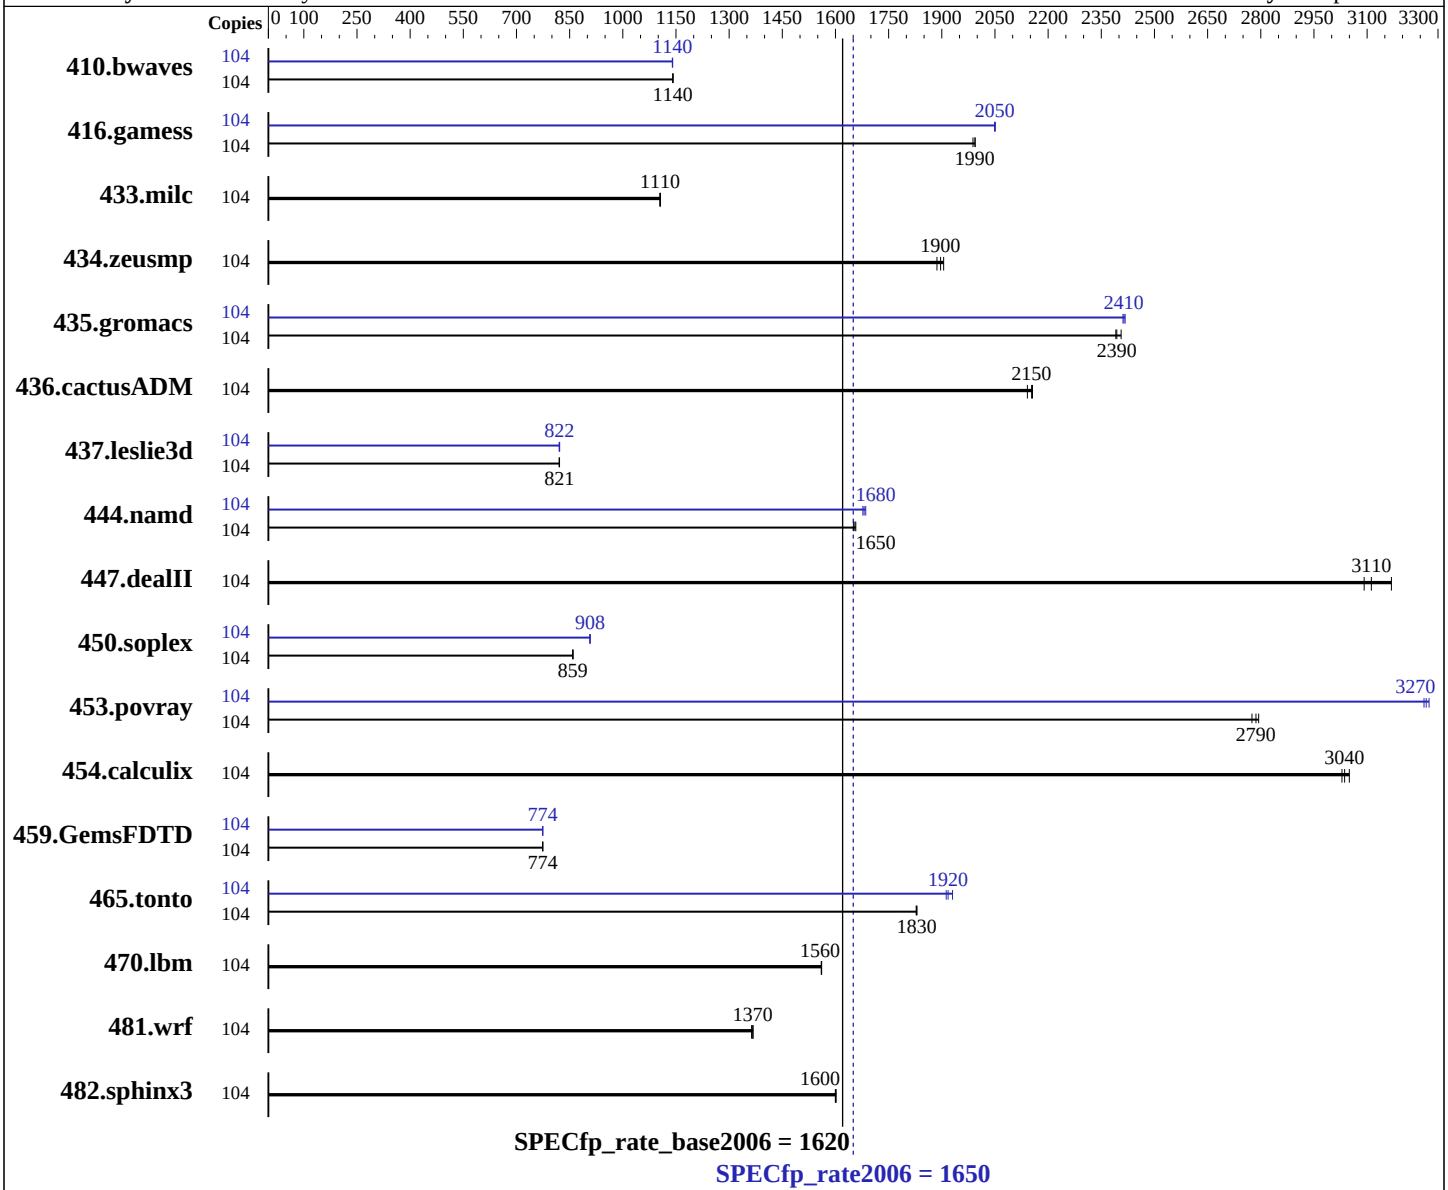

Hardware

CPU Name:	Intel Xeon Platinum 8164
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	52 cores, 2 chips, 26 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Platinum 8164, 2.00GHz)

SPECfp_rate2006 = 1650

SPECfp_rate_base2006 = 1620

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Aug-2017
Hardware Availability: Aug-2017
Software Availability: Apr-2017

L3 Cache: 35.75 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)
Disk Subsystem: 1 x 900 GB SAS 10K RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	104	**1238**	**1140**	1238	1140	1239	1140	104	**1240**	**1140**	1239	1140	1240	1140
416.gamess	104	1024	1990	1021	1990	**1021**	**1990**	104	993	2050	994	2050	**993**	**2050**
433.milc	104	864	1100	863	1110	**863**	**1110**	104	864	1100	863	1110	**863**	**1110**
434.zeusmp	104	502	1890	497	1910	**499**	**1900**	104	502	1890	497	1910	**499**	**1900**
435.gromacs	104	311	2390	**310**	**2390**	309	2410	104	**308**	**2410**	308	2410	307	2420
436.cactusADM	104	580	2140	**577**	**2150**	576	2160	104	580	2140	**577**	**2150**	576	2160
437.leslie3d	104	1190	821	**1191**	**821**	1192	820	104	1192	820	**1190**	**822**	1190	822
444.namd	104	503	1660	505	1650	**504**	**1650**	104	497	1680	**496**	**1680**	495	1690
447.dealII	104	375	3170	**382**	**3110**	385	3090	104	375	3170	**382**	**3110**	385	3090
450.soplex	104	**1010**	**859**	1010	859	1009	859	104	955	908	956	907	**956**	**908**
453.povray	104	198	2790	**199**	**2790**	199	2780	104	170	3260	**169**	**3270**	169	3270
454.calculix	104	281	3050	**283**	**3040**	283	3030	104	281	3050	**283**	**3040**	283	3030
459.GemsFDTD	104	**1426**	**774**	1426	774	1425	774	104	1425	774	1426	774	**1425**	**774**
465.tonto	104	559	1830	**559**	**1830**	560	1830	104	535	1910	**534**	**1920**	530	1930
470.lbm	104	916	1560	915	1560	**916**	**1560**	104	916	1560	915	1560	**916**	**1560**
481.wrf	104	849	1370	**850**	**1370**	852	1360	104	849	1370	**850**	**1370**	852	1360
482.sphinx3	104	**1267**	**1600**	1267	1600	1265	1600	104	**1267**	**1600**	1267	1600	1265	1600

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Intel HyperThreading Technology set to Enabled
CPU performance set to Enterprise
```

Continued on next page

Platform Notes (Continued)

```
Power Performance Tuning set to OS
SNC set to Enabled
IMC Interleaving set to 1-way Interleave
Patrol Scrub set to Disabled
 Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-ox2h Fri Aug 18 23:10:22 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
       2 "physical id"s (chips)
       104 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 26
       siblings  : 52
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
       26 27 28 29
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
       26 27 28 29
    cache size : 36608 KB

 From /proc/meminfo
    MemTotal:       394653040 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP2

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or
       release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

Continued on next page

Platform Notes (Continued)

```
uname -a:
   Linux linux-ox2h 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
   (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 18 23:08

SPEC is set to: /home/cpu2006-1.2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sdb5      xfs   317G  8.2G  309G   3% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS Cisco Systems, Inc. C220M5.3.1.1d.0.0615170645 06/15/2017
  Memory:
   24x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-malloc-options=3 -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -auto -inline-calloc -qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32 -qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Platinum 8164, 2.00GHz)

SPECfp_rate2006 = 1650

SPECfp_rate_base2006 = 1620

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Aug-2017
Hardware Availability: Aug-2017
Software Availability: Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Sep 6 11:46:50 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 September 2017.