SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Silver 4114, 2.20GHz)

SPECfp®_rate2006 = 850

SPECfp_rate_base2006 = 835

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Aug-2017
Hardware Availability: Aug-2017
Software Availability: Apr-2017

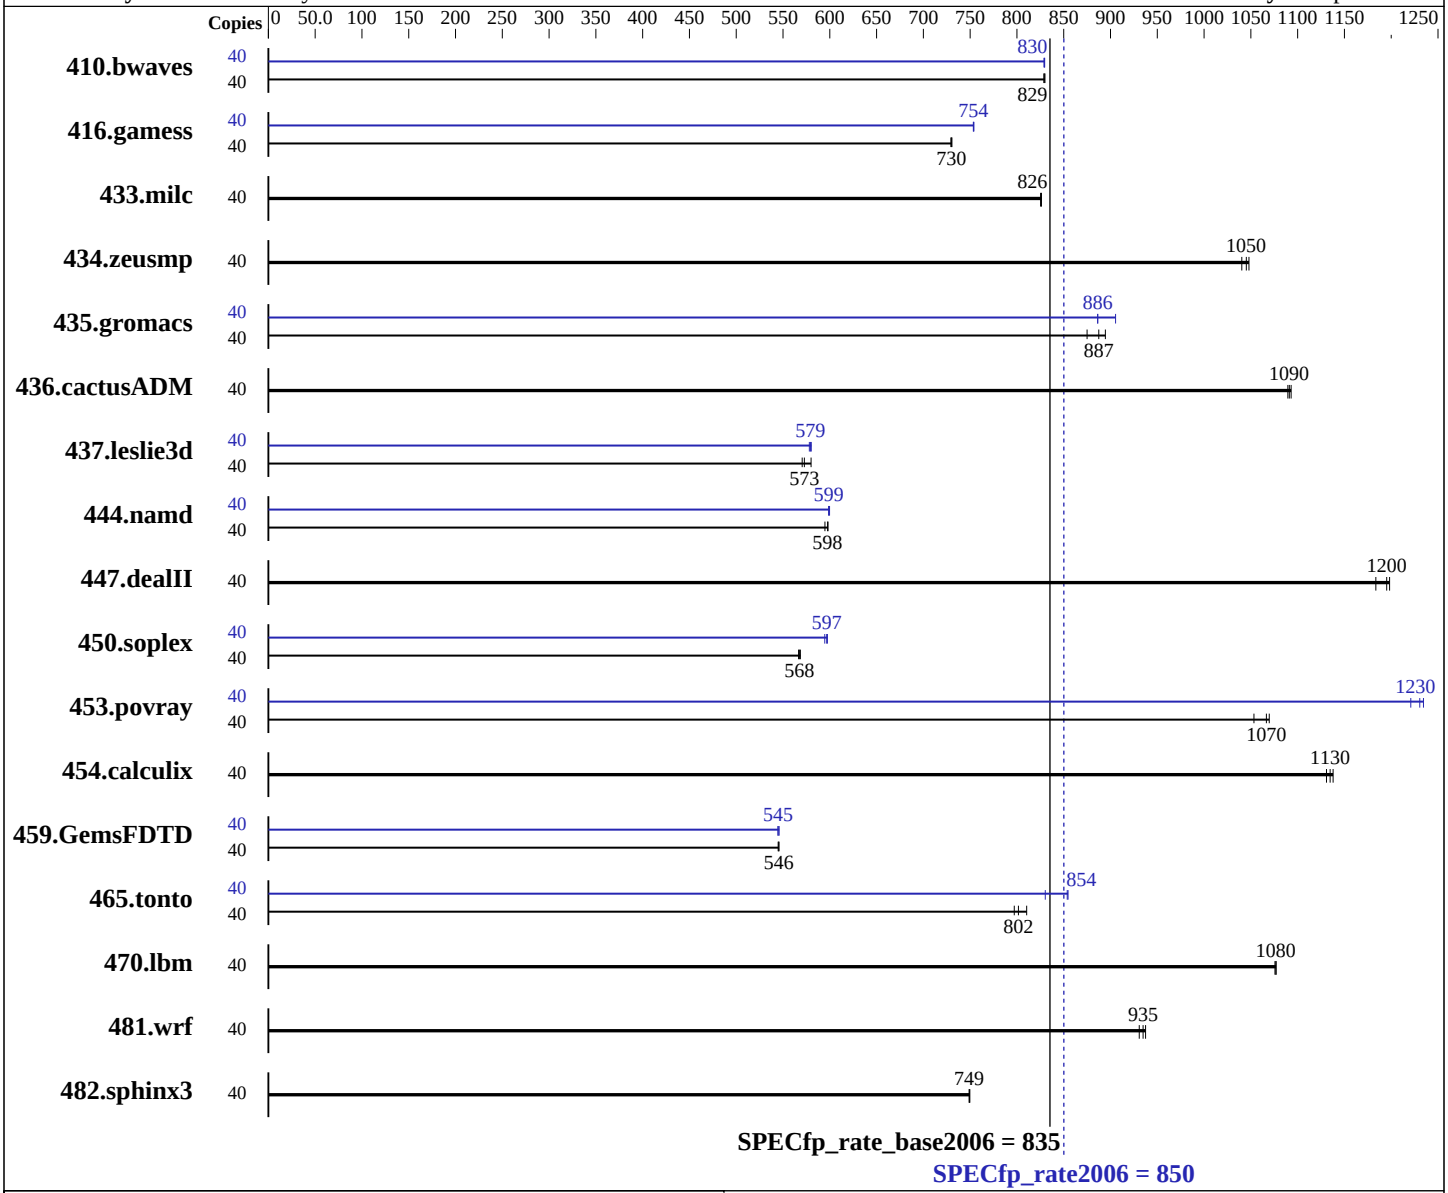

Hardware

CPU Name:	Intel Xeon Silver 4114
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Silver 4114, 2.20GHz)

SPECfp_rate2006 = 850

SPECfp_rate_base2006 = 835

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Aug-2017
Hardware Availability: Aug-2017
Software Availability: Apr-2017

L3 Cache: 13.75 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R, running at 2400 MHz)
Disk Subsystem: 1 x 800 GB SSD SAS
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	656	829	655	830	**656**	**829**	40	656	829	655	830	**655**	**830**
416.gamess	40	**1073**	**730**	1072	730	1074	729	40	1040	753	1039	754	**1039**	**754**
433.milc	40	445	825	444	826	**445**	**826**	40	445	825	444	826	**445**	**826**
434.zeusmp	40	347	1050	**348**	**1050**	350	1040	40	347	1050	**348**	**1050**	350	1040
435.gromacs	40	**322**	**887**	319	895	326	875	40	**322**	**886**	322	886	315	905
436.cactusADM	40	437	1090	**438**	**1090**	439	1090	40	437	1090	**438**	**1090**	439	1090
437.leslie3d	40	**656**	**573**	648	580	659	570	40	648	580	650	578	**649**	**579**
444.namd	40	**537**	**598**	536	598	539	595	40	536	599	**535**	**599**	535	600
447.dealII	40	382	1200	**383**	**1200**	387	1180	40	382	1200	**383**	**1200**	387	1180
450.soplex	40	587	569	589	567	**588**	**568**	40	561	595	**559**	**597**	558	597
453.povray	40	202	1050	**200**	**1070**	199	1070	40	**173**	**1230**	174	1220	172	1230
454.calculix	40	**291**	**1130**	292	1130	290	1140	40	**291**	**1130**	292	1130	290	1140
459.GemsFDTD	40	778	546	779	545	**778**	**546**	40	777	546	779	545	**779**	**545**
465.tonto	40	**491**	**802**	494	797	486	810	40	**461**	**854**	474	830	461	855
470.lbm	40	**510**	**1080**	511	1080	510	1080	40	**510**	**1080**	511	1080	510	1080
481.wrf	40	477	937	**478**	**935**	480	931	40	477	937	**478**	**935**	480	931
482.sphinx3	40	**1041**	**749**	1041	749	1040	750	40	**1041**	**749**	1041	749	1040	750

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Intel HyperThreading Technology set to Enabled
CPU performance set to Enterprise
Power Performance Tuning set to OS
SNC set to Enabled
IMC Interleaving set to 1-way Interleave
Patrol Scrub set to Disabled
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-0s5q Thu Aug 31 23:19:47 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
       2 "physical id"s (chips)
       40 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 10
       siblings  : 20
       physical 0: cores 0 1 2 3 4 8 9 10 11 12
       physical 1: cores 0 1 2 3 4 8 9 10 11 12
    cache size : 14080 KB

 From /proc/meminfo
    MemTotal:       394864292 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or
       release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux linux-0s5q 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
```

Continued on next page

Platform Notes (Continued)

```
      (9464f67) x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Aug 31 10:33

   SPEC is set to: /opt/cpu2006-1.2
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sdb2      xfs   700G   60G  640G   9% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS Cisco Systems, Inc. C240M5.3.1.1d.0.0615170707 06/15/2017
     Memory:
      24x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz, configured at 2400 MHz

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/lib/ia32:/opt/cpu2006-1.2/lib/intel64:/opt/cpu2006-1.2/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-malloc-options=3 -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -auto -inline-calloc -qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32 -qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Silver 4114, 2.20GHz)

SPECfp_rate2006 = 850

SPECfp_rate_base2006 = 835

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Aug-2017
Hardware Availability: Aug-2017
Software Availability: Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Sep 20 11:03:23 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 September 2017.