SPEC® CFP2006 Result

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Gold 6148, 2.40GHz

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 1480

CPU2006 license:	19	**Test date:**	Oct-2017
Test sponsor:	Fujitsu	**Hardware Availability:**	Jul-2017
Tested by:	Fujitsu	**Software Availability:**	Apr-2017

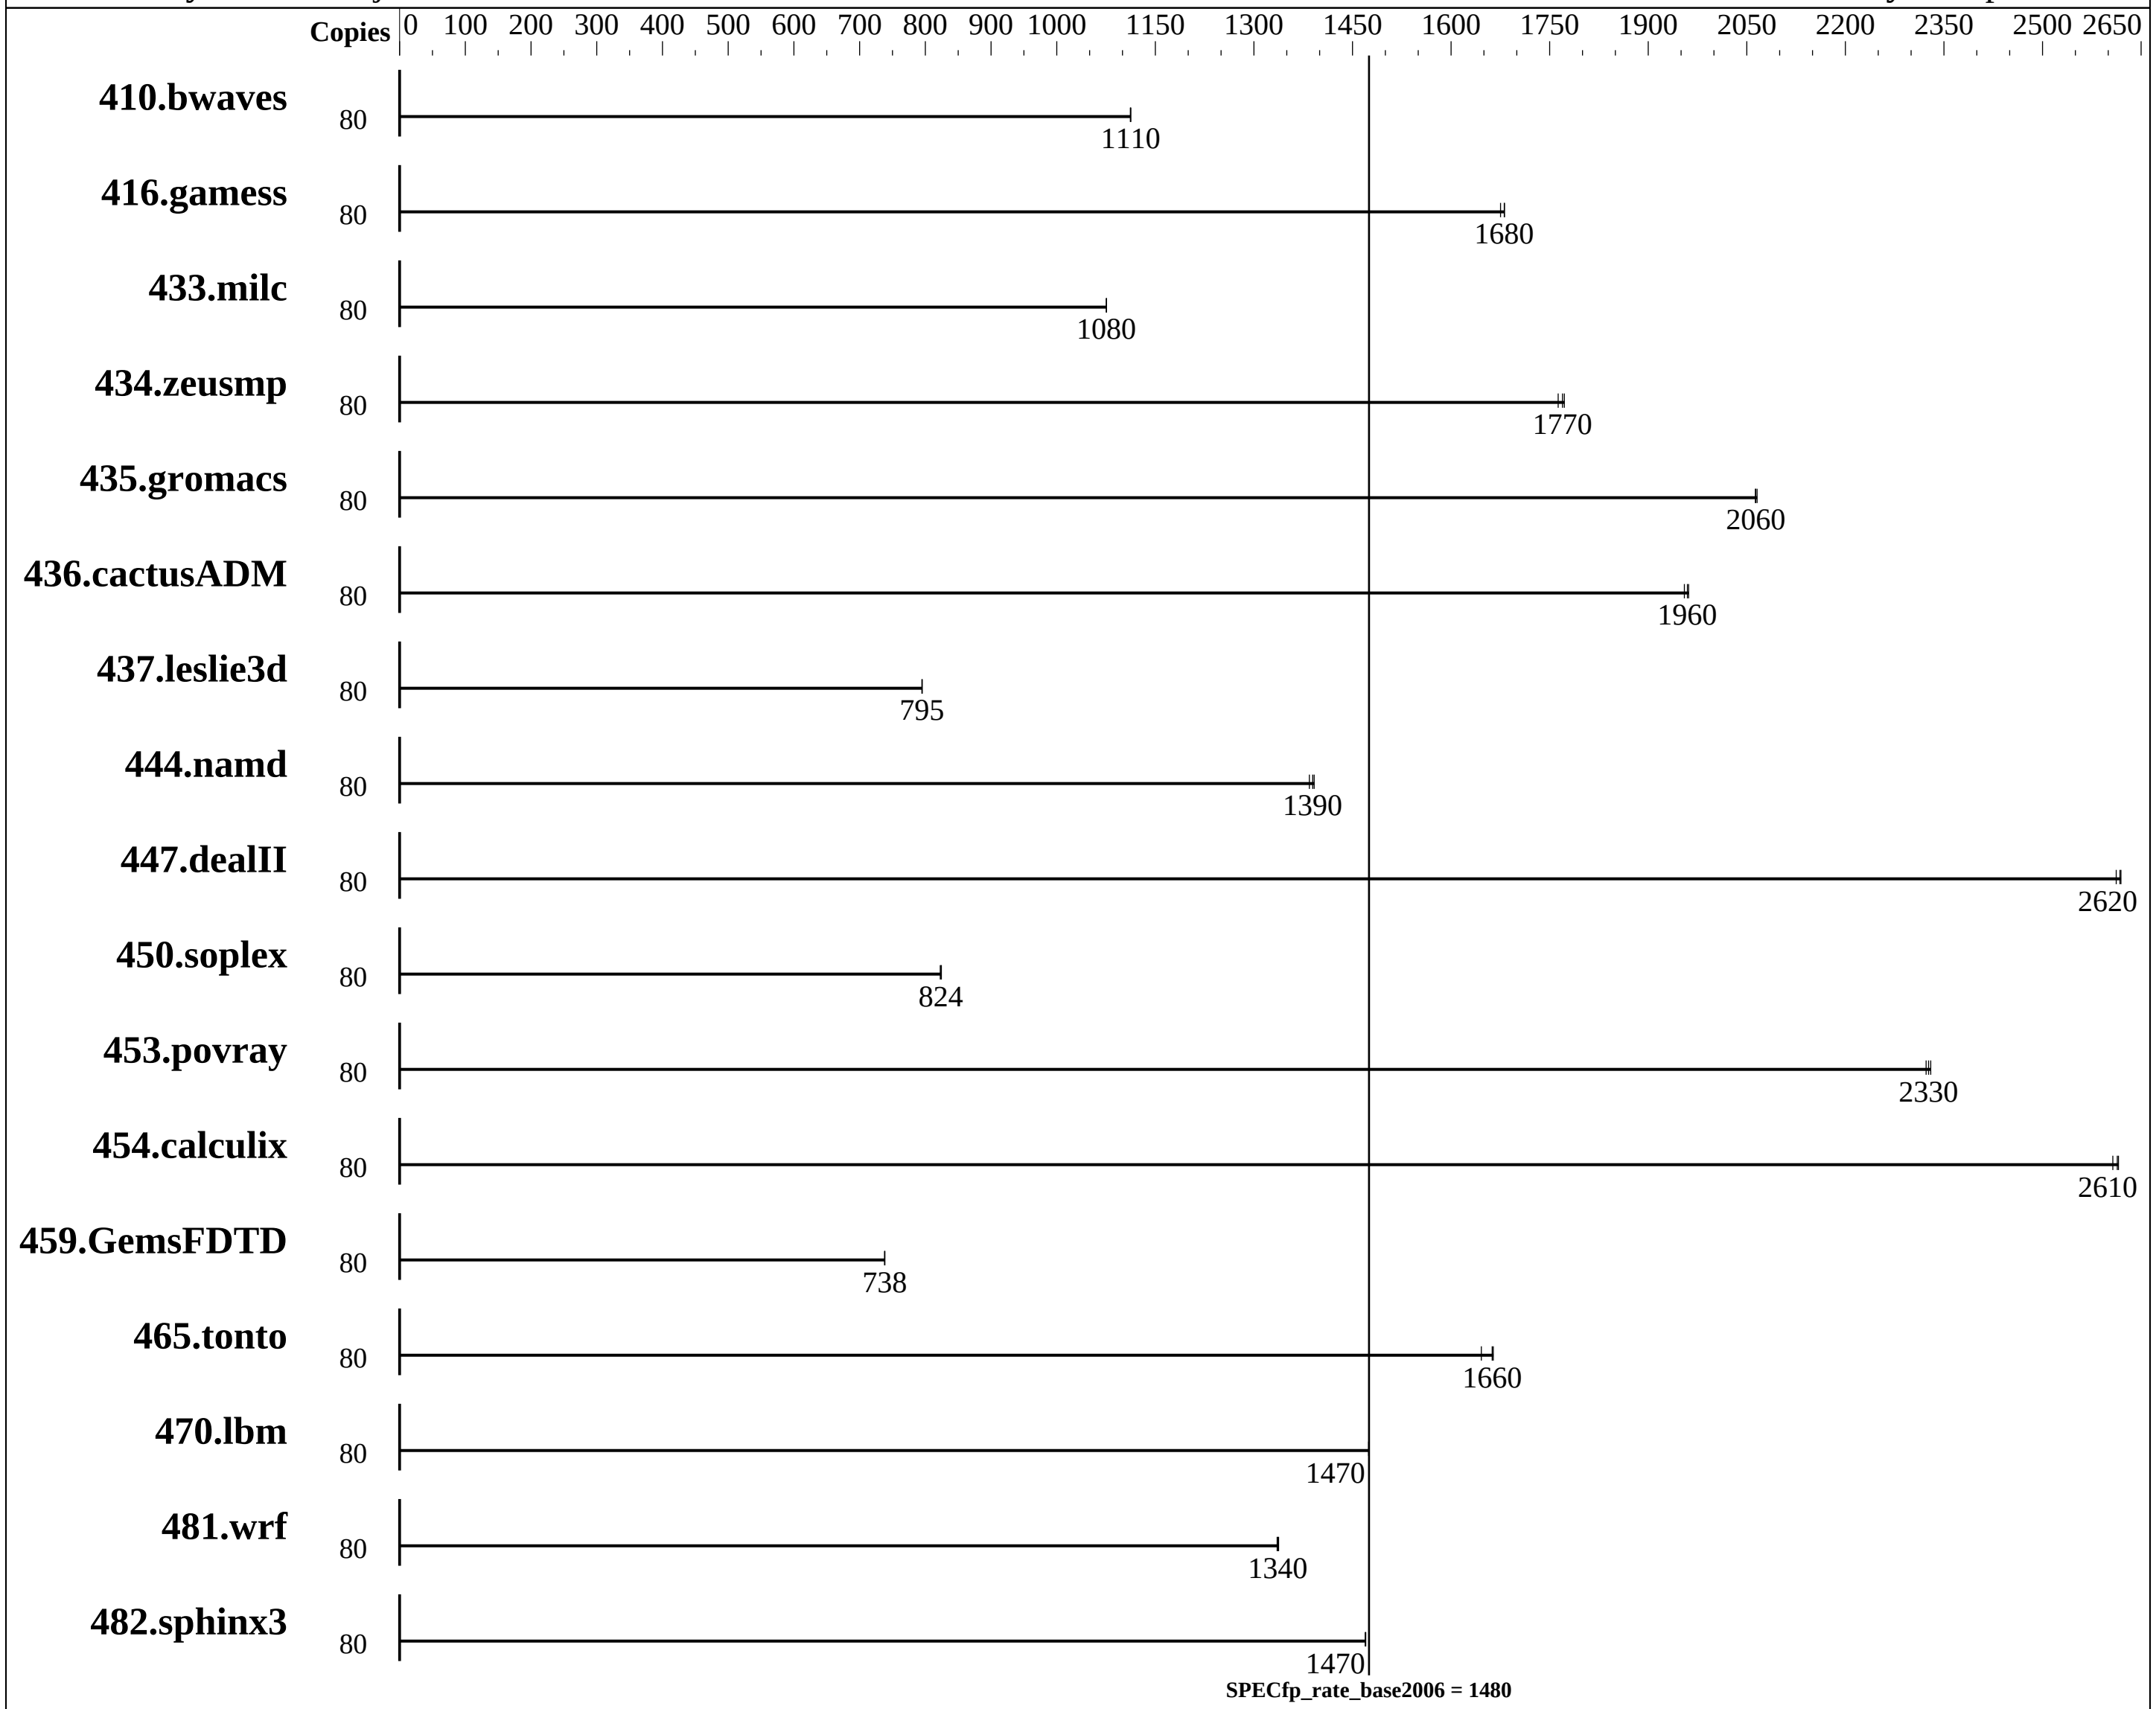

Hardware

CPU Name:	Intel Xeon Gold 6148
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	40 cores, 2 chips, 20 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	tmpfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Gold 6148, 2.40GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1480

CPU2006 license:	19	**Test date:**	Oct-2017
Test sponsor:	Fujitsu	**Hardware Availability:**	Jul-2017
Tested by:	Fujitsu	**Software Availability:**	Apr-2017

L3 Cache:	27.5 MB I+D on chip per chip	Base Pointers:	32/64-bit
Other Cache:	None	Peak Pointers:	Not Applicable
Memory:	384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)	Other Software:	None
Disk Subsystem:	188 GB tmpfs		
Other Hardware:	1 x SATA HDD, 1000 GB, 7200 RPM, used for swap		

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	977	1110	978	1110	**977**	**1110**							
416.gamess	80	935	1680	932	1680	**932**	**1680**							
433.milc	80	683	1080	**683**	**1080**	683	1080							
434.zeusmp	80	411	1770	**411**	**1770**	413	1760							
435.gromacs	80	**277**	**2060**	277	2060	277	2070							
436.cactusADM	80	489	1960	**488**	**1960**	487	1960							
437.leslie3d	80	**946**	**795**	946	795	946	795							
444.namd	80	**462**	**1390**	463	1380	461	1390							
447.dealII	80	349	2620	350	2610	**350**	**2620**							
450.soplex	80	**810**	**824**	811	823	809	824							
453.povray	80	**183**	**2330**	183	2320	183	2330							
454.calculix	80	252	2620	253	2610	**253**	**2610**							
459.GemsFDTD	80	1150	738	1150	738	**1150**	**738**							
465.tonto	80	**473**	**1660**	473	1660	478	1650							
470.lbm	80	745	1480	745	1470	**745**	**1470**							
481.wrf	80	**669**	**1340**	668	1340	669	1340							
482.sphinx3	80	1061	1470	**1061**	**1470**	1061	1470							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-79
Turbo mode set with :
cpupower -c all frequency-set -g performance
Tmpfs filesystem can be set with:
mkdir /home/memory
mount -t tmpfs -o size=188g,rw tmpfs /home/memory
Process tunning setting:
```

Continued on next page

Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Gold 6148, 2.40GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1480

CPU2006 license: 19		**Test date:**	Oct-2017
Test sponsor:	Fujitsu	**Hardware Availability:**	Jul-2017
Tested by:	Fujitsu	**Software Availability:**	Apr-2017

Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

Platform Notes

```
BIOS configuration:
HWPM Support = Disabled
Intel Virtualization Technology = Disabled
Link Frequency Select = 10.4 GT/s
Sub NUMA Clustering = Enabled
IMC Interleaving = 1-way
LLC Dead Line Alloc = Disabled
Stale AtoS = Enabled
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-knpm Thu Oct 12 18:12:59 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
      2 "physical id"s (chips)
      80 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 20
      siblings  : 40
      physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
      physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
   cache size : 28160 KB

From /proc/meminfo
   MemTotal:       394412572 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
```

Continued on next page

Platform Notes (Continued)

```
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
   Linux linux-knpm 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
   (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 12 12:14

SPEC is set to: /home/memory/speccpu
   Filesystem     Type   Size  Used Avail Use% Mounted on
   tmpfs          tmpfs  188G  4.1G  184G   3% /home/memory
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.7.0 for D3384-A1x
  07/25/2017
  Memory:
   24x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64:/home/memory/speccpu/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -qopt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -qopt-mem-layout-trans=3`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -qopt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevC.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevC.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Nov 1 00:54:38 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 October 2017.