SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10
(2.10 GHz, Intel Xeon Gold 6130)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 1230

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Apr-2016

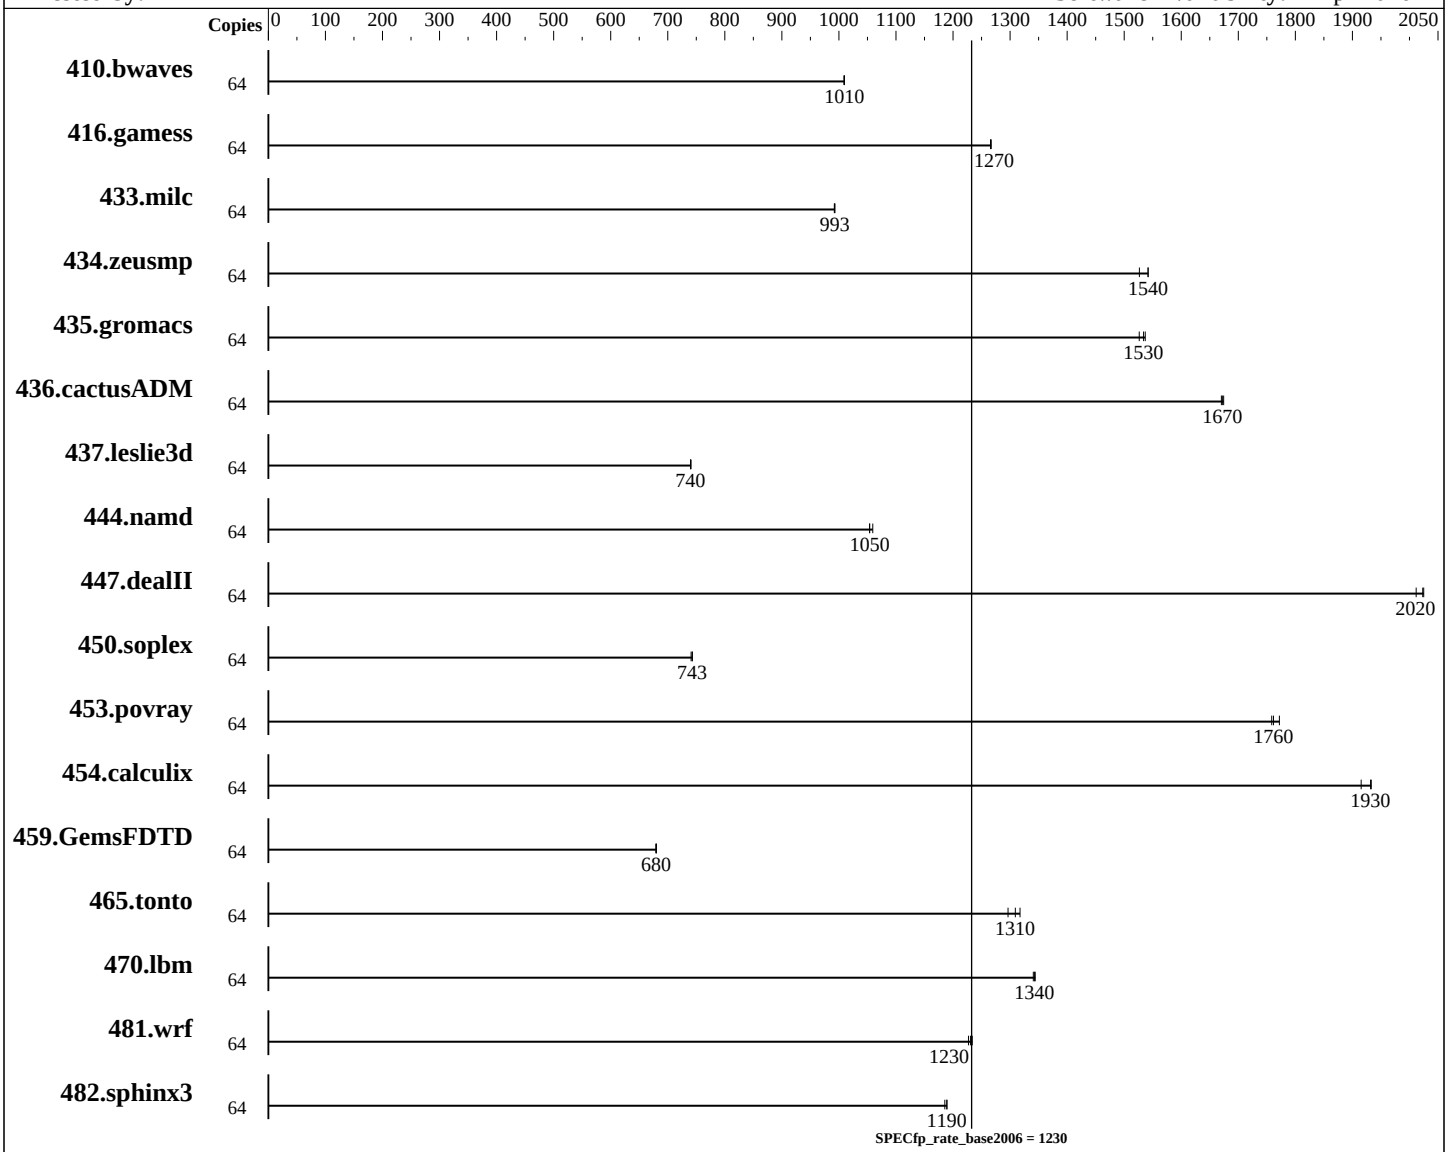

Hardware

CPU Name:	Intel Xeon Gold 6130
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	32 cores, 2 chips, 16 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chip(s)
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP2 Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10
(2.10 GHz, Intel Xeon Gold 6130)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1230

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Apr-2016

L3 Cache: 22 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 960 GB SSD SATA, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: Not Applicable
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	861	1010	**862**	**1010**	862	1010							
416.gamess	64	989	1270	990	1270	**990**	**1270**							
433.milc	64	592	992	592	993	**592**	**993**							
434.zeusmp	64	**378**	**1540**	381	1530	378	1540							
435.gromacs	64	297	1540	**298**	**1530**	299	1530							
436.cactusADM	64	458	1670	457	1670	**457**	**1670**							
437.leslie3d	64	812	741	813	740	**813**	**740**							
444.namd	64	485	1060	487	1050	**487**	**1050**							
447.dealII	64	364	2010	362	2020	**362**	**2020**							
450.soplex	64	**719**	**743**	720	741	718	743							
453.povray	64	192	1770	194	1760	**193**	**1760**							
454.calculix	64	**273**	**1930**	273	1930	276	1920							
459.GemsFDTD	64	1000	679	998	680	**999**	**680**							
465.tonto	64	478	1320	**481**	**1310**	486	1300							
470.lbm	64	656	1340	**655**	**1340**	654	1340							
481.wrf	64	579	1230	583	1230	**581**	**1230**							
482.sphinx3	64	1049	1190	**1049**	**1190**	1052	1190							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 Memory Patrol Scrubbing set to Disabled
 LLC Prefetcher set to Enabled
 LLC Dead Line Allocation set to Disabled
 Stale A to S set to Disabled
 Workload Pofile set to General Throughput Compute
  Minimum Processor Idle Power Core C-State set to C1E

Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-vjuj Thu Oct 12 12:41:50 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
      2 "physical id"s (chips)
      64 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 16
      siblings  : 32
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
   cache size : 22528 KB

From /proc/meminfo
   MemTotal:       395924520 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
```

Continued on next page

Platform Notes (Continued)

```
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

  uname -a:
     Linux linux-vjuj 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
     (9464f67) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Oct 12 12:05

  SPEC is set to: /home/cpu2006
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda4      xfs   852G  6.3G  846G   1% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS HPE I42 09/27/2017
    Memory:
     24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Nov 15 10:58:58 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 November 2017.