



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.00 GHz, Intel Xeon Gold 6154)

**SPECint®2006 =**

**Not Run**

**SPECint\_base2006 =**

**74.6**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

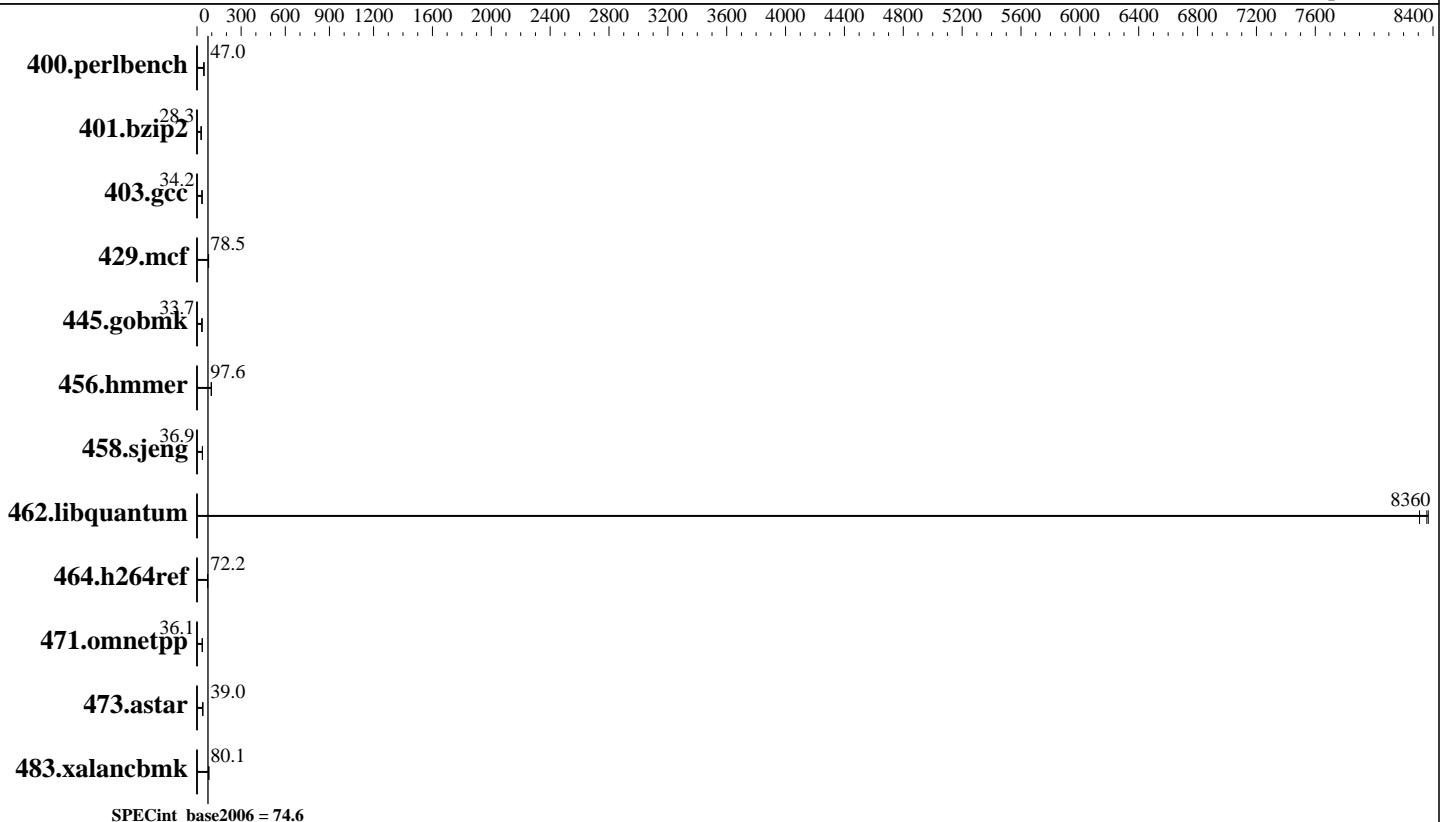

## Hardware

CPU Name: Intel Xeon Gold 6154  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip  
 CPU(s) orderable: 1, 2 chip(s)  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 24.75 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Disk Subsystem: 1 x 960 GB SSD SATA, RAID 0  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP2  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: Not Applicable  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.00 GHz, Intel Xeon Gold 6154)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**74.6**

**CPU2006 license:** 3

**Test date:** Oct-2017

**Test sponsor:** HPE

**Hardware Availability:** Oct-2017

**Tested by:** HPE

**Software Availability:** Apr-2017

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	208	47.1	208	46.9	<b>208</b>	<b>47.0</b>						
401.bzip2	341	28.3	340	28.4	<b>341</b>	<b>28.3</b>						
403.gcc	236	34.1	<b>236</b>	<b>34.2</b>	236	34.2						
429.mcf	116	78.7	118	77.3	<b>116</b>	<b>78.5</b>						
445.gobmk	311	33.7	<b>311</b>	<b>33.7</b>	311	33.7						
456.hmmer	<b>95.6</b>	<b>97.6</b>	95.3	97.9	96.2	97.0						
458.sjeng	328	36.9	<b>328</b>	<b>36.9</b>	328	36.9						
462.libquantum	2.49	8310	<b>2.48</b>	<b>8360</b>	2.48	8370						
464.h264ref	309	71.5	<b>307</b>	<b>72.2</b>	307	72.2						
471.omnetpp	<b>173</b>	<b>36.1</b>	175	35.7	171	36.6						
473.astar	179	39.2	<b>180</b>	<b>39.0</b>	180	39.0						
483.xalancbmk	85.7	80.5	88.2	78.3	<b>86.1</b>	<b>80.1</b>						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

## Platform Notes

BIOS Configuration:

Intel Hyperthreading set to Disabled

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetcher set to Enabled

LLC Dead Line Allocation set to Disabled

Stale A to S set to Disabled

Workload Pofile set to General Peak Frequency Compute

Energy/Performance Bias set to Maximum Performance

Uncore Frequency Scaling set to Auto

Workload Pofile set to Custom

NUMA Group Size Optimization set to Flat

Sysinfo program /home/cpu2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-vjvuj Thu Oct 26 09:12:52 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.00 GHz, Intel Xeon Gold 6154)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**74.6**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Oct-2017

**Hardware Availability:**

Oct-2017

**Software Availability:**

Apr-2017

## Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6154 CPU @ 3.00GHz
        2 "physical id"s (chips)
        36 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 18
    siblings   : 18
    physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    cache size : 25344 KB
```

```
From /proc/meminfo
MemTotal:      395928244 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-vjuj 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 26 09:09
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda4        xfs   852G   44G   809G   6%  /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.00 GHz, Intel Xeon Gold 6154)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**74.6**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I42 09/27/2017

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

OMP\_NUM\_THREADS = "36"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -DSPEC\_CPU\_LP64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(3.00 GHz, Intel Xeon Gold 6154)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**74.6**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
-auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 15 10:59:12 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 November 2017.