SPEC® CFP2006 Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.30 GHz, Intel Xeon Platinum 8165)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 1630

CPU2006 license:	3	**Test date:**	Nov-2017
Test sponsor:	HPE	**Hardware Availability:**	Dec-2017
Tested by:	HPE	**Software Availability:**	Apr-2017

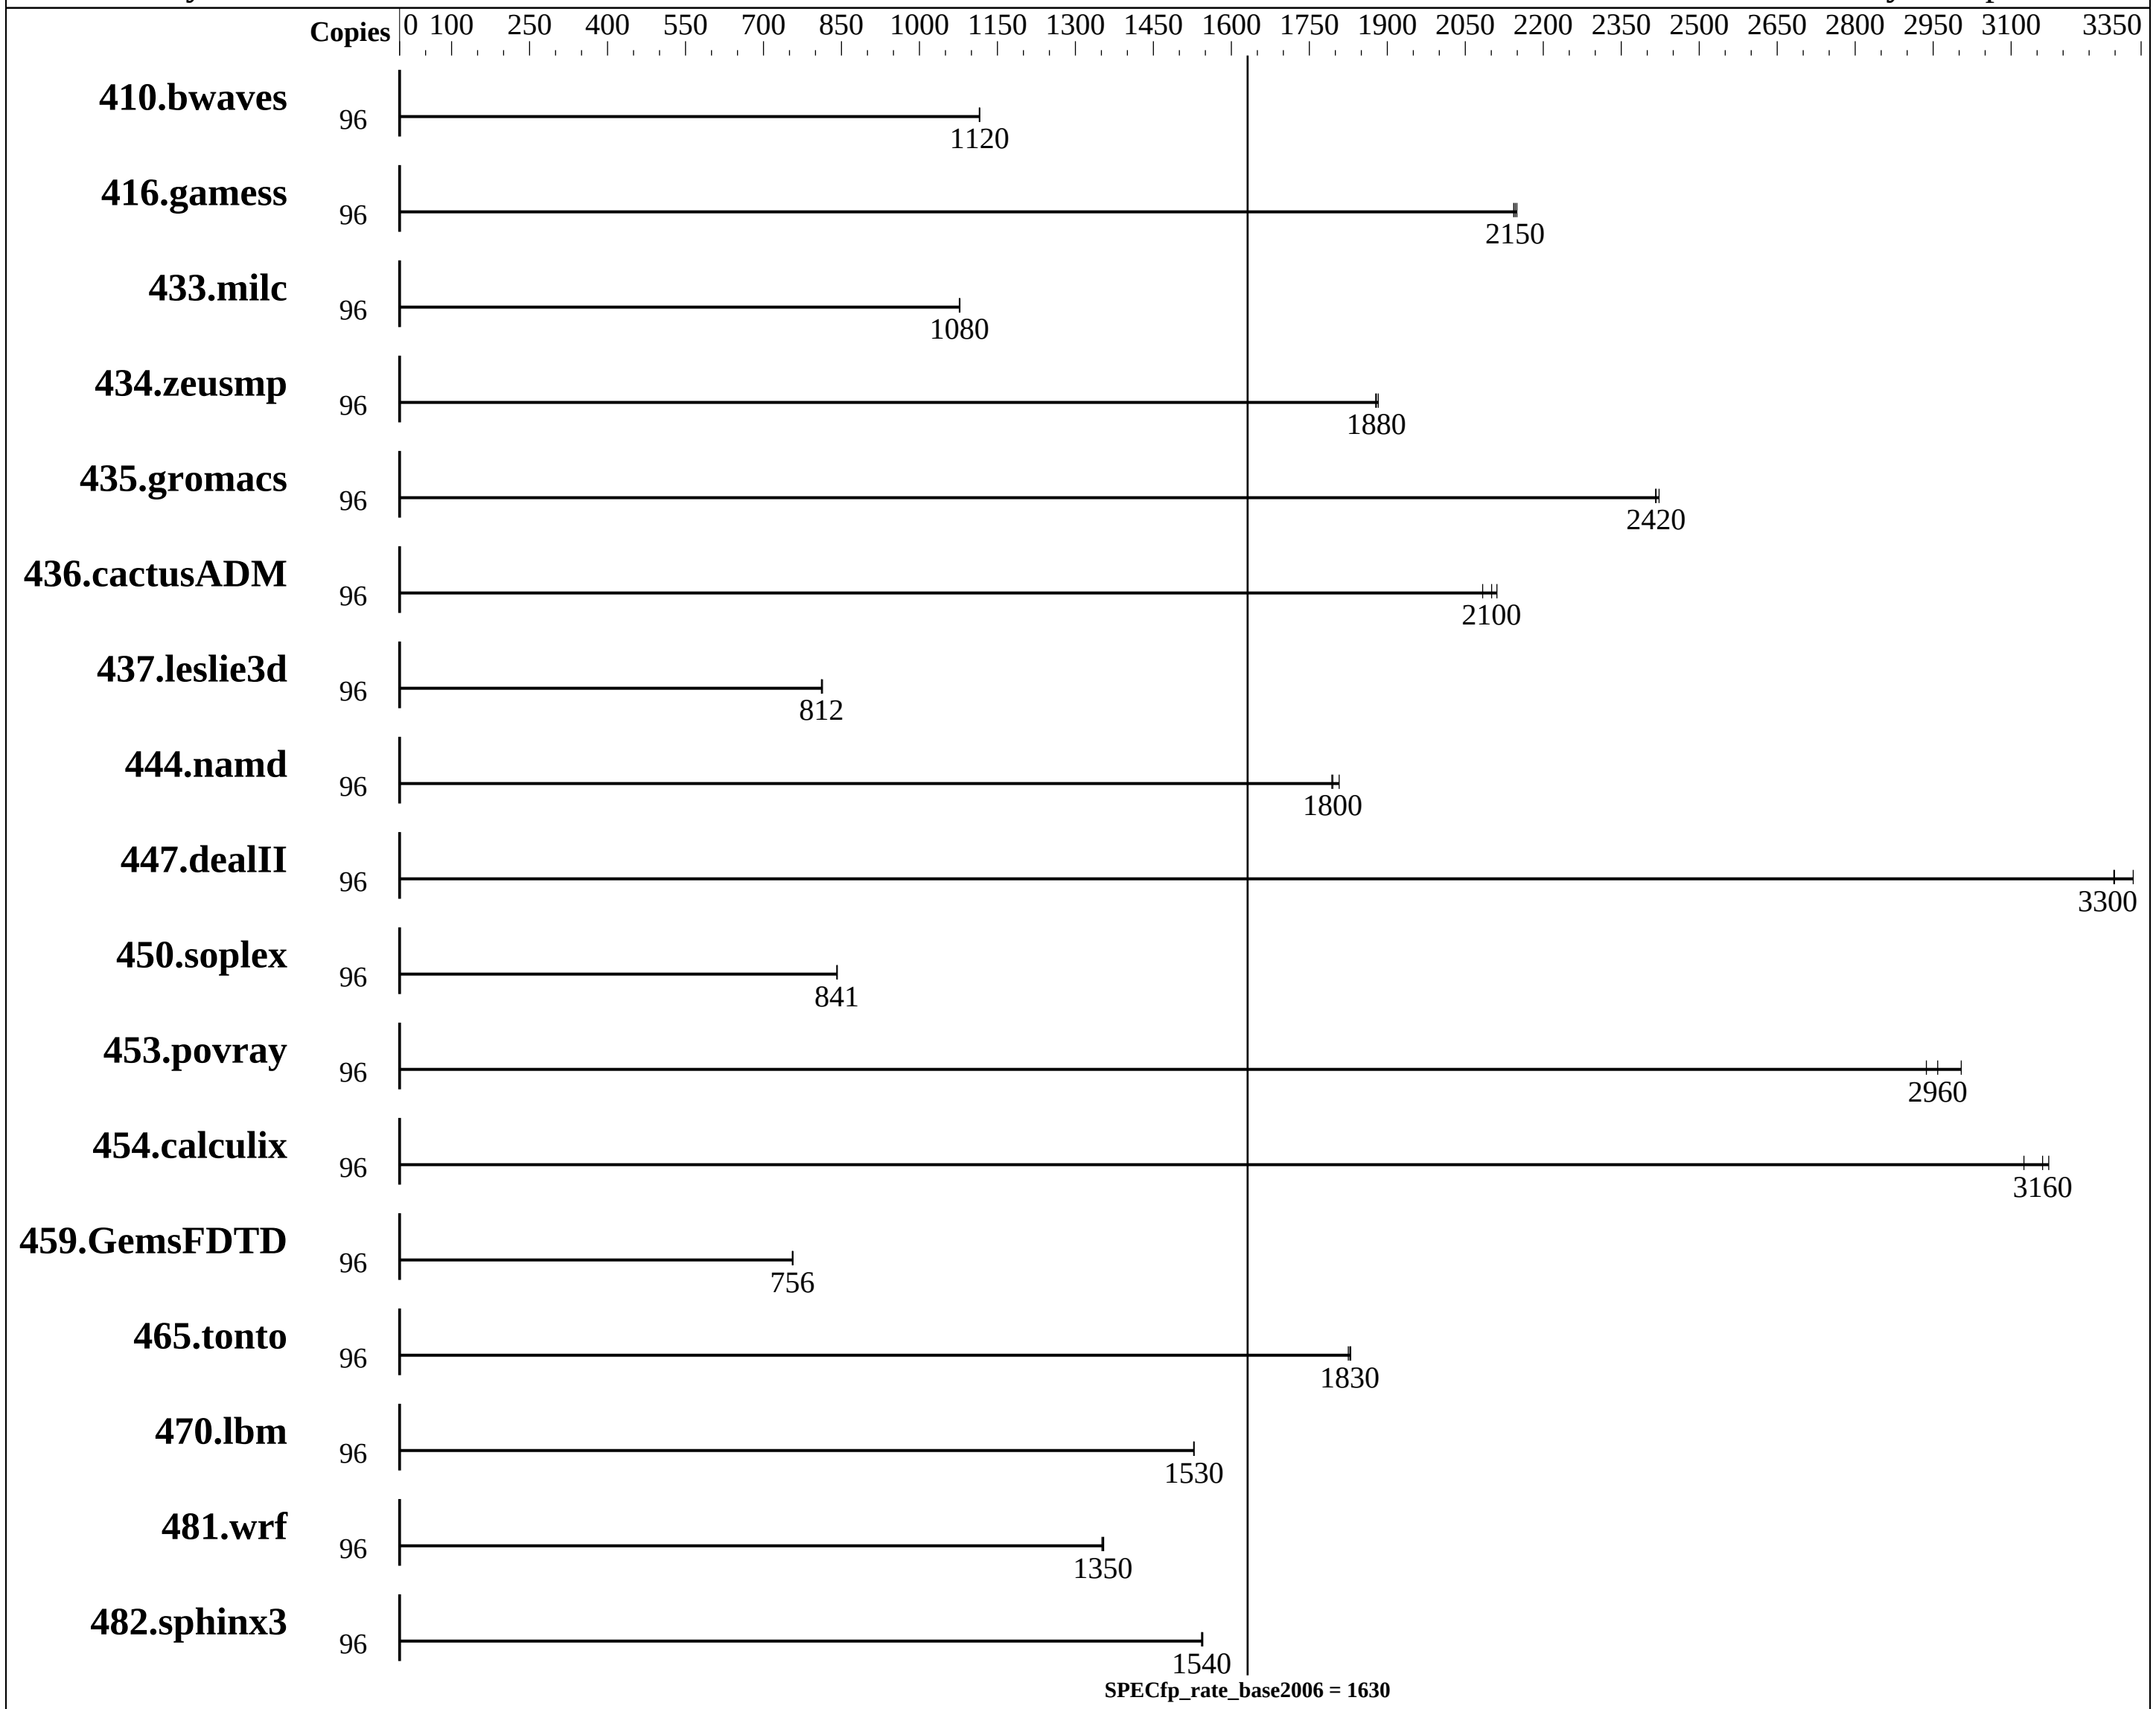

Hardware

CPU Name:	Intel Xeon Platinum 8165
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	48 cores, 2 chips, 24 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chip(s)
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP2 Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

L3 Cache: 33 MB I+D on chip per chip
Other Cache: None
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 960 GB SATA SSD, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: Not Applicable
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	96	1170	1120	1169	1120	**1169**	**1120**							
416.gamess	96	875	2150	**876**	**2150**	877	2140							
433.milc	96	819	1080	**818**	**1080**	818	1080							
434.zeusmp	96	**465**	**1880**	465	1880	464	1880							
435.gromacs	96	284	2420	283	2420	**284**	**2420**							
436.cactusADM	96	551	2080	**546**	**2100**	543	2110							
437.leslie3d	96	1109	813	**1112**	**812**	1112	812							
444.namd	96	426	1810	**429**	**1800**	429	1790							
447.dealII	96	**333**	**3300**	333	3300	329	3330							
450.soplex	96	**952**	**841**	952	841	951	842							
453.povray	96	174	2940	170	3000	**173**	**2960**							
454.calculix	96	**251**	**3160**	253	3120	250	3170							
459.GemsFDTD	96	1346	757	**1348**	**756**	1348	756							
465.tonto	96	518	1820	**517**	**1830**	516	1830							
470.lbm	96	**863**	**1530**	864	1530	863	1530							
481.wrf	96	**793**	**1350**	792	1350	794	1350							
482.sphinx3	96	1211	1550	**1213**	**1540**	1213	1540							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set wtih "tuned-adm profile throughput-performance"
```

Continued on next page

Operating System Notes (Continued)

```
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Throughput Compute
  Minimum Processor Idle Power Core C-State set to C1E
 Sysinfo program /home/cpu2006/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on dl380gen10 Fri Nov 17 10:02:59 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8165 CPU @ 2.30GHz
       2 "physical id"s (chips)
       96 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 24
       siblings  : 48
       physical 0: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28
       29
       physical 1: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28
       29
    cache size : 33792 KB

 From /proc/meminfo
    MemTotal:       197545204 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP2

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or
       release.
       # Please check /etc/os-release for details about this release.
```

Continued on next page

Platform Notes (Continued)

```
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux dl380gen10 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
    (9464f67) x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Nov 17 09:59

 SPEC is set to: /home/cpu2006
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sdb4      xfs   852G  147G  705G  18% /home
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS HPE U30 09/29/2017
   Memory:
    24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Continued on next page

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL380 Gen10
(2.30 GHz, Intel Xeon Platinum 8165)

SPECfp_rate2006 = Not Run
SPECfp_rate_base2006 = 1630

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE
Test date: Nov-2017
Hardware Availability: Dec-2017
Software Availability: Apr-2017

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 12 17:06:51 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 December 2017.