SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Gold 6138T)

SPECfp®_rate2006 = 2820

SPECfp_rate_base2006 = 2760

CPU2006 license: 9017
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Nov-2017
Hardware Availability: Sep-2017
Software Availability: Apr-2017

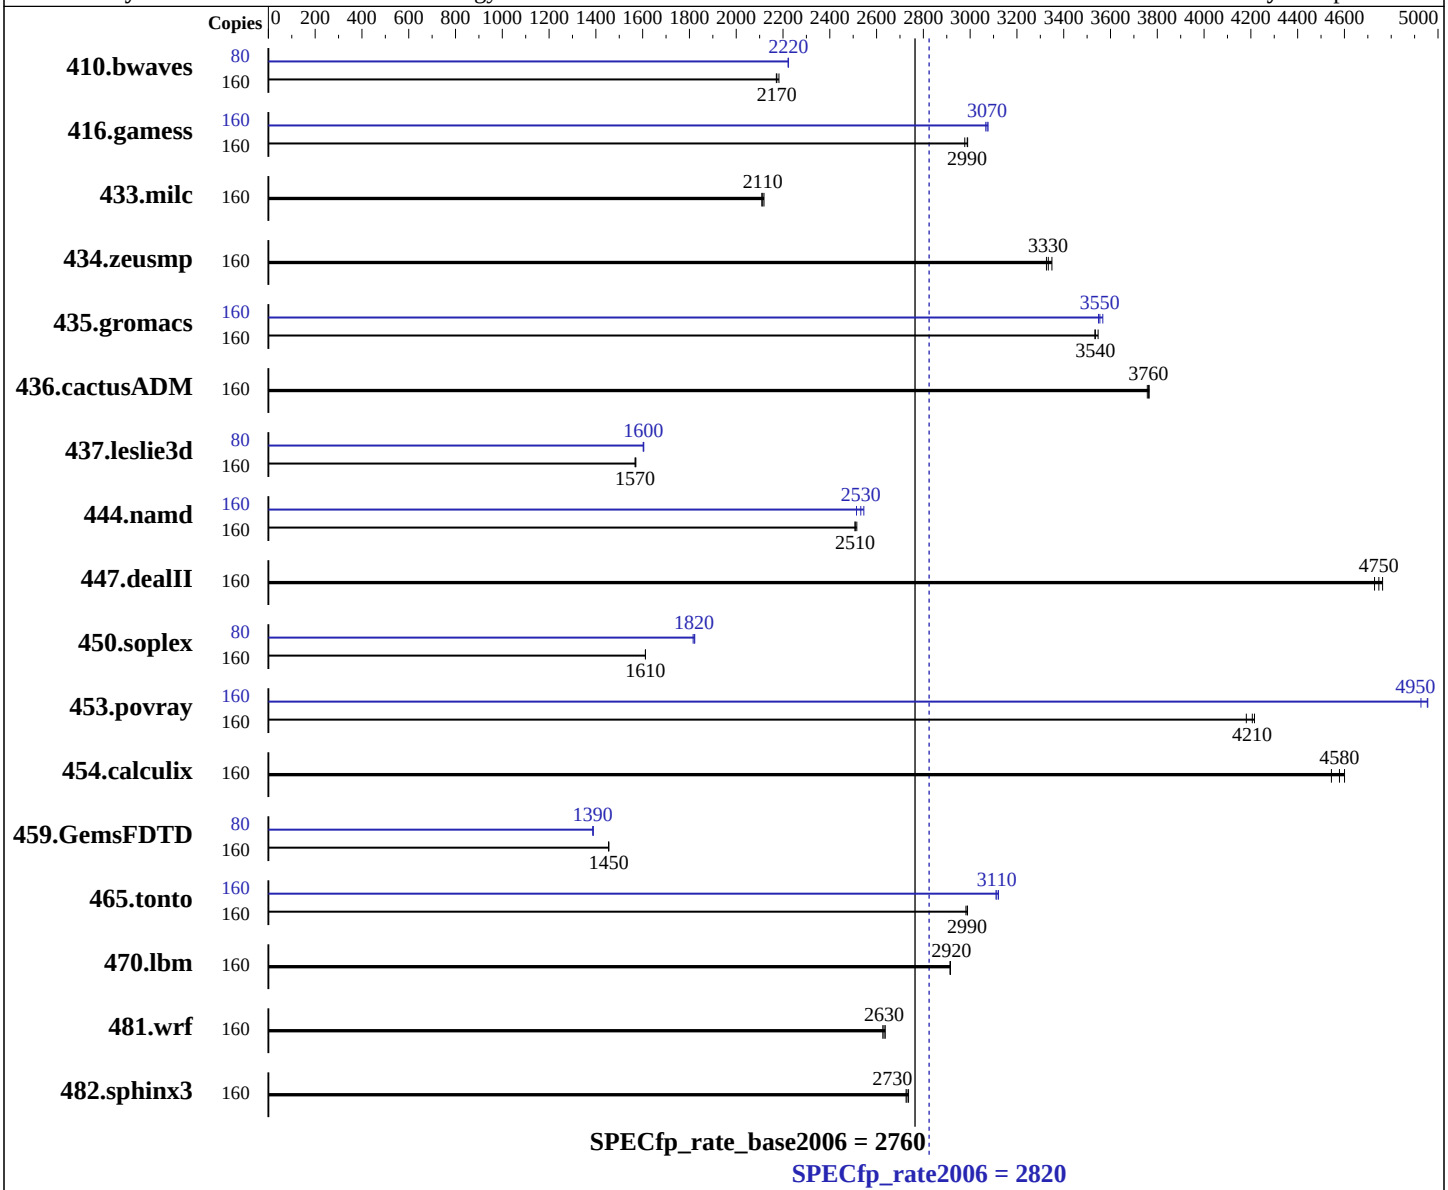

Hardware

CPU Name:	Intel Xeon Gold 6138T
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	80 cores, 4 chips, 20 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 (x86_64) Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	tmpfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.00 GHz, Intel Xeon Gold 6138T)

SPECfp_rate2006 = 2820

SPECfp_rate_base2006 = 2760

CPU2006 license: 9017
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Nov-2017
Hardware Availability: Sep-2017
Software Availability: Apr-2017

L3 Cache: 27.5 MB I+D on chip per chip
Other Cache: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Disk Subsystem: 800 GB tmpfs
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	160	996	2180	**1000**	**2170**	1001	2170	80	489	2220	489	2220	**489**	**2220**
416.gamess	160	1048	2990	**1049**	**2990**	1052	2980	160	**1020**	**3070**	1022	3070	1018	3080
433.milc	160	**695**	**2110**	693	2120	696	2110	160	**695**	**2110**	693	2120	696	2110
434.zeusmp	160	**437**	**3330**	435	3350	438	3330	160	**437**	**3330**	435	3350	438	3330
435.gromacs	160	323	3530	322	3550	**323**	**3540**	160	**321**	**3550**	320	3570	322	3550
436.cactusADM	160	509	3760	**508**	**3760**	508	3770	160	509	3760	**508**	**3760**	508	3770
437.leslie3d	160	**959**	**1570**	957	1570	959	1570	80	469	1600	469	1600	**469**	**1600**
444.namd	160	**511**	**2510**	510	2520	512	2510	160	510	2510	504	2550	**507**	**2530**
447.dealII	160	387	4730	384	4760	**386**	**4750**	160	387	4730	384	4760	**386**	**4750**
450.soplex	160	828	1610	828	1610	**828**	**1610**	80	**366**	**1820**	367	1820	366	1820
453.povray	160	204	4180	**202**	**4210**	202	4220	160	172	4960	**172**	**4950**	173	4930
454.calculix	160	287	4600	290	4540	**288**	**4580**	160	287	4600	290	4540	**288**	**4580**
459.GemsFDTD	160	**1167**	**1450**	1167	1450	1167	1460	80	612	1390	**612**	**1390**	611	1390
465.tonto	160	527	2990	**527**	**2990**	528	2980	160	504	3120	**506**	**3110**	506	3110
470.lbm	160	754	2920	754	2910	**754**	**2920**	160	754	2920	754	2910	**754**	**2920**
481.wrf	160	678	2640	**679**	**2630**	680	2630	160	678	2640	**679**	**2630**	680	2630
482.sphinx3	160	1144	2730	**1142**	**2730**	1139	2740	160	1144	2730	**1142**	**2730**	1139	2740

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
 mount -t tmpfs -o size=800g tmpfs /home
Process tuning setting:
 echo 50000     > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
 echo 240000000 > /proc/sys/kernel/sched_latency_ns
 echo 5000000   > /proc/sys/kernel/sched_migration_cost_ns
 echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
```

Continued on next page

Operating System Notes (Continued)

```
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
SNC set to Enable
DCU Streamer Prefetcher set to Disable
Stale AtoS set to Enable
LLC dead line alloc set to Disable
 Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-ciok Fri Nov 10 10:09:03 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6138T CPU @ 2.00GHz
       4 "physical id"s (chips)
       160 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 20
       siblings  : 40
       physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
       physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
       physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
       physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
    cache size : 28160 KB

 From /proc/meminfo
    MemTotal:       1584766272 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or
       release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
```

Continued on next page

Platform Notes (Continued)

```
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

  uname -a:
     Linux linux-ciok 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
     (9464f67) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Nov 9 22:33

  SPEC is set to: /home/cpu2006-1.2-ic17.0u3
     Filesystem     Type   Size  Used Avail Use% Mounted on
     tmpfs          tmpfs  800G  5.0G  796G   1% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS Lenovo -[PSE105X-1.00]- 08/17/2017
    Memory:
     48x NO DIMM NO DIMM
     48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -fno-alias -auto-ilp32 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-malloc-options=3 -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -auto -inline-calloc -qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32 -qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-E.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-E.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Dec 15 12:20:35 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 December 2017.