SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176)

SPECfp®_rate2006 = 3440

SPECfp_rate_base2006 = 3350

CPU2006 license: 9017
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Nov-2017
Hardware Availability: Sep-2017
Software Availability: Apr-2017

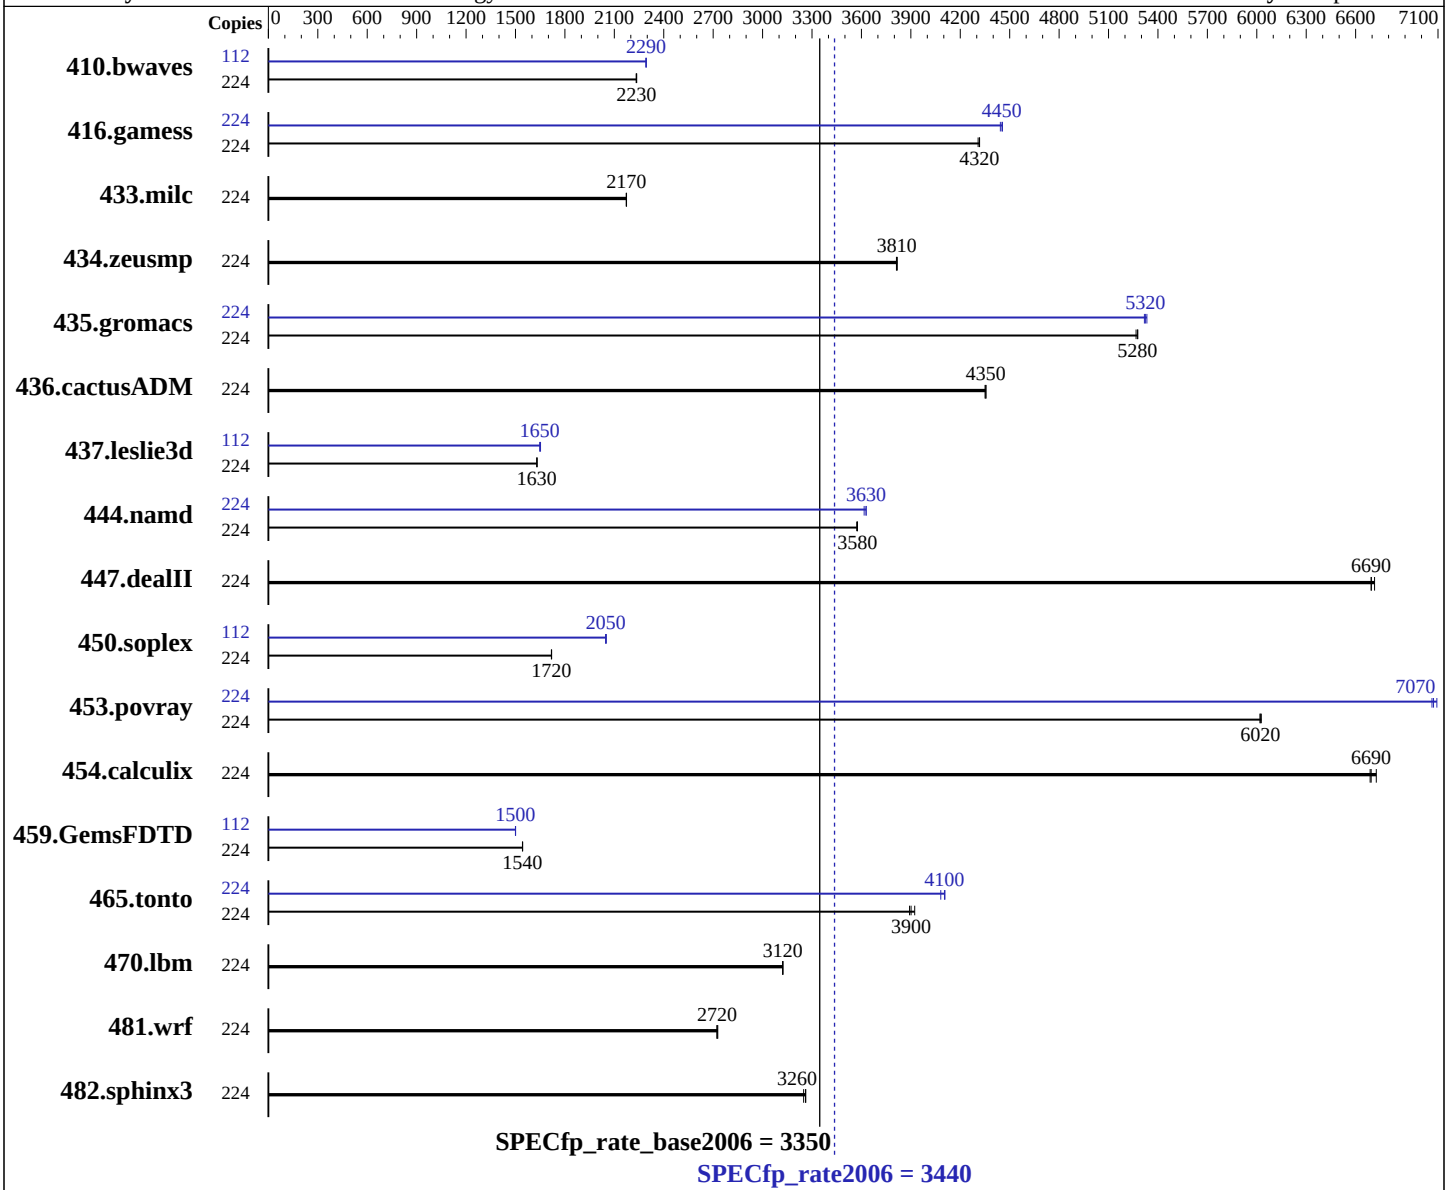

Hardware

CPU Name:	Intel Xeon Platinum 8176
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	112 cores, 4 chips, 28 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 (x86_64) Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	tmpfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176)

SPECfp_rate2006 = 3440

SPECfp_rate_base2006 = 3350

CPU2006 license: 9017
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Nov-2017
Hardware Availability: Sep-2017
Software Availability: Apr-2017

L3 Cache: 38.5 MB I+D on chip per chip
Other Cache: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Disk Subsystem: 800 GB tmpfs
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	224	**1362**	**2230**	1361	2240	1363	2230	112	664	2290	663	2290	**664**	**2290**
416.gamess	224	**1016**	**4320**	1018	4310	1016	4320	224	987	4440	**985**	**4450**	984	4460
433.milc	224	946	2170	947	2170	**946**	**2170**	224	946	2170	947	2170	**946**	**2170**
434.zeusmp	224	535	3810	**534**	**3810**	534	3820	224	535	3810	**534**	**3810**	534	3820
435.gromacs	224	**303**	**5280**	303	5280	304	5270	224	**300**	**5320**	300	5330	301	5320
436.cactusADM	224	615	4350	**615**	**4350**	614	4360	224	615	4350	**615**	**4350**	614	4360
437.leslie3d	224	**1292**	**1630**	1292	1630	1291	1630	112	639	1650	637	1650	**639**	**1650**
444.namd	224	**502**	**3580**	503	3570	502	3580	224	495	3630	**495**	**3630**	497	3620
447.dealII	224	**383**	**6690**	383	6690	382	6710	224	**383**	**6690**	383	6690	382	6710
450.soplex	224	1087	1720	**1087**	**1720**	1087	1720	112	**456**	**2050**	455	2050	456	2050
453.povray	224	198	6020	198	6030	**198**	**6020**	224	169	7060	168	7090	**168**	**7070**
454.calculix	224	275	6730	276	6690	**276**	**6690**	224	275	6730	276	6690	**276**	**6690**
459.GemsFDTD	224	**1540**	**1540**	1540	1540	1541	1540	112	**792**	**1500**	792	1500	792	1500
465.tonto	224	566	3890	562	3920	**565**	**3900**	224	**537**	**4100**	540	4080	537	4110
470.lbm	224	985	3120	**986**	**3120**	986	3120	224	985	3120	**986**	**3120**	986	3120
481.wrf	224	**918**	**2720**	917	2730	919	2720	224	**918**	**2720**	917	2730	919	2720
482.sphinx3	224	**1339**	**3260**	1338	3260	1344	3250	224	**1339**	**3260**	1338	3260	1344	3250

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
 mount -t tmpfs -o size=800g tmpfs /home
Process tuning setting:
 echo 50000     > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
 echo 240000000 > /proc/sys/kernel/sched_latency_ns
 echo 5000000   > /proc/sys/kernel/sched_migration_cost_ns
 echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
```

Continued on next page

Operating System Notes (Continued)

```
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
SNC set to Enable
DCU Streamer Prefetcher set to Disable
Stale AtoS set to Enable
LLC dead line alloc set to Disable
 Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on Proton4S-SUSE12SP2 Sat Nov 11 18:54:57 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
       4 "physical id"s (chips)
       224 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 28
       siblings  : 56
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
       25 26 27 28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
       25 26 27 28 29 30
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
       25 26 27 28 29 30
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
       25 26 27 28 29 30
    cache size : 39424 KB

 From /proc/meminfo
    MemTotal:       1584765780 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or
       release.
       # Please check /etc/os-release for details about this release.
    os-release:
```

Continued on next page

Platform Notes (Continued)

```
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

  uname -a:
     Linux Proton4S-SUSE12SP2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC
     2016 (9464f67) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Nov 11 07:23

  SPEC is set to: /home/cpu2006-1.2-ic17.0u3
     Filesystem     Type   Size  Used Avail Use% Mounted on
     tmpfs          tmpfs  800G  5.0G  796G   1% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS Lenovo -[PSE105X-1.00]- 08/17/2017
    Memory:
     48x NO DIMM NO DIMM
     48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"

  Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
  memory using Redhat Enterprise Linux 7.2
  Transparent Huge Pages enabled by default
  Filesystem page cache cleared with:
  shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
     icc -m64
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-malloc-options=3
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-E.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-E.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Dec 15 12:20:36 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 December 2017.