SPEC® CFP2006 Result

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8170, 2.10GHz

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 6510

CPU2006 license:	19	**Test date:**	Nov-2017
Test sponsor:	Fujitsu	**Hardware Availability:**	Jul-2017
Tested by:	Fujitsu	**Software Availability:**	Sep-2017

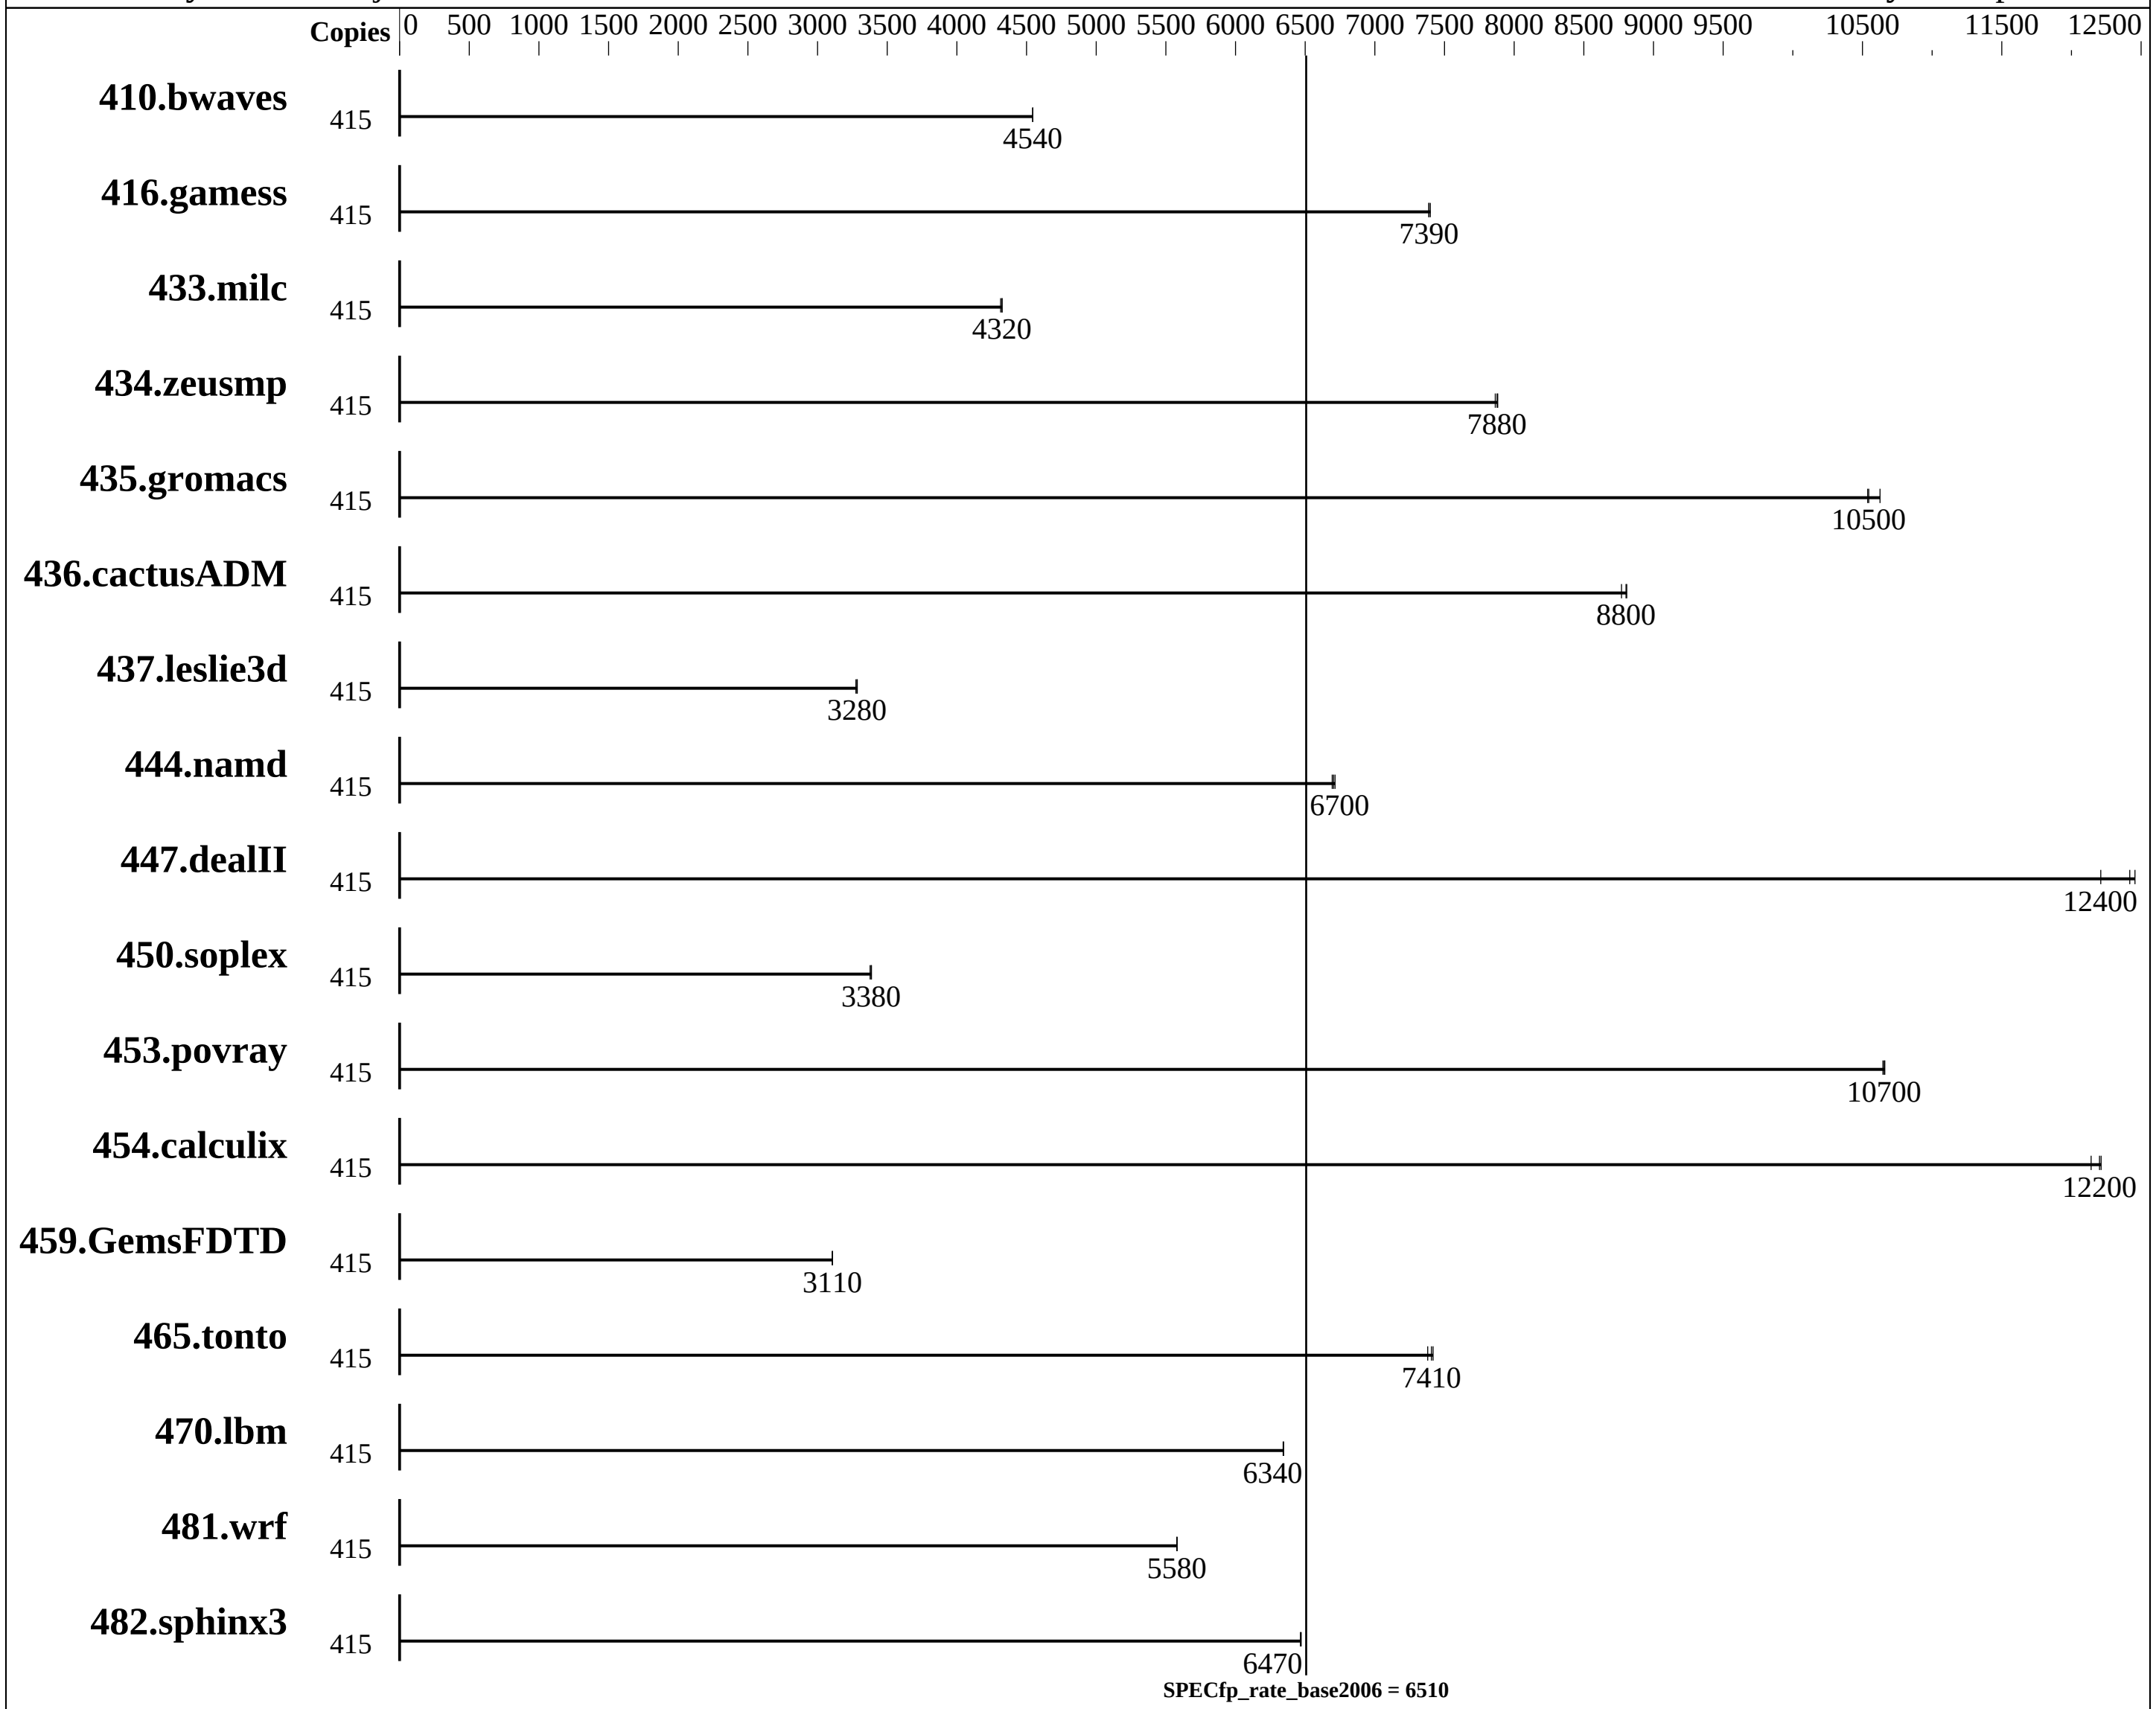

Hardware

CPU Name:	Intel Xeon Platinum 8170
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	208 cores, 8 chips, 26 cores/chip, 2 threads/core
CPU(s) orderable:	2,4,6,8 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	tmpfs
System State:	Run level 3 (multi-user)

Continued on next page

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8170, 2.10GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 6510

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Nov-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

L3 Cache: 35.75 MB I+D on chip per chip
Other Cache: None
Memory: 1536 GB (96 x 16 GB 2Rx4 PC4-2666V-R)
Disk Subsystem: 768 GB tmpfs
Other Hardware: 1 x SAS HDD, 600 GB, 10.5K RPM, used for swap

Base Pointers: 32/64-bit
Peak Pointers: Not Applicable
Other Software: None

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	415	**1241**	**4540**	1241	4540	1241	4540							
416.gamess	415	1098	7400	1100	7390	**1100**	**7390**							
433.milc	415	883	4310	881	4320	**881**	**4320**							
434.zeusmp	415	480	7860	479	7880	**479**	**7880**							
435.gromacs	415	279	10600	281	10500	**281**	**10500**							
436.cactusADM	415	565	8770	**563**	**8800**	563	8810							
437.leslie3d	415	1191	3280	1187	3290	**1188**	**3280**							
444.namd	415	**497**	**6700**	497	6690	496	6710							
447.dealII	415	381	12500	**382**	**12400**	389	12200							
450.soplex	415	1025	3380	**1023**	**3380**	1022	3390							
453.povray	415	207	10700	207	10600	**207**	**10700**							
454.calculix	415	282	12100	280	12200	**281**	**12200**							
459.GemsFDTD	415	**1417**	**3110**	1417	3110	1418	3110							
465.tonto	415	551	7420	**551**	**7410**	553	7380							
470.lbm	415	899	6340	899	6340	**899**	**6340**							
481.wrf	415	831	5580	**831**	**5580**	831	5580							
482.sphinx3	415	1251	6470	**1251**	**6470**	1250	6470							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter : nohz_full=1-415 isolcpus=1-415
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Set tmpfs filesystem with:
mkdir /home/memory
mount -t tmpfs -o size=768g,rw tmpfs /home/memory
Process tuning settings:
```

Continued on next page

Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
echo always > /sys/kernel/mm/transparent_hugepage/enabled
cpu idle state set with:
cpupower idle-set -d 2
cpupower idle-set -d 3
set affinity of rcu threads to the cpu0:
for i in ‘pgrep rcu‘ ; do taskset -pc 0 $i ; done
```

Platform Notes

```
BIOS configuration:
Intel Virtualization Technology = Disabled
HWPM Support = Disabled
DCU Streamer Prefetcher = Disabled
Stale AtoS = Enabled
LLC dead line alloc = Disabled
Sub NUMA Clustering = Enabled
Fan Control = Full
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-k55j Tue Nov 14 03:57:35 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
      8 "physical id"s (chips)
      416 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 26
      siblings  : 52
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
      26 27 28 29
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
      26 27 28 29
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
      26 27 28 29
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
      26 27 28 29
      physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
      26 27 28 29
      physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
      26 27 28 29
      physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
      26 27 28 29
```

Continued on next page

Platform Notes (Continued)

```
         physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
         26 27 28 29
      cache size : 36608 KB

   From /proc/meminfo
      MemTotal:       1583801256 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   From /etc/*release* /etc/*version*
      SuSE-release:
         SUSE Linux Enterprise Server 12 (x86_64)
         VERSION = 12
         PATCHLEVEL = 2
         # This file is deprecated and will be removed in a future service pack or
         release.
         # Please check /etc/os-release for details about this release.
      os-release:
         NAME="SLES"
         VERSION="12-SP2"
         VERSION_ID="12.2"
         PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
         ID="sles"
         ANSI_COLOR="0;32"
         CPE_NAME="cpe:/o:suse:sles:12:sp2"

   uname -a:
      Linux linux-k55j 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
      (9464f67) x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Nov 14 03:49

   SPEC is set to: /home/memory/speccpu
      Filesystem     Type   Size  Used Avail Use% Mounted on
      tmpfs          tmpfs  768G  9.7G  759G   2% /home/memory
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS FUJITSU V1.0.0.0 R1.21.0 for D3858-A1x            09/15/2017
     Memory:
      46x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666 MHz
      50x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/memory/speccpu/icc2018lib/ia32:/home/memory/speccpu/icc2018lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/memory/speccpu/sh10.2"
 Binaries compiled on a system with 2x Intel Xeon Platinum 8180 CPU + 384GB RAM
 memory using SUSE Linux Enterprise Server 12 SP2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevC.html
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevC.xml
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml