SPEC® CFP2006 Result

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8176, 2.10GHz

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 6720

CPU2006 license:	19	**Test date:**	Nov-2017
Test sponsor:	Fujitsu	**Hardware Availability:**	Jul-2017
Tested by:	Fujitsu	**Software Availability:**	Sep-2017

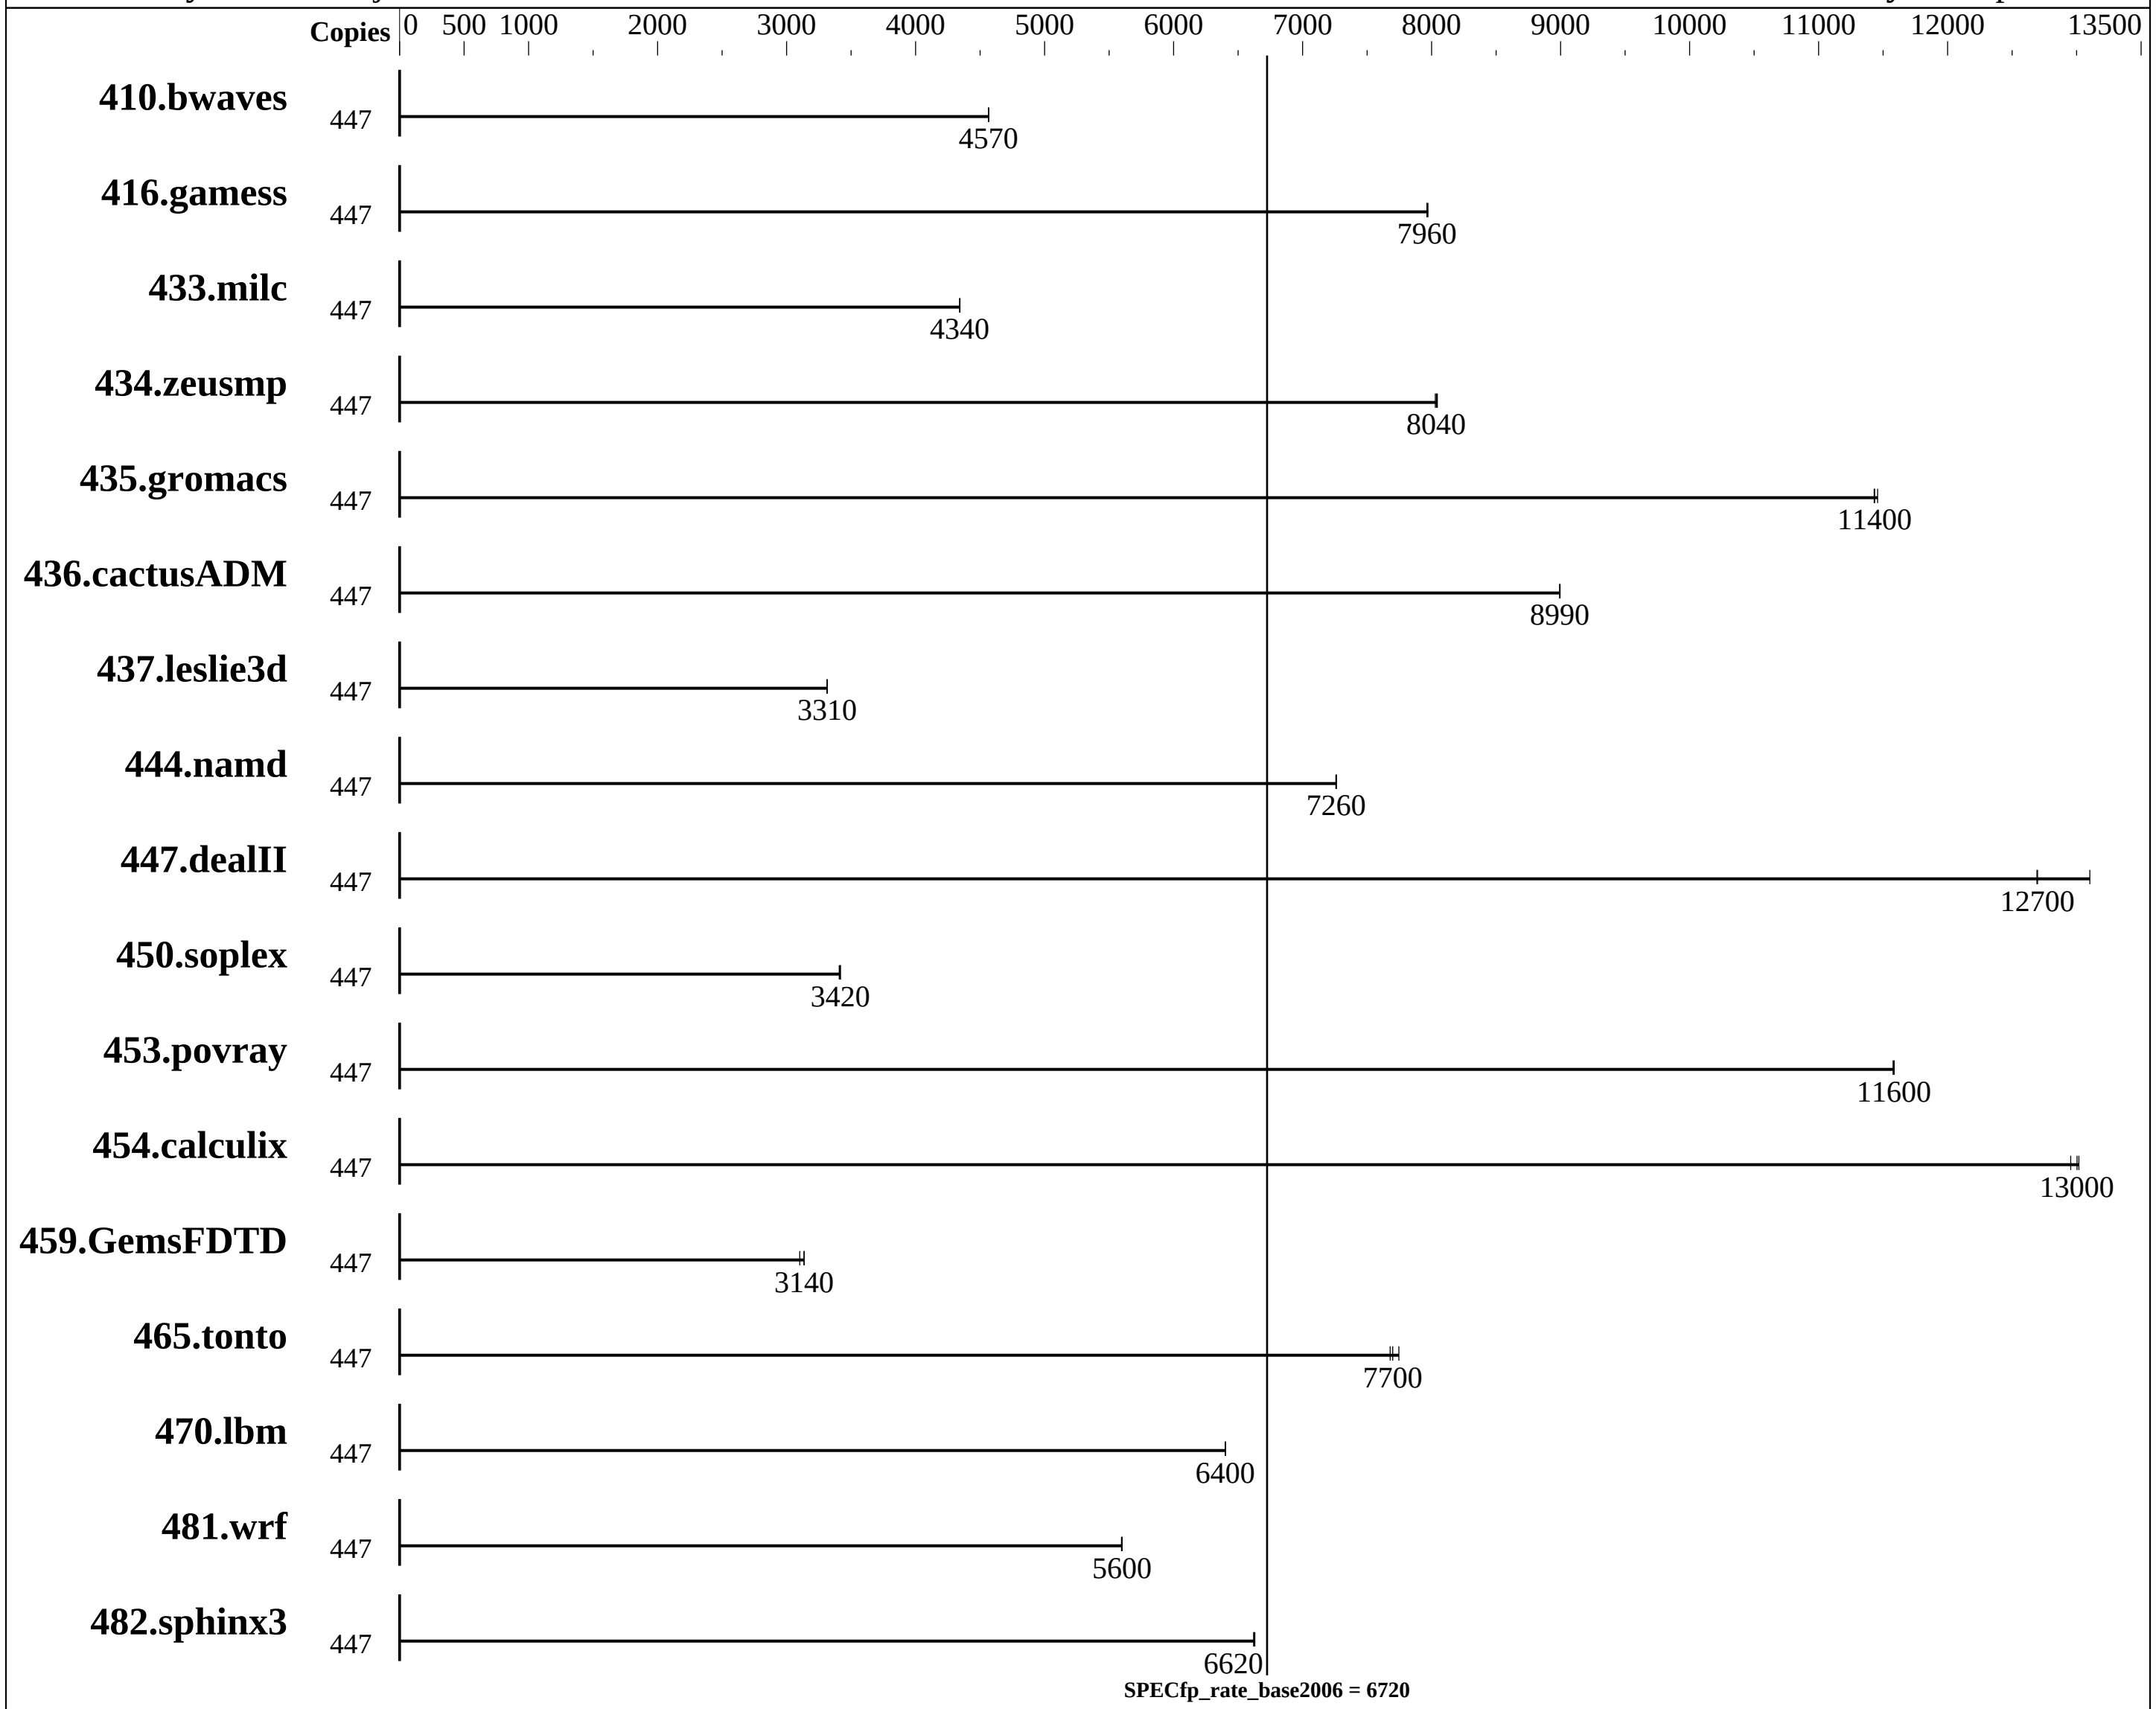

Hardware

CPU Name:	Intel Xeon Platinum 8176
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	224 cores, 8 chips, 28 cores/chip, 2 threads/core
CPU(s) orderable:	2,4,6,8 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	tmpfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8176, 2.10GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 6720

CPU2006 license: 19		**Test date:**	Nov-2017
Test sponsor:	Fujitsu	**Hardware Availability:**	Jul-2017
Tested by:	Fujitsu	**Software Availability:**	Sep-2017

L3 Cache:	38.5 MB I+D on chip per chip	Base Pointers:	32/64-bit
Other Cache:	None	Peak Pointers:	Not Applicable
Memory:	1536 GB (96 x 16 GB 2Rx4 PC4-2666V-R)	Other Software:	None
Disk Subsystem:	768 GB tmpfs		
Other Hardware:	1 x SAS HDD, 600 GB, 10.5K RPM, used for swap		

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	447	1330	4570	**1331**	**4570**	1331	4560							
416.gamess	447	1098	7970	1099	7960	**1099**	**7960**							
433.milc	447	945	4340	945	4340	**945**	**4340**							
434.zeusmp	447	506	8040	**506**	**8040**	507	8030							
435.gromacs	447	279	11400	**279**	**11400**	279	11500							
436.cactusADM	447	594	9000	594	8990	**594**	**8990**							
437.leslie3d	447	1267	3320	1268	3310	**1268**	**3310**							
444.namd	447	494	7260	494	7260	**494**	**7260**							
447.dealII	447	**403**	**12700**	390	13100	403	12700							
450.soplex	447	1094	3410	1091	3420	**1091**	**3420**							
453.povray	447	205	11600	205	11600	**205**	**11600**							
454.calculix	447	285	13000	**284**	**13000**	283	13000							
459.GemsFDTD	447	1529	3100	1512	3140	**1513**	**3140**							
465.tonto	447	573	7680	**571**	**7700**	568	7750							
470.lbm	447	**959**	**6400**	959	6400	960	6400							
481.wrf	447	892	5600	892	5600	**892**	**5600**							
482.sphinx3	447	1314	6630	**1315**	**6620**	1316	6620							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter : nohz_full=1-447 isolcpus=1-447
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Set tmpfs filesystem with:
mkdir /home/memory
mount -t tmpfs -o size=768g,rw tmpfs /home/memory
Process tuning settings:
```

Continued on next page

Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
echo always > /sys/kernel/mm/transparent_hugepage/enabled
cpu idle state set with:
cpupower idle-set -d 2
cpupower idle-set -d 3
set affinity of rcu threads to the cpu0:
for i in ‘pgrep rcu‘ ; do taskset -pc 0 $i ; done
```

Platform Notes

```
BIOS configuration:
Intel Virtualization Technology = Disabled
HWPM Support = Disabled
DCU Streamer Prefetcher = Disabled
Stale AtoS = Enabled
LLC dead line alloc = Disabled
Sub NUMA Clustering = Enabled
Fan Control = Full
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-k55j Thu Nov 23 09:53:59 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
      8 "physical id"s (chips)
      448 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
```

Continued on next page

Platform Notes (Continued)

```
        physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
        25 26 27 28 29 30
     cache size : 39424 KB

  From /proc/meminfo
     MemTotal:       1583801256 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 2
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

  uname -a:
     Linux linux-k55j 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
     (9464f67) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Nov 23 00:26

  SPEC is set to: /home/memory/speccpu
     Filesystem     Type   Size  Used Avail Use% Mounted on
     tmpfs          tmpfs  768G  9.7G  759G   2% /home/memory
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS FUJITSU V1.0.0.0 R1.21.0 for D3858-A1x            09/15/2017
    Memory:
     46x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666 MHz
     50x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/memory/speccpu/icc2018lib/ia32:/home/memory/speccpu/icc2018lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/memory/speccpu/sh10.2"
 Binaries compiled on a system with 2x Intel Xeon Platinum 8180 CPU + 384GB RAM
 memory using SUSE Linux Enterprise Server 12 SP2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -qopt-mem-layout-trans=3`

C++ benchmarks:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -qopt-mem-layout-trans=3`

Fortran benchmarks:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch`

Benchmarks using both Fortran and C:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -qopt-mem-layout-trans=3`

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevC.html
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevC.xml
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 27 12:06:15 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 December 2017.