SPEC® CFP2006 Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.10 GHz, Intel Xeon Silver 4110)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 679

CPU2006 license:	3	**Test date:**	Oct-2017
Test sponsor:	HPE	**Hardware Availability:**	Oct-2017
Tested by:	HPE	**Software Availability:**	Apr-2017

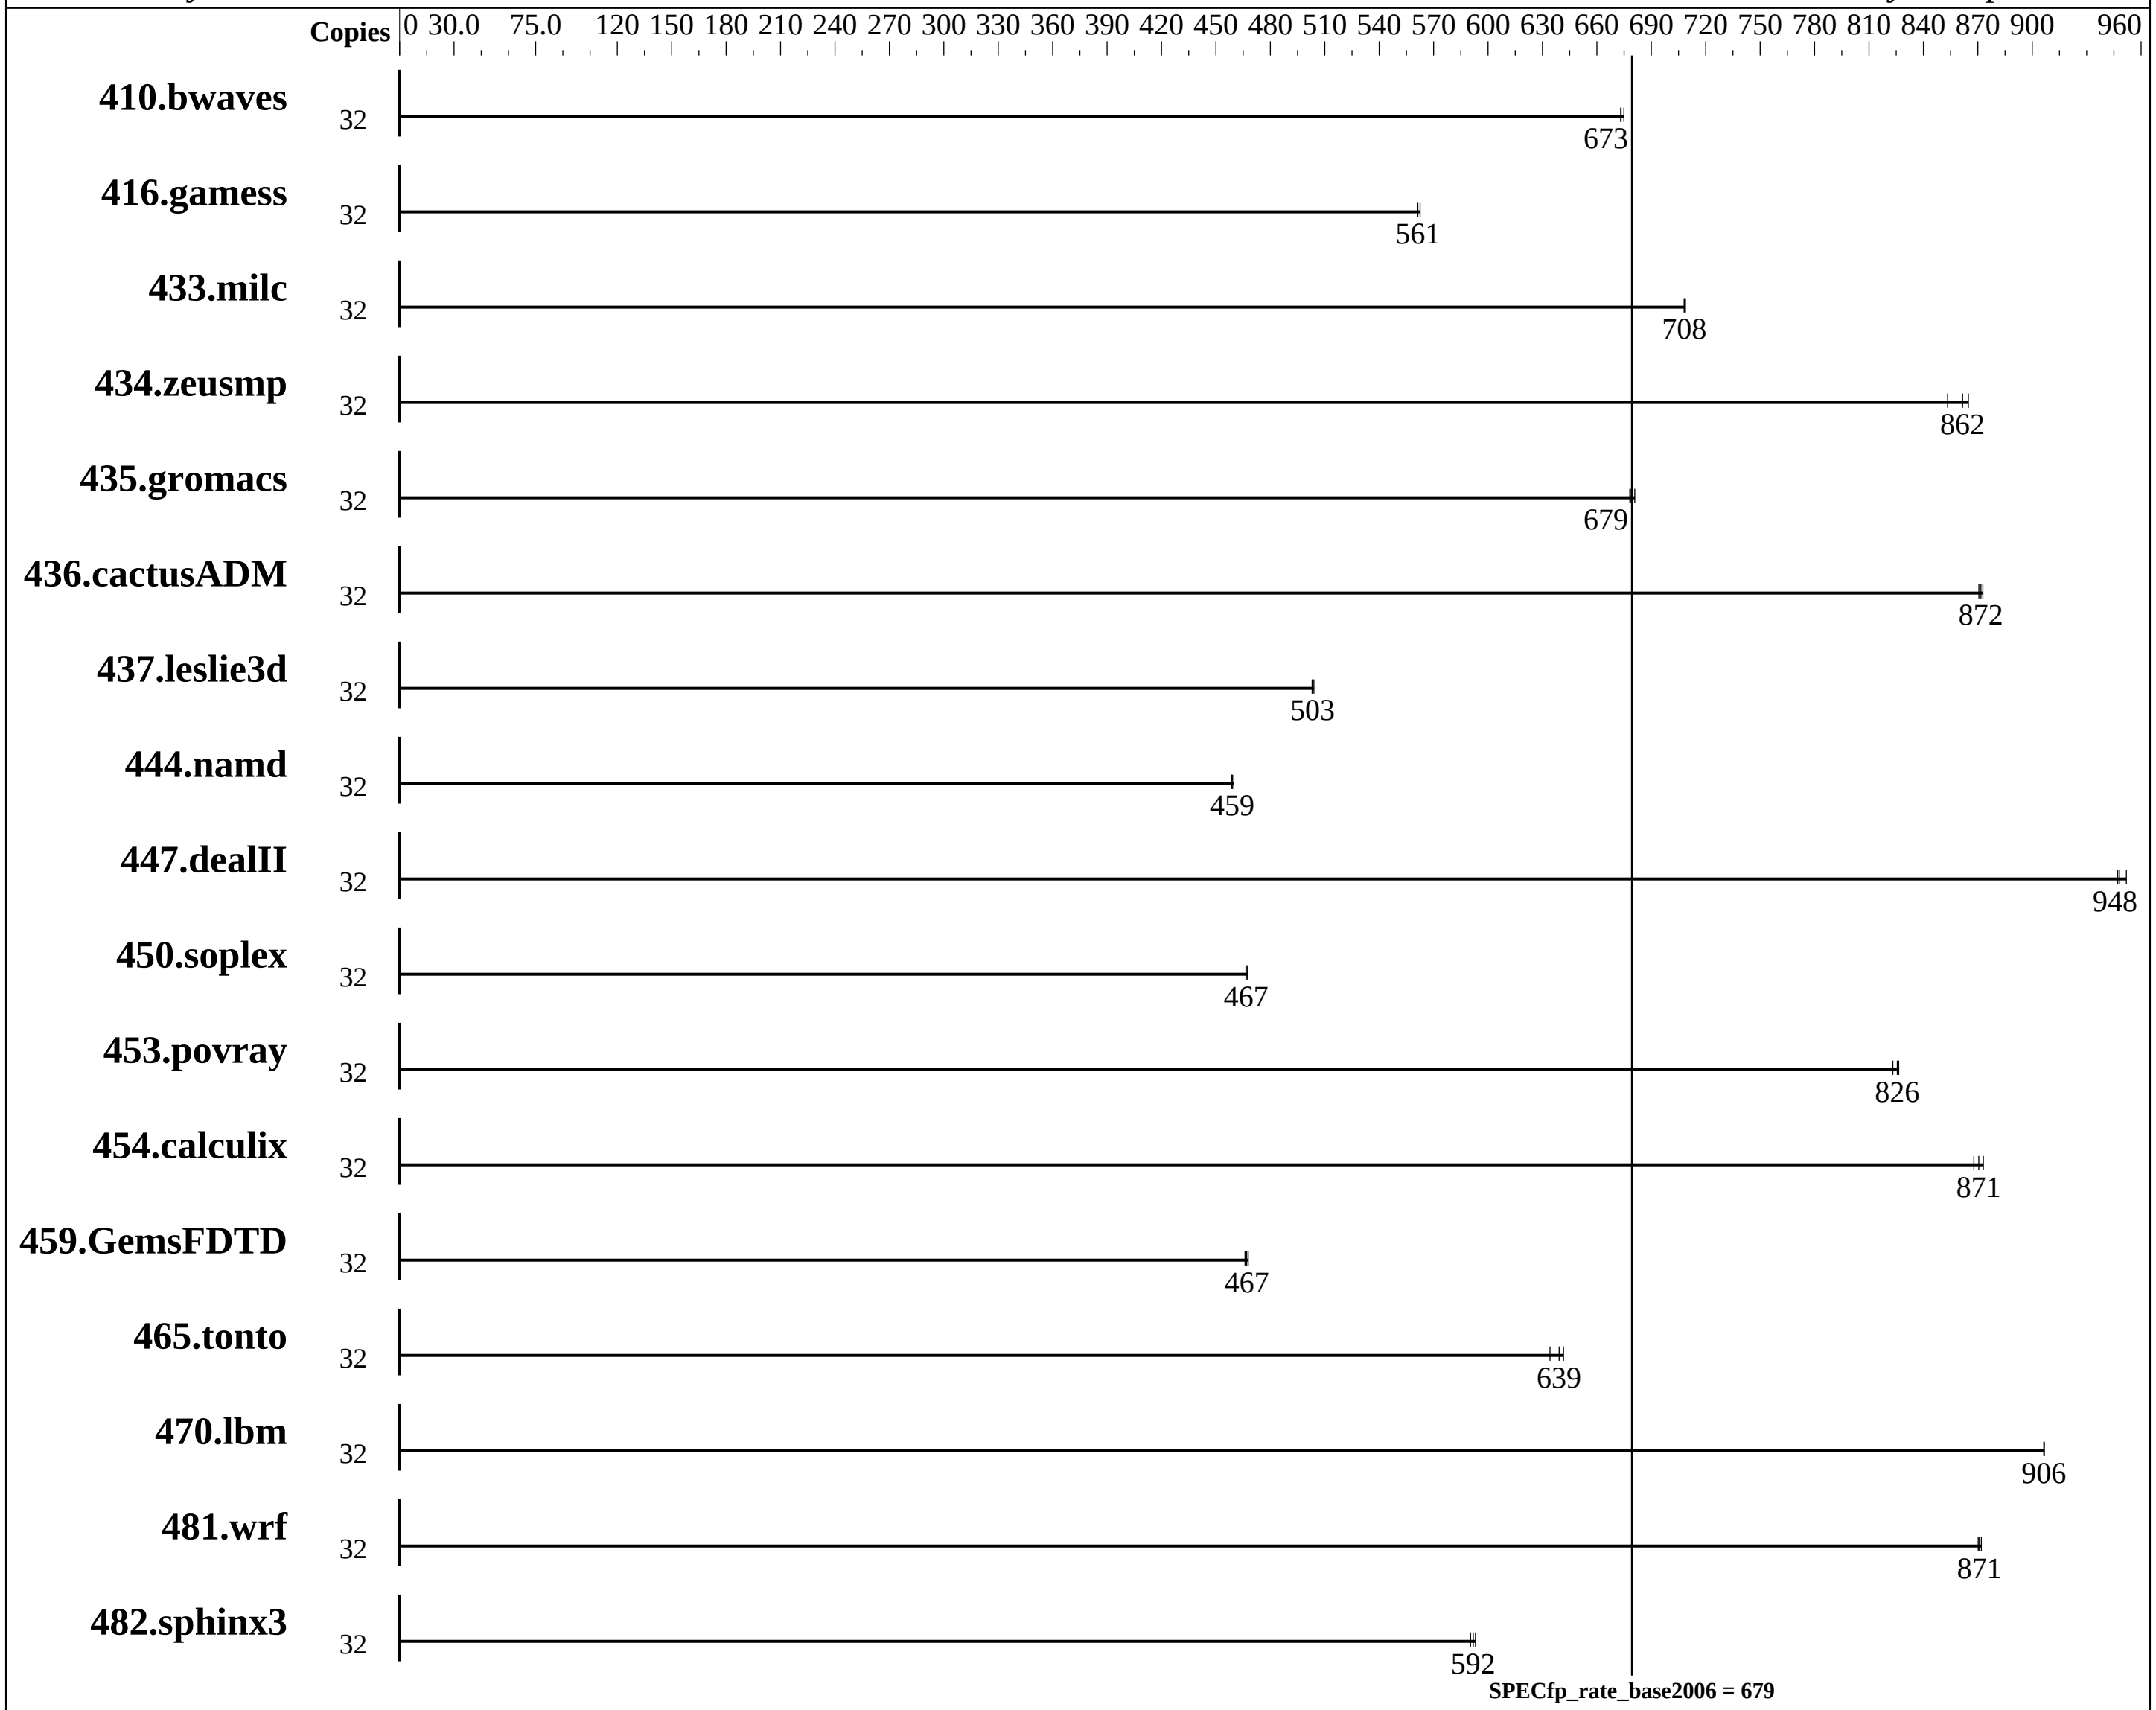

Hardware

CPU Name:	Intel Xeon Silver 4110
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chip(s)
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP2 Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	btrfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.10 GHz, Intel Xeon Silver 4110)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 679

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Apr-2017

L3 Cache:	11 MB I+D on chip per chip
Other Cache:	None
Memory:	192 GB (24 x 8 GB 2Rx8 PC4-2666V-R, running at 2400)
Disk Subsystem:	1 x 960 GB SATA SSD, RAID 0
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	Not Applicable
Other Software:	None

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	646	673	**646**	**673**	644	675							
416.gamess	32	**1116**	**561**	1116	561	1114	563							
433.milc	32	**415**	**708**	414	709	415	708							
434.zeusmp	32	**338**	**862**	337	865	341	853							
435.gromacs	32	**337**	**679**	337	678	336	681							
436.cactusADM	32	438	873	439	871	**439**	**872**							
437.leslie3d	32	597	504	**598**	**503**	598	503							
444.namd	32	558	460	**559**	**459**	559	459							
447.dealII	32	387	947	**386**	**948**	385	952							
450.soplex	32	**572**	**467**	571	467	572	467							
453.povray	32	206	826	207	823	**206**	**826**							
454.calculix	32	302	873	304	868	**303**	**871**							
459.GemsFDTD	32	726	468	729	466	**727**	**467**							
465.tonto	32	**493**	**639**	491	642	497	634							
470.lbm	32	**485**	**906**	485	906	485	907							
481.wrf	32	**410**	**871**	411	870	410	872							
482.sphinx3	32	**1054**	**592**	1052	593	1056	590							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
```

Continued on next page

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL380 Gen10
(2.10 GHz, Intel Xeon Silver 4110)

SPECfp_rate2006 = Not Run
SPECfp_rate_base2006 = 679

CPU2006 license: 3		**Test date:**	Oct-2017
Test sponsor:	HPE	**Hardware Availability:**	Oct-2017
Tested by:	HPE	**Software Availability:**	Apr-2017

Operating System Notes (Continued)

```
tuned profile set wtih "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Throughput Compute
  Minimum Processor Idle Power Core C-State set to C1E State
 Workload Profile set to Custom
  Sub-NUMA Clustering set to Disabled
 Sysinfo program /cpu2006/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on sys1-dl380-lic-srvr Thu Oct 26 22:55:19 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz
       2 "physical id"s (chips)
       32 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 8
       siblings  : 16
       physical 0: cores 0 1 2 3 4 5 6 7
       physical 1: cores 0 1 2 3 4 5 6 7
    cache size : 11264 KB

 From /proc/meminfo
    MemTotal:       197556252 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP2

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or
       release.
```

Continued on next page

Platform Notes (Continued)

```
         # Please check /etc/os-release for details about this release.
      os-release:
         NAME="SLES"
         VERSION="12-SP2"
         VERSION_ID="12.2"
         PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
         ID="sles"
         ANSI_COLOR="0;32"
         CPE_NAME="cpe:/o:suse:sles:12:sp2"

   uname -a:
      Linux sys1-dl380-lic-srvr 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC
      2016 (9464f67) x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Oct 26 17:12

   SPEC is set to: /cpu2006
      Filesystem     Type   Size  Used Avail Use% Mounted on
      /dev/sdb3      btrfs  489G   41G  448G   9% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS HPE U30 09/29/2017
     Memory:
      24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz, configured at 2400 MHz

   (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/cpu2006/lib/ia32:/cpu2006/lib/intel64:/cpu2006/sh10.2"

  Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
  memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 16 12:09:11 2018 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 January 2018.