SPEC® CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL560 Gen10
(2.30 GHz, Intel Xeon Gold 6140)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 2630

CPU2006 license:	3	**Test date:**	Dec-2017
Test sponsor:	HPE	**Hardware Availability:**	Oct-2017
Tested by:	HPE	**Software Availability:**	Apr-2017

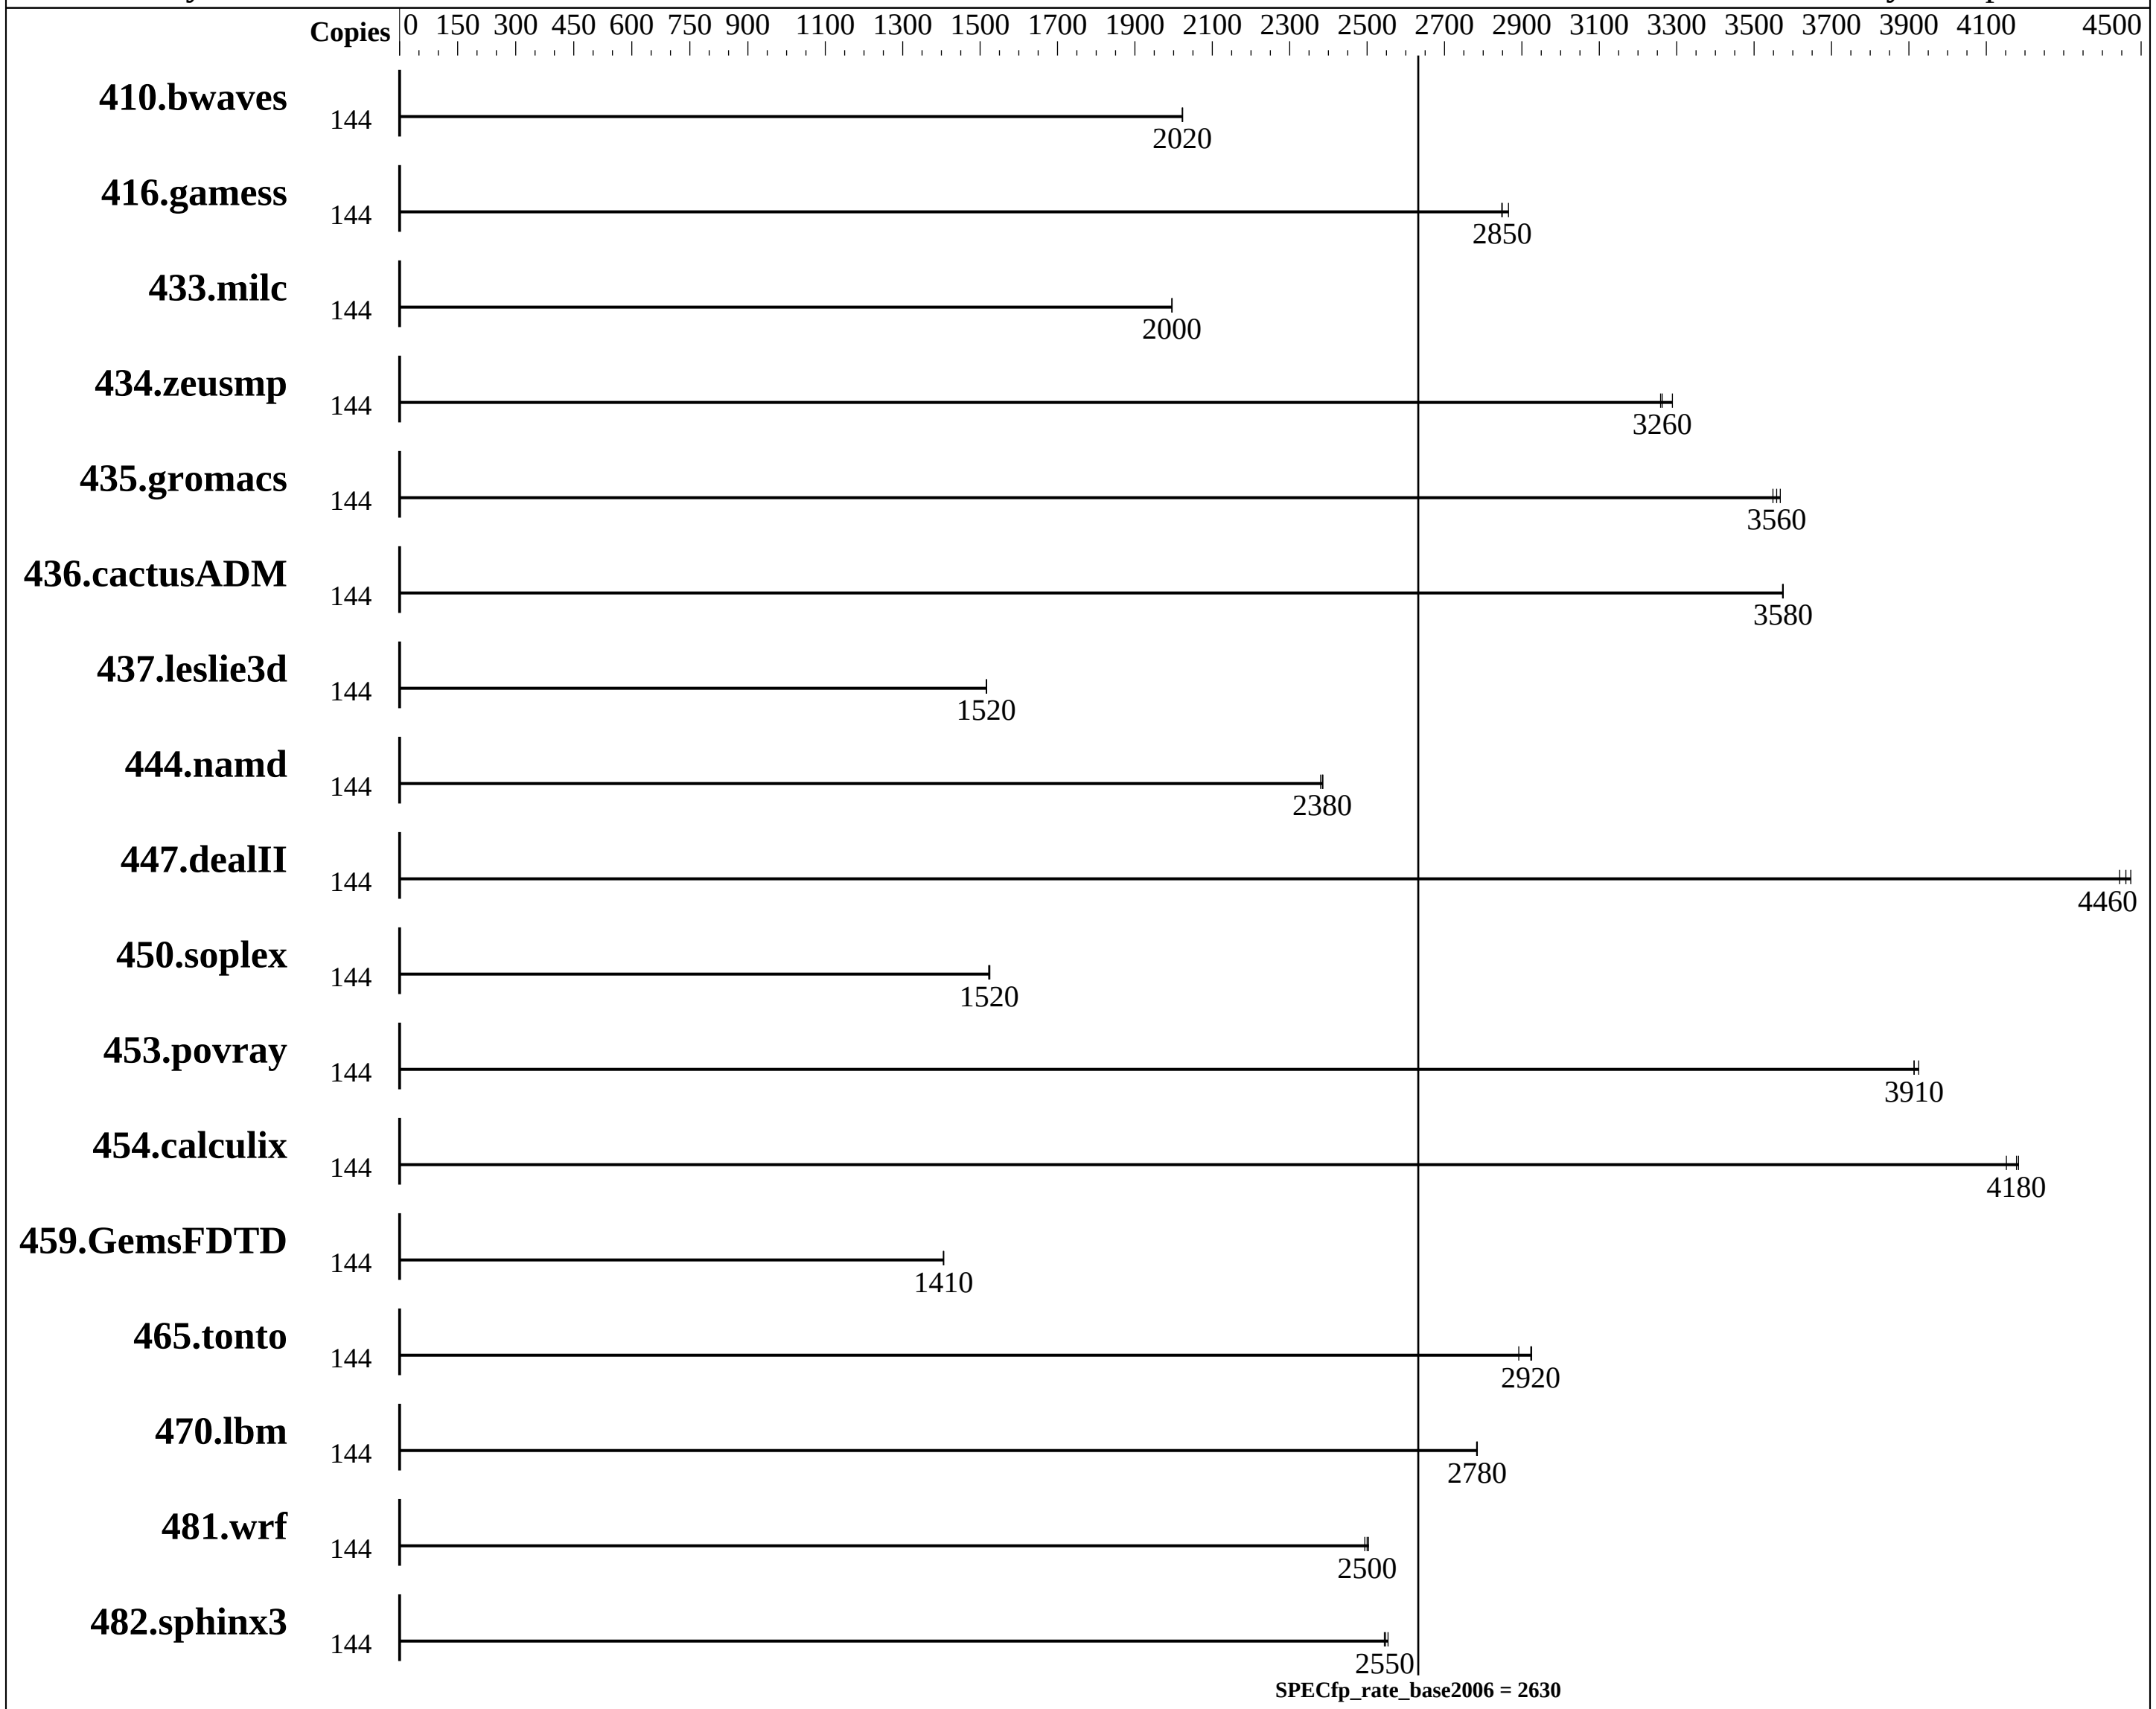

Hardware

CPU Name:	Intel Xeon Gold 6140
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	72 cores, 4 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2, 4 chip(s)
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP2 Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL560 Gen10
(2.30 GHz, Intel Xeon Gold 6140)

SPECfp_rate2006 = Not Run
SPECfp_rate_base2006 = 2630

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE
Test date: Dec-2017
Hardware Availability: Oct-2017
Software Availability: Apr-2017

L3 Cache: 24.75 MB I+D on chip per chip
Other Cache: None
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 2 x 480 GB SATA SSD, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: Not Applicable
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	144	967	2020	**967**	**2020**	968	2020							
416.gamess	144	984	2870	**990**	**2850**	990	2850							
433.milc	144	662	2000	**662**	**2000**	662	2000							
434.zeusmp	144	**402**	**3260**	398	3290	402	3260							
435.gromacs	144	**289**	**3560**	290	3550	288	3570							
436.cactusADM	144	**481**	**3580**	482	3570	481	3580							
437.leslie3d	144	892	1520	893	1520	**893**	**1520**							
444.namd	144	484	2390	**484**	**2380**	485	2380							
447.dealII	144	368	4470	**369**	**4460**	371	4440							
450.soplex	144	789	1520	787	1530	**788**	**1520**							
453.povray	144	195	3930	**196**	**3910**	196	3910							
454.calculix	144	284	4180	286	4150	**284**	**4180**							
459.GemsFDTD	144	**1087**	**1410**	1087	1410	1087	1410							
465.tonto	144	**485**	**2920**	490	2890	484	2930							
470.lbm	144	711	2780	**711**	**2780**	710	2780							
481.wrf	144	**643**	**2500**	642	2500	645	2490							
482.sphinx3	144	1099	2550	**1102**	**2550**	1103	2540							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set wtih "tuned-adm profile throughput-performance"
```

Continued on next page

Operating System Notes (Continued)

```
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
 Stale A to S set to Enabled
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Throughput Compute
  Minimum Processor Idle Power Core C-State set to C1E State
 Sysinfo program /home/cpu2006/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-smfo Mon Dec  4 19:25:53 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz
       4 "physical id"s (chips)
       144 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 18
       siblings  : 36
       physical 0: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
       physical 1: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
       physical 2: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
       physical 3: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
    cache size : 25344 KB

 From /proc/meminfo
    MemTotal:       792272496 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP2

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or
       release.
```

Continued on next page

Platform Notes (Continued)

```
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
   Linux linux-smfo 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
   (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 2 12:11

SPEC is set to: /home/cpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   852G  228G  624G  27% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS HPE U34 09/29/2017
  Memory:
   48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
    icc -m64

C++ benchmarks:
    icpc -m64

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves:	-DSPEC_CPU_LP64
416.gamess:	-DSPEC_CPU_LP64
433.milc:	-DSPEC_CPU_LP64
434.zeusmp:	-DSPEC_CPU_LP64
435.gromacs:	-DSPEC_CPU_LP64 -nofor_main
436.cactusADM:	-DSPEC_CPU_LP64 -nofor_main
437.leslie3d:	-DSPEC_CPU_LP64
444.namd:	-DSPEC_CPU_LP64
447.dealII:	-DSPEC_CPU_LP64
450.soplex:	-DSPEC_CPU_LP64
453.povray:	-DSPEC_CPU_LP64
454.calculix:	-DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD:	-DSPEC_CPU_LP64
465.tonto:	-DSPEC_CPU_LP64
470.lbm:	-DSPEC_CPU_LP64
481.wrf:	-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3:	-DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 16 12:09:25 2018 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 January 2018.