SPEC® CFP2006 Result

Fujitsu

PRIMERGY TX2550 M4, Intel Xeon Platinum 8164 2.00GHz

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 1570

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Nov-2017
Hardware Availability: Nov-2017
Software Availability: Apr-2017

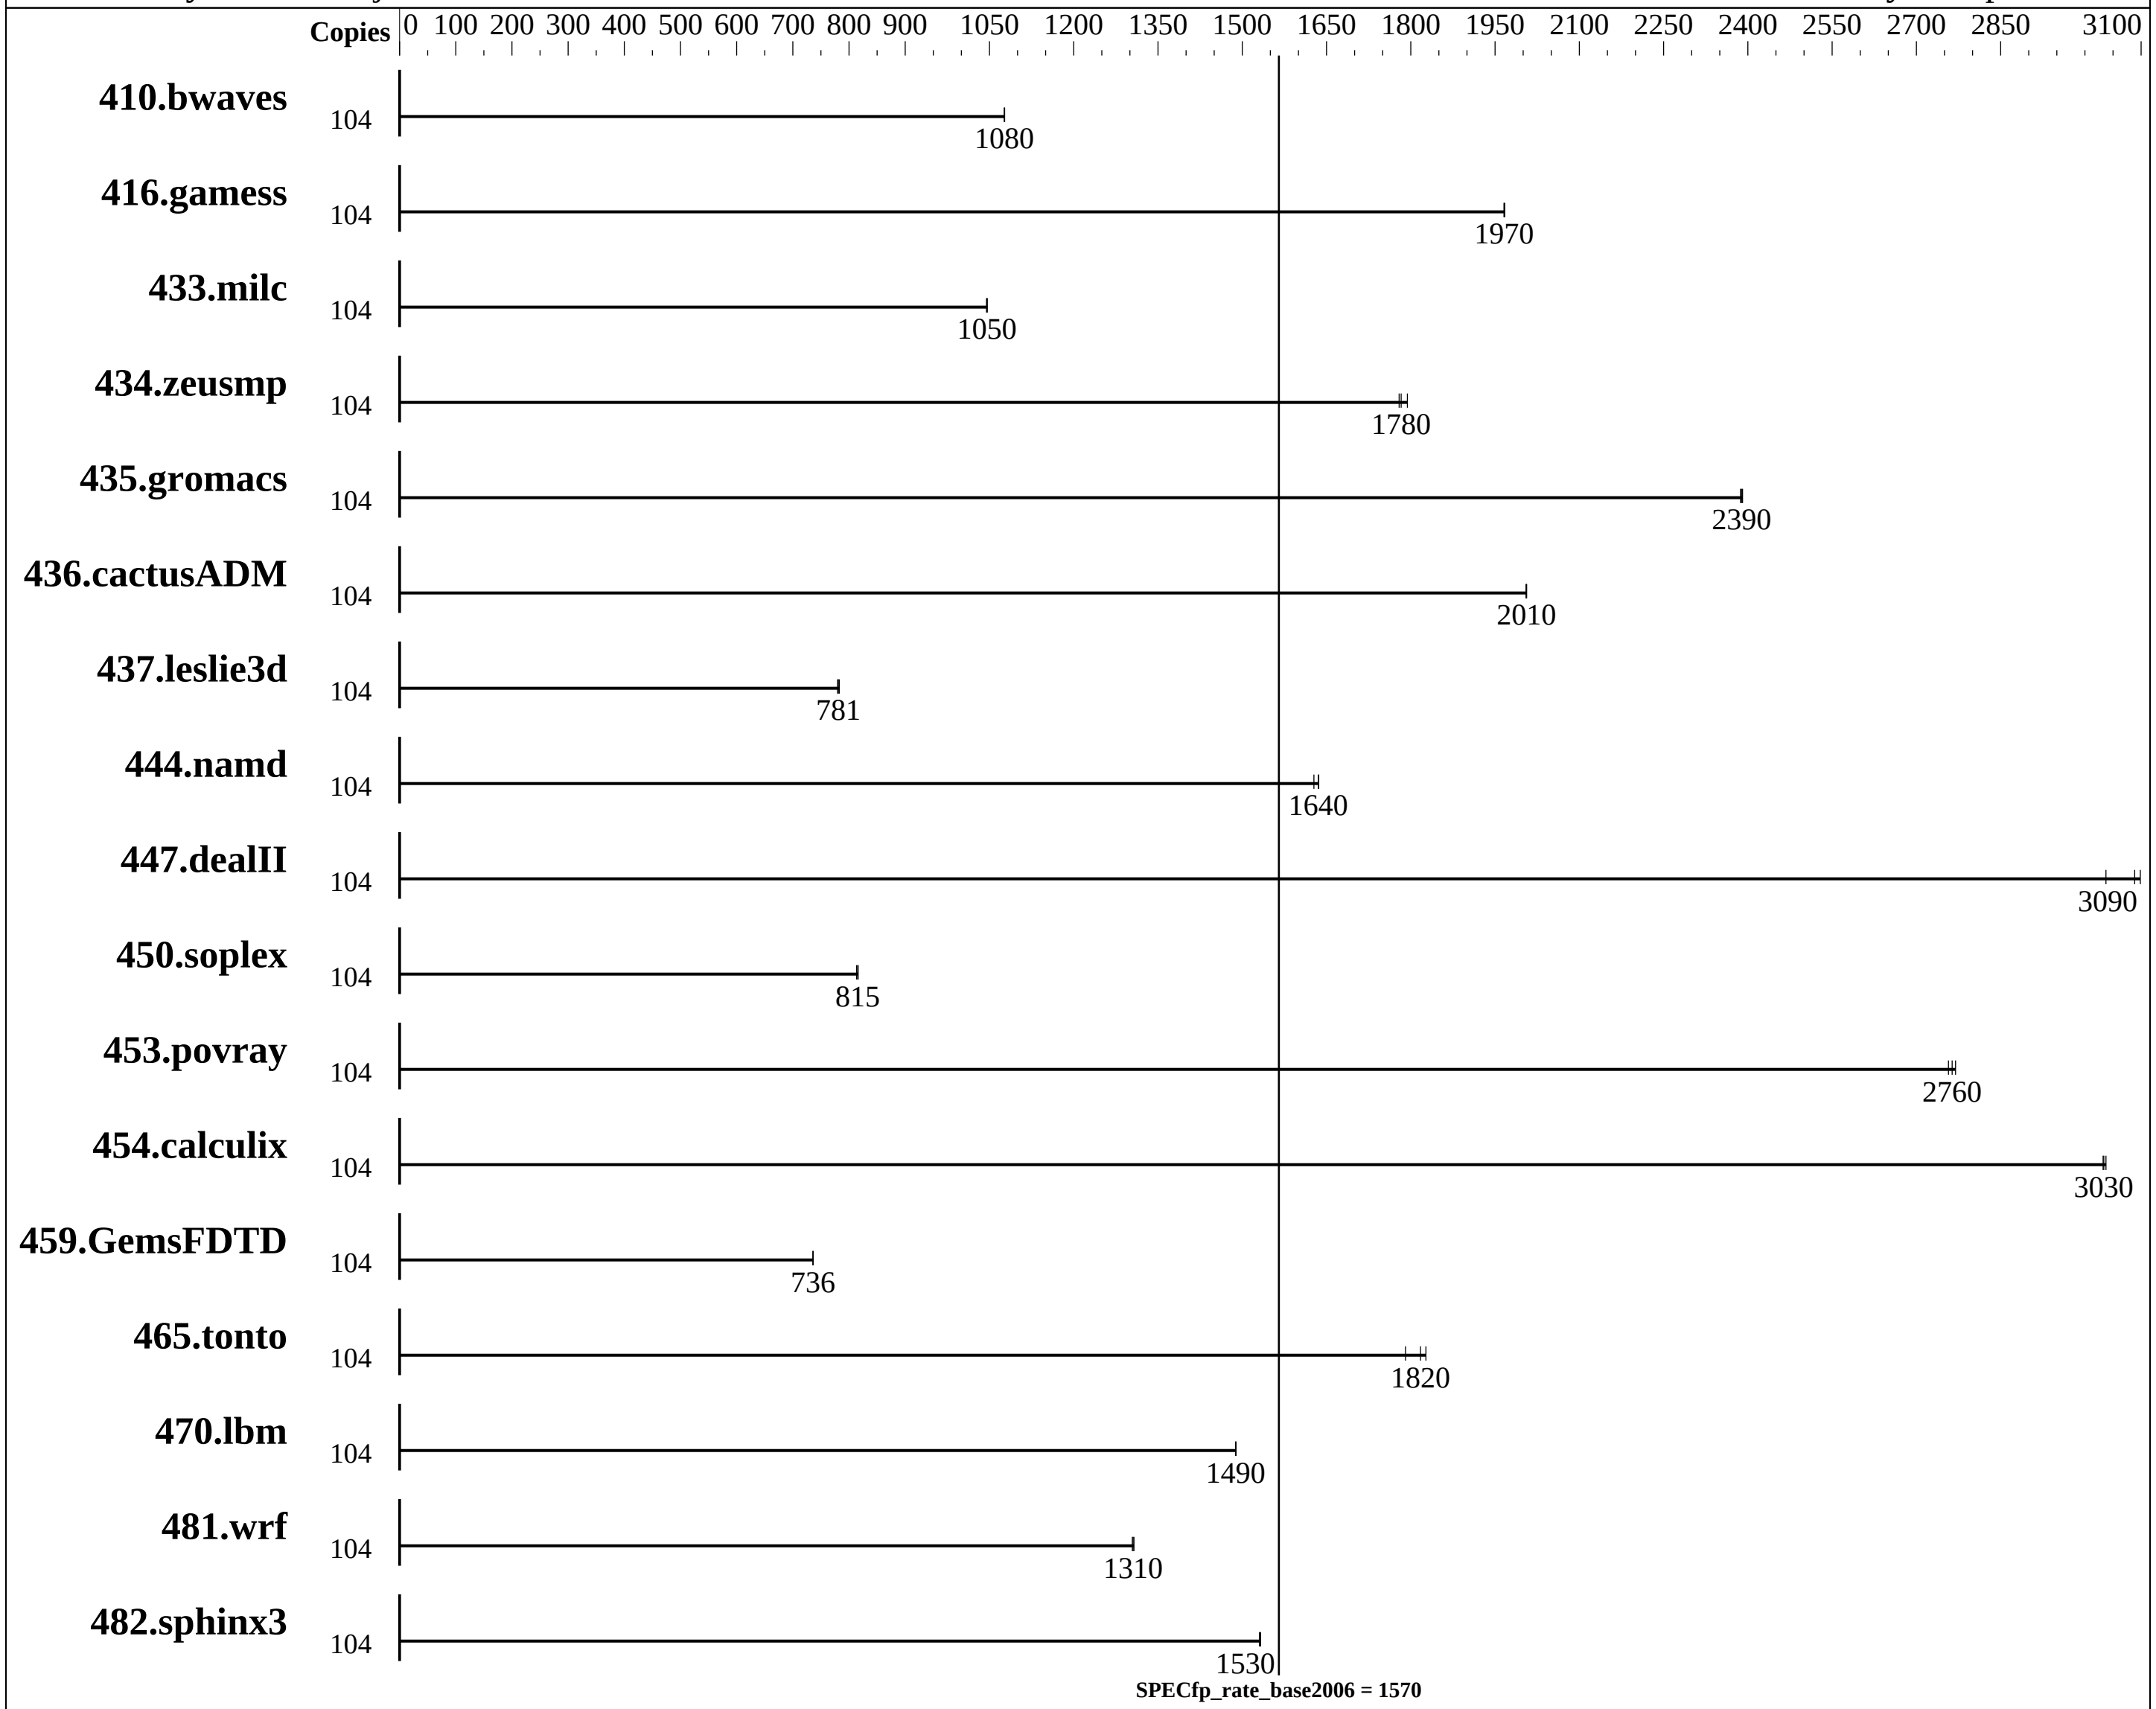

Hardware

CPU Name:	Intel Xeon Platinum 8164
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	52 cores, 2 chips, 26 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	No
File System:	tmpfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Fujitsu

PRIMERGY TX2550 M4, Intel Xeon Platinum 8164 2.00GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1570

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Nov-2017
Hardware Availability: Nov-2017
Software Availability: Apr-2017

L3 Cache:	35.75 MB I+D on chip per chip
Other Cache:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
Disk Subsystem:	384 GB tmpfs
Other Hardware:	1 x SATA HDD, 1000 GB, 7200 RPM, used for swap
Base Pointers:	32/64-bit
Peak Pointers:	Not Applicable
Other Software:	None

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	104	1313	1080	1312	1080	**1313**	**1080**							
416.gamess	104	1035	1970	**1036**	**1970**	1036	1970							
433.milc	104	914	1040	**913**	**1050**	913	1050							
434.zeusmp	104	528	1790	**531**	**1780**	532	1780							
435.gromacs	104	311	2390	**311**	**2390**	311	2390							
436.cactusADM	104	620	2010	619	2010	**620**	**2010**							
437.leslie3d	104	1254	780	1249	783	**1252**	**781**							
444.namd	104	**510**	**1640**	510	1640	512	1630							
447.dealII	104	384	3100	392	3040	**385**	**3090**							
450.soplex	104	1066	814	1063	816	**1064**	**815**							
453.povray	104	200	2770	**200**	**2760**	201	2760							
454.calculix	104	283	3030	**283**	**3030**	282	3040							
459.GemsFDTD	104	1499	736	1500	736	**1499**	**736**							
465.tonto	104	572	1790	560	1830	**563**	**1820**							
470.lbm	104	960	1490	**960**	**1490**	960	1490							
481.wrf	104	**890**	**1310**	891	1300	889	1310							
482.sphinx3	104	**1324**	**1530**	1323	1530	1324	1530							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter : nohz_full=1-103
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Set tmpfs filesystem with:
mkdir /home/memory
mount -t tmpfs -o size=384g,rw tmpfs /home/memory
Process tuning settings:
```

Continued on next page

Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

Platform Notes

```
BIOS configuration:
HWPM Support = Disabled
Intel Virtualization Technology = Disabled
Link Frequency Select = 10.4 GT/s
Sub NUMA Clustering = Enabled
IMC Interleaving = 1-way
LLC Dead Line Alloc = Disabled
Stale AtoS = Enabled
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on TX2550M4 Wed Nov 22 07:36:46 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
      2 "physical id"s (chips)
      104 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 26
      siblings  : 52
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
      26 27 28 29
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
      26 27 28 29
   cache size : 36608 KB

From /proc/meminfo
   MemTotal:       394412136 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
```

Continued on next page

Platform Notes (Continued)

```
        VERSION = 12
        PATCHLEVEL = 2
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

  uname -a:
     Linux TX2550M4 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
     (9464f67) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Nov 21 19:27

  SPEC is set to: /home/memory/speccpu
     Filesystem     Type   Size  Used Avail Use% Mounted on
     tmpfs          tmpfs  384G  4.9G  380G   2% /home/memory
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.13.0 for D3386-A1x
    11/02/2017
    Memory:
     12x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64:/home/memory/speccpu/sh10.2"

  Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
  memory using Redhat Enterprise Linux 7.2
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
  Filesystem page cache cleared with:
  shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -qopt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -qopt-mem-layout-trans=3`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevD.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 16 11:54:52 2018 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 January 2018.