



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

**SPECint®2006 = 79.9**

ASUS RS700-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6150)

**SPECint\_base2006 = 76.7**

CPU2006 license: 9016


Test date: Dec-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

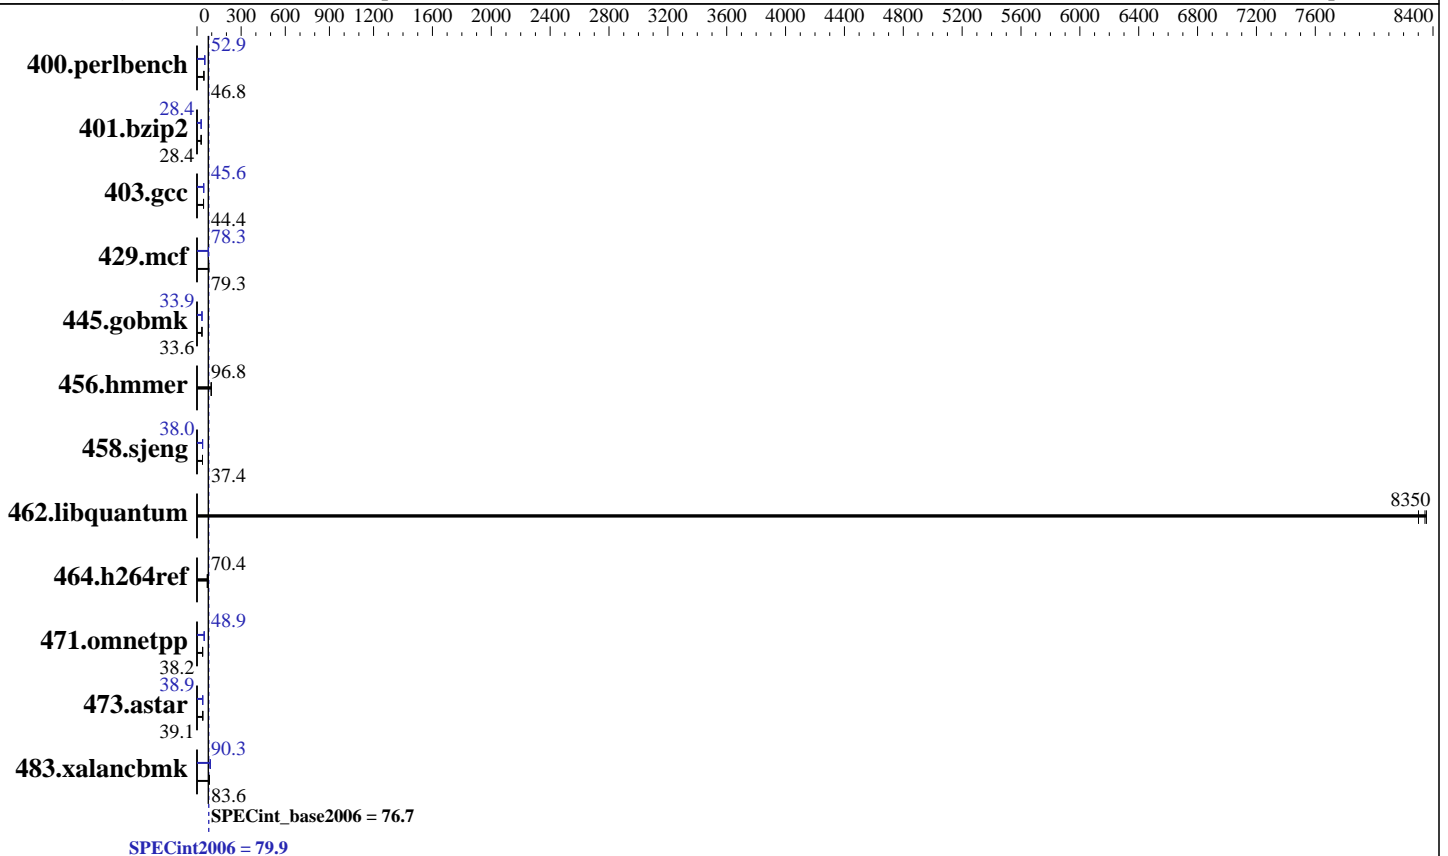

### Hardware

CPU Name: Intel Xeon Gold 6150  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip  
 CPU(s) orderable: 1, 2 chip(s)  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 24.75 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)  
 Disk Subsystem: 1 x 240 GB SATA SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release (x86\_64) 7.3 (Maipo)  
 Kernel 3.10.0-514.el7.x86\_64  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6150)

SPECint2006 = **79.9**

SPECint\_base2006 = **76.7**

CPU2006 license: 9016

Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	208	47.0	210	46.4	<u>209</u>	<u>46.8</u>	185	52.9	<u>185</u>	<u>52.9</u>	185	52.9
401.bzip2	340	28.4	<u>340</u>	<u>28.4</u>	341	28.3	<u>340</u>	<u>28.4</u>	340	28.3	340	28.4
403.gcc	182	44.3	181	44.5	<u>181</u>	<u>44.4</u>	177	45.6	<u>177</u>	<u>45.6</u>	177	45.6
429.mcf	114	80.3	<u>115</u>	<u>79.3</u>	117	78.1	119	76.9	116	78.3	<u>117</u>	<u>78.3</u>
445.gobmk	311	33.7	313	33.5	<u>312</u>	<u>33.6</u>	309	33.9	<u>310</u>	<u>33.9</u>	311	33.8
456.hammer	<u>96.4</u>	<u>96.8</u>	96.4	96.8	96.3	96.9	<u>96.4</u>	<u>96.8</u>	96.4	96.8	96.3	96.9
458.sjeng	324	37.4	324	37.3	<u>324</u>	<u>37.4</u>	318	38.0	318	38.0	<u>318</u>	<u>38.0</u>
462.libquantum	2.50	8300	<u>2.48</u>	<u>8350</u>	2.48	8360	2.50	8300	<u>2.48</u>	<u>8350</u>	2.48	8360
464.h264ref	<u>314</u>	<u>70.4</u>	314	70.4	314	70.5	<u>314</u>	<u>70.4</u>	314	70.4	314	70.5
471.omnetpp	<u>164</u>	<u>38.2</u>	164	38.2	163	38.2	127	49.4	128	48.7	<u>128</u>	<u>48.9</u>
473.astar	179	39.1	<u>180</u>	<u>39.1</u>	180	39.1	<u>180</u>	<u>38.9</u>	180	39.0	181	38.8
483.xalancbmk	82.9	83.2	<u>82.5</u>	<u>83.6</u>	82.4	83.7	<u>77.5</u>	89.0	<u>76.4</u>	<u>90.3</u>	76.2	90.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:

SNC = Disabled

IMC interleaving = AUTO

Patrol Scrub = Disabled

VT-d = Disabled

HyperThreading = Disabled

Sysinfo program /spec2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on localhost.localdomain Sun Dec 10 17:30:15 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6150 CPU @ 2.70GHz

2 "physical id"s (chips)

36 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECint2006 = 79.9

ASUS RS700-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6150)

SPECint\_base2006 = 76.7

CPU2006 license: 9016

Test date: Dec-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

### Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
siblings  : 18
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 25344 KB
```

From /proc/meminfo

```
MemTotal:      790962964 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 8 11:27

SPEC is set to: /spec2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   220G  27G  194G  12% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0601 10/17/2017

Memory:

24x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint2006 = 79.9**

ASUS RS700-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6150)

**SPECint\_base2006 = 76.7**

**CPU2006 license:** 9016

**Test date:** Dec-2017

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Jul-2017

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Apr-2017

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,3"

LD\_LIBRARY\_PATH = "/spec2006/lib/ia32:/spec2006/lib/intel64:/spec2006/sh10.2"

OMP\_NUM\_THREADS = "36"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint2006 = 79.9**

ASUS RS700-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6150)

**SPECint\_base2006 = 76.7**

**CPU2006 license:** 9016

**Test date:** Dec-2017

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Jul-2017

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Apr-2017

## Base Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
-auto-p32  
C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64  
400.perlbench: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32  
445.gobmk: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32  
C++ benchmarks (except as noted below):  
icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32  
473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint2006 = 79.9**

ASUS RS700-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6150)

**SPECint\_base2006 = 76.7**

**CPU2006 license:** 9016

**Test date:** Dec-2017

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Jul-2017

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Apr-2017

## Peak Portability Flags (Continued)

```

403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.aster: -DSPEC_CPU_LP64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -qopt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div -auto-ilp32 -qopt-prefetch

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
          -qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
          -qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2)

456.hmmer: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

```

C++ benchmarks:

```

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
              -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -qopt-ra-region-strategy=block
              -Wl,-z,muldefs -L/sh10.2 -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint2006 = 79.9**

ASUS RS700-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6150)

**SPECint\_base2006 = 76.7**

**CPU2006 license:** 9016

**Test date:** Dec-2017

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Jul-2017

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform-Settings-z11-V1.3-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform-Settings-z11-V1.3-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 27 10:49:35 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 February 2018.