SPEC® CFP2006 Result

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6138, 2.00 GHz)

SPECfp®_rate2006 = 2770

SPECfp_rate_base2006 = 2720

CPU2006 license: 9019		**Test date:**	Dec-2017
Test sponsor:	Cisco Systems	**Hardware Availability:**	Aug-2017
Tested by:	Cisco Systems	**Software Availability:**	May-2017

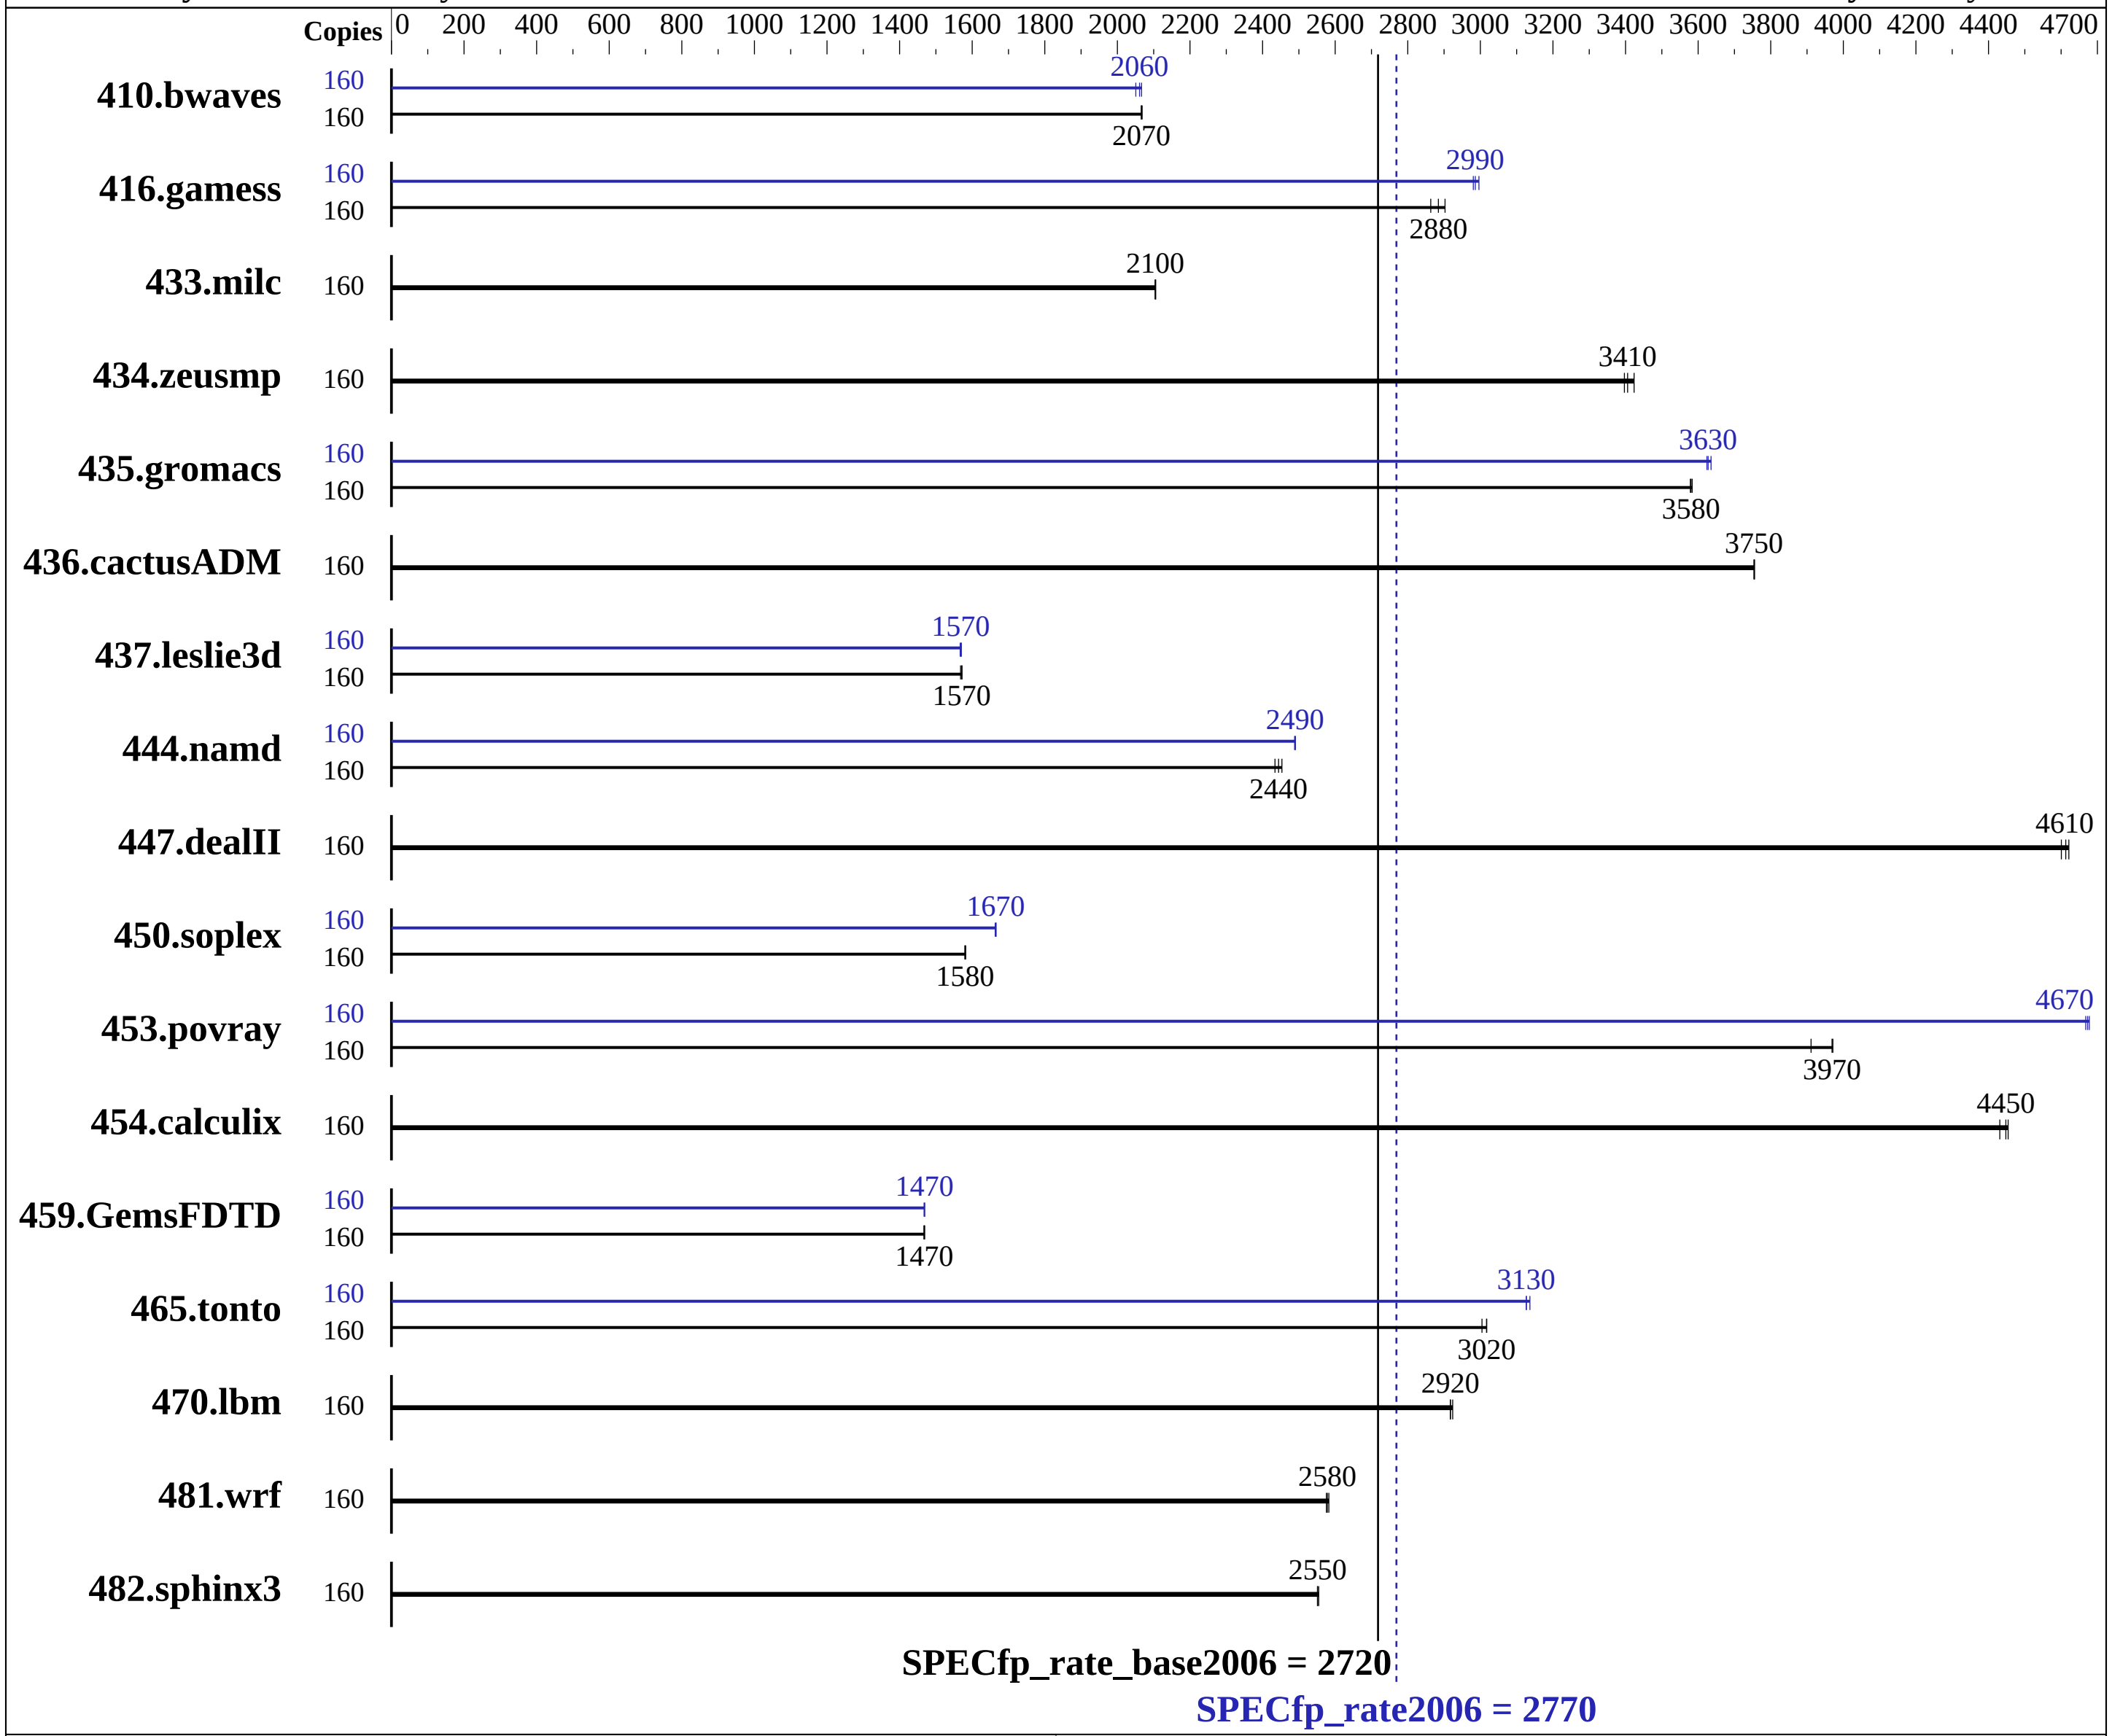

Hardware

CPU Name:	Intel Xeon Gold 6138
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	80 cores, 4 chips, 20 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

L3 Cache: 27.5 MB I+D on chip per chip
Other Cache: None
Memory: 768 GB (48 x 16 GB 2Rx4 PC4-2666V-R)
Disk Subsystem: 1 x 600 GB SAS HDD, 10K RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	160	1053	2070	1051	2070	**1052**	**2070**	160	1060	2050	**1055**	**2060**	1052	2070
416.gamess	160	1094	2860	**1086**	**2880**	1079	2900	160	**1049**	**2990**	1046	3000	1051	2980
433.milc	160	698	2100	698	2110	**698**	**2100**	160	698	2100	698	2110	**698**	**2100**
434.zeusmp	160	429	3400	**428**	**3410**	425	3420	160	429	3400	**428**	**3410**	425	3420
435.gromacs	160	319	3580	**319**	**3580**	319	3580	160	**315**	**3630**	315	3620	314	3640
436.cactusADM	160	**509**	**3750**	509	3760	509	3750	160	**509**	**3750**	509	3760	509	3750
437.leslie3d	160	959	1570	957	1570	**957**	**1570**	160	958	1570	**959**	**1570**	960	1570
444.namd	160	**525**	**2440**	523	2450	527	2430	160	515	2490	516	2490	**515**	**2490**
447.dealII	160	396	4620	**397**	**4610**	398	4600	160	396	4620	**397**	**4610**	398	4600
450.soplex	160	845	1580	843	1580	**844**	**1580**	160	**801**	**1670**	801	1670	802	1660
453.povray	160	214	3970	218	3910	**214**	**3970**	160	182	4670	182	4680	**182**	**4670**
454.calculix	160	**297**	**4450**	296	4450	298	4430	160	**297**	**4450**	296	4450	298	4430
459.GemsFDTD	160	1157	1470	1156	1470	**1156**	**1470**	160	**1156**	**1470**	1156	1470	1157	1470
465.tonto	160	524	3000	**522**	**3020**	522	3020	160	502	3140	**504**	**3130**	504	3130
470.lbm	160	754	2920	**753**	**2920**	752	2920	160	754	2920	**753**	**2920**	752	2920
481.wrf	160	**693**	**2580**	694	2580	692	2580	160	**693**	**2580**	694	2580	692	2580
482.sphinx3	160	1221	2550	1222	2550	**1222**	**2550**	160	1221	2550	1222	2550	**1222**	**2550**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Intel HyperThreading Technology set to Enabled
CPU performance set to Enterprise
```

Continued on next page

Platform Notes (Continued)

```
    Power Performance Tuning set to OS Controls
    SNC set to Enabled
    IMC Interleaving set to 1-way Interleave
    Patrol Scrub set to Disabled
     Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993
     Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
     running on linux-xy4f Sat Dec 16 19:40:46 2017

     This section contains SUT (System Under Test) info as seen by
     some common utilities.  To remove or add to this section, see:
       http://www.spec.org/cpu2006/Docs/config.html#sysinfo

     From /proc/cpuinfo
        model name : Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz
           4 "physical id"s (chips)
           160 "processors"
        cores, siblings (Caution: counting these is hw and system dependent.  The
        following excerpts from /proc/cpuinfo might not be reliable.  Use with
        caution.)
           cpu cores : 20
           siblings  : 40
           physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
           physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
           physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
           physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
        cache size : 28160 KB

     From /proc/meminfo
        MemTotal:       791027172 kB
        HugePages_Total:       0
        Hugepagesize:       2048 kB

     From /etc/*release* /etc/*version*
        SuSE-release:
           SUSE Linux Enterprise Server 12 (x86_64)
           VERSION = 12
           PATCHLEVEL = 2
           # This file is deprecated and will be removed in a future service pack or
           release.
           # Please check /etc/os-release for details about this release.
        os-release:
           NAME="SLES"
           VERSION="12-SP2"
           VERSION_ID="12.2"
           PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
           ID="sles"
           ANSI_COLOR="0;32"
           CPE_NAME="cpe:/o:suse:sles:12:sp2"

     uname -a:
        Linux linux-xy4f 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
        (9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page

Platform Notes (Continued)

```
 run-level 3 Dec 16 08:33

 SPEC is set to: /home/cpu2006-1.2
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda1      xfs   224G   47G  178G  21% /
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS Cisco Systems, Inc. B480M5.3.2.0.196.0516171125 05/16/2017
   Memory:
    48x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on
past performance using the historical hardware and/or
software described on this result page.

The system as described on this result page was formerly
generally available.  At the time of this publication, it may
not be shipping, and/or may not be supported, and/or may fail
to meet other tests of General Availability described in the
SPEC OSG Policy document, http://www.spec.org/osg/policy.html

This measured result may not be representative of the result
that would be measured were this benchmark run with hardware
```

Continued on next page

General Notes (Continued)

```
and software available as of the publication date.
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32`
`-qopt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-D_FILE_OFFSET_BITS=64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`
482.sphinx3: `-DSPEC_CPU_LP64`

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-fno-alias` `-auto-ilp32` `-qopt-mem-layout-trans=3`

447.dealII: `basepeak = yes`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-qopt-malloc-options=3` `-qopt-mem-layout-trans=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-unroll4` `-qopt-mem-layout-trans=3`

Fortran benchmarks:

410.bwaves: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-unroll2` `-inline-level=0` `-scalar-rep-`

434.zeusmp: `basepeak = yes`

437.leslie3d: `Same as 410.bwaves`

459.GemsFDTD: `Same as 410.bwaves`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-unroll4` `-auto` `-inline-calloc` `-qopt-malloc-options=3`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-qopt-prefetch` `-auto-ilp32` `-qopt-mem-layout-trans=3`

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml